

卫华让世界轻松起来

WEIHUA MAKES THE WORLD EASIER



卫华集团微信公众号



卫华股份微信公众号

总部地址:中国·河南省长垣市山海大道18号
公司传真:0373-888 7665
销售电话:0373-888 7666 400 0058 886
售后电话:400 7790 686
公司网址:www.cranewh.com
人才热线:0373-888 7510

HQ add: No.18 Shanhai Road,Changyuan City,Henan Province,China
Fax: 0373-888 7665
Sales Tel: 0373-888 7666 400 0058 886
After-sale Tel: 400 7790 686
Website: www.cranewh.com
HR hotline: 0373-888 7510

本概况所有图片及文字信息受法律保护,未经卫华集团许可,不得擅自使用,违者必究!

 WEIHUA

 卫华起重
WEI HUA CRANE

20/5t

5t

产品样本
PRODUCT CATALOG

防爆桥机类

EXPLOSION-PROOF
OVERHEAD CRANE

■ 制造业单项冠军示范企业 ■ 全国质量标杆 ■ 中国机械工业百强 ■ 国家技术创新示范企业

产品分类
PRODUCT CLASSIFICATION

新型吊钩桥式起重机 (符合FEM DIN等欧洲标准)
New-type overhead crane with hook (meetFEM.DINstandards)

双梁桥式起重机
Double girder overhead crane

卫华集团简介

GENERAL INTRODUCTION OF WEIHUA GROUP

卫华集团创建于1988年，是以研制桥门式起重机械、港口机械、电动葫芦、减速机、矿用机械、停车设备等产品为主的装备制造和以建筑工程总承包为主的大型企业集团。

卫华集团是中国重型机械工业协会、中国物料搬运协会和桥式起重机分会副理事长单位，先后荣获“制造业单项冠军示范企业”“中国机械工业百强”“全国守合同重信用企业”“千户集团企业”“全国质量标杆”“省长质量奖”等500多项荣誉称号。

作为国家技术创新示范企业、国家火炬计划重点高新技术企业，卫华拥有国家地方联合工程研究中心、国家认定企业技术中心、国家认可技术检验检测中心、博士后科研工作站、院士工作站等24个国家、省级研发平台。

以中国科学院院士杨叔子、中国工程院院士张铁岗为带头人的600人的科研团队，先后承接国家“863计划”“国家科技支撑计划”“国家火炬计划”项目，拥有授权专利941项，参与国际、国家、行业、地方标准119项。先后获得省部、市级科技进步奖项98项，获政府鉴定科技成果104项，其中创造世界纪录1项、国际领先4项、国际先进6项、国内领先93项。

在全球，卫华起重机械产品广泛应用于机械、冶金、矿山、电力、水利、铁路、港口、石油、化工等行业，服务于国内外大型企业和重点工程建设，并远销美国、英国、法国、俄罗斯、澳大利亚等130多个国家和地区。

创卫华国际品牌、兴中华民族工业。卫华将在“绿色化、智能化、定制化、网络化”方面，不断创新，为“卫华让世界轻松起来”的企业愿景而奋进。

1988

◆ 创建于1988年

500⁺

◆ 荣获500多项荣誉称号

130⁺

◆ 产品销往130多个国家和地区

GENERAL INTRODUCTION OF WEIHUA GROUP

Founded in 1988, Weihua Group is a large-scale enterprise mainly engaged in machinery manufacturing including overhead crane, gantry crane, harbor machinery, electric hoist, reducer, mining machinery, parking equipment, etc, and EPC.

Weihua Group serves as Deputy Chief Director of the Heavy Machinery Industry Association , Material handling Association and the Sub-association of Bridge Crane in China. It has been honored with more than 500 awards such as “National Manufacturing Individual Champion Demonstration Enterprise”, “Top 100 Chinese Machinery Enterprise”, “Contract-honoring and Promise-keeping Enterprise of China”, “Qianhu Enterprise”, “National Quality Standard” , “Quality Award of Henan Provincial Governor” .

As National Innovation Demonstration Enterprise and Key High-Tech Enterprise of National Torch Plan, Weihua Group has established more than 24 national and provincial R&D platform such as United Engineering Research Center, National Enterprise Technology Center, National Technology and Inspection Center, Post-doctoral Scientific Research Workstation, Academician workstation.

Led by Mr. Yang Shuzi, the Academician of Chinese Academy of Sciences and Mr. Zhang Tiegang, the academician of Chinese Academy of Engineering, Weihua R&D team with more than 600 persons has undertaken “National 863 Program” , “National Science Supporting Program” and “National Torch Plan” . It has obtained 941 issued patents and participated in drafting 119 international, national, industrial, local standards. It also has won 98 Provincial-level Scientific and Technological Progress Awards, 104 Scientific and Technological Achievement identified by government, including 1world record, 4 international leading achievement, 6 international advanced achievements, and 93 domestic leading achievements.

Weihua’ s products have been exported to more than 130 countries and regions, including America, United Kingdom, France, Russia, Australia etc. which are widely used in various fields, including machinery, metallurgy, mining, electricity, water conservancy, railway, harbor, petroleum, chemical industry and etc. They have been serving large enterprises and key construction projects at home .

Create Weihua international brand, revitalize Chinese national industry. Weihua will keep on continuous innovation in terms of “greenization, intelligentize, customization, internet” and strive for the enterprise’ s vision of “Weihua Makes The World Easier” .

HB型防爆钢丝绳电动葫芦


HB Model Explosion Proof Wire Rope Electric Hoist

产品概述:

- 1.HB防爆钢丝绳电动葫芦为系列产品,机械结构与普通CD、HC电动葫芦一致。
- 2.防爆标志分别为ExdIIBT4、ExdIICT4、DIPA21TA, T4及Exd I Mb。
- 3.工作级别为M3,工作环境温度为一20℃~40℃。


Product Introduction:

1. The mechanical structure for Series of HB Explosion-proof electric hoists is same with common CD、HC electric hoists.
2. For each of the Explosion-proof sign is ExdIIBT4、ExdIICT4、DIPA21TA, T4 and Exd I Mb.
3. Working class M3, Work environment temperature-20~40℃.

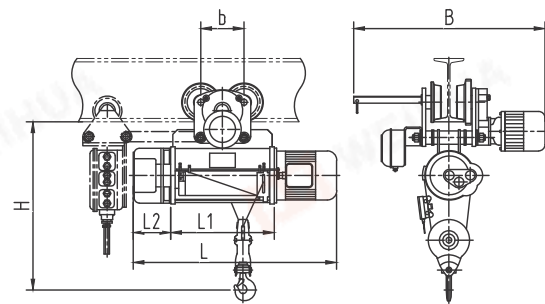


HB 0.25-5吨 (H=6-9米)

Model HB 0.25-5t (H=6-9m)

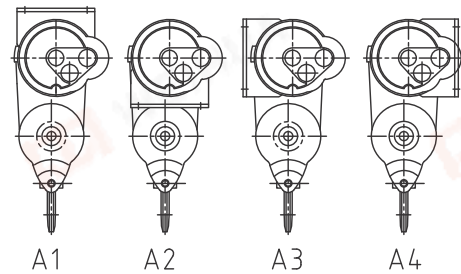


HB型固定式

Model HB Stationary

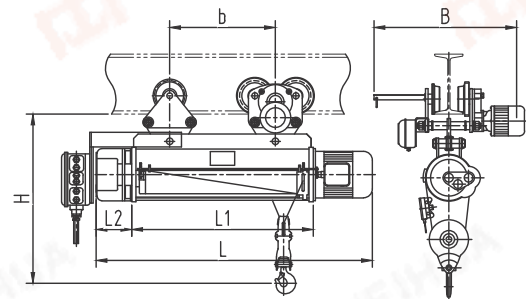


HB 0.5-5吨 (H=12-30米)

Model HB 0.5-5t (H=12-30m)

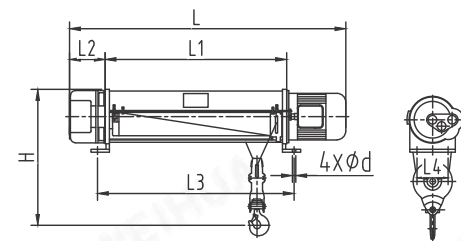


HB 固定式0.5-5吨 (H=12-30米)

Model HB Stationary 0.5-5t (H=12-30m)

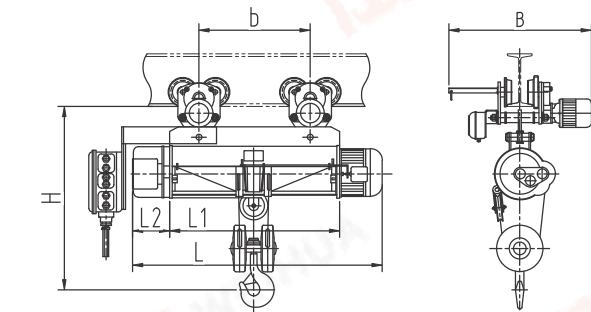


HB 10吨 (H=9-30米)

Model HB 10t (H=9-30m)

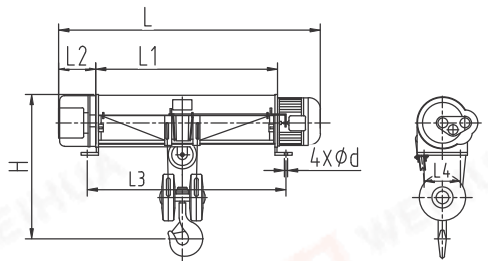


HB固定式 10吨 (H=9-30米)

Model HB Stationary 10t (H=9-30m)

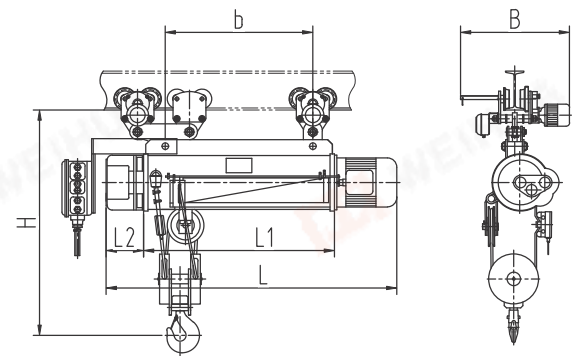


HB 16吨 (H=9-30米)

Model HB 16t (H=9-30m)

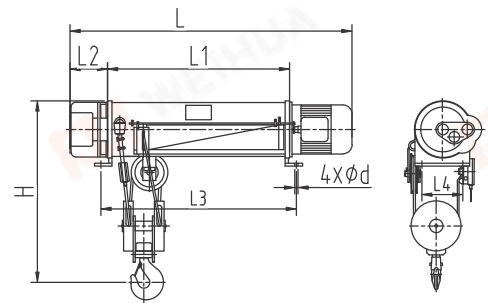


HB 固定式 16吨 (H=9-30米)

Model HB Stationary 16t (H=12-30m)

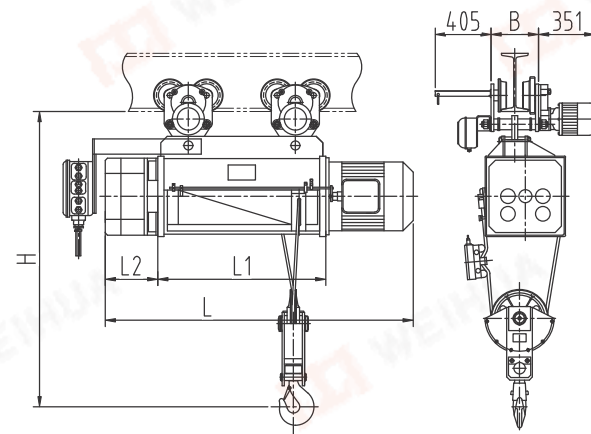

HB 16吨 (H=12-48米)

Model HB 16t (H=12-48m)

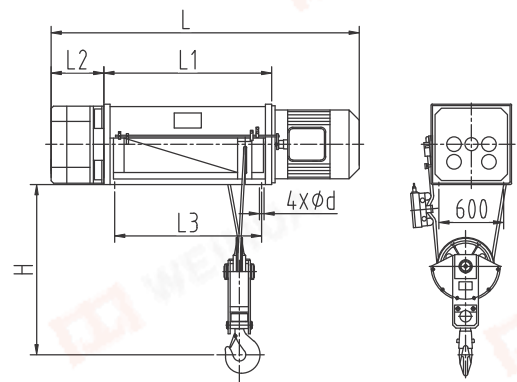


HB 固定式 16吨 (H=12-48米)

Model HB Stationary 16t (H=12-48m)

HB型防爆钢丝绳电动葫芦

HB Model Explosion Proof Wire Rope Electric Hoist

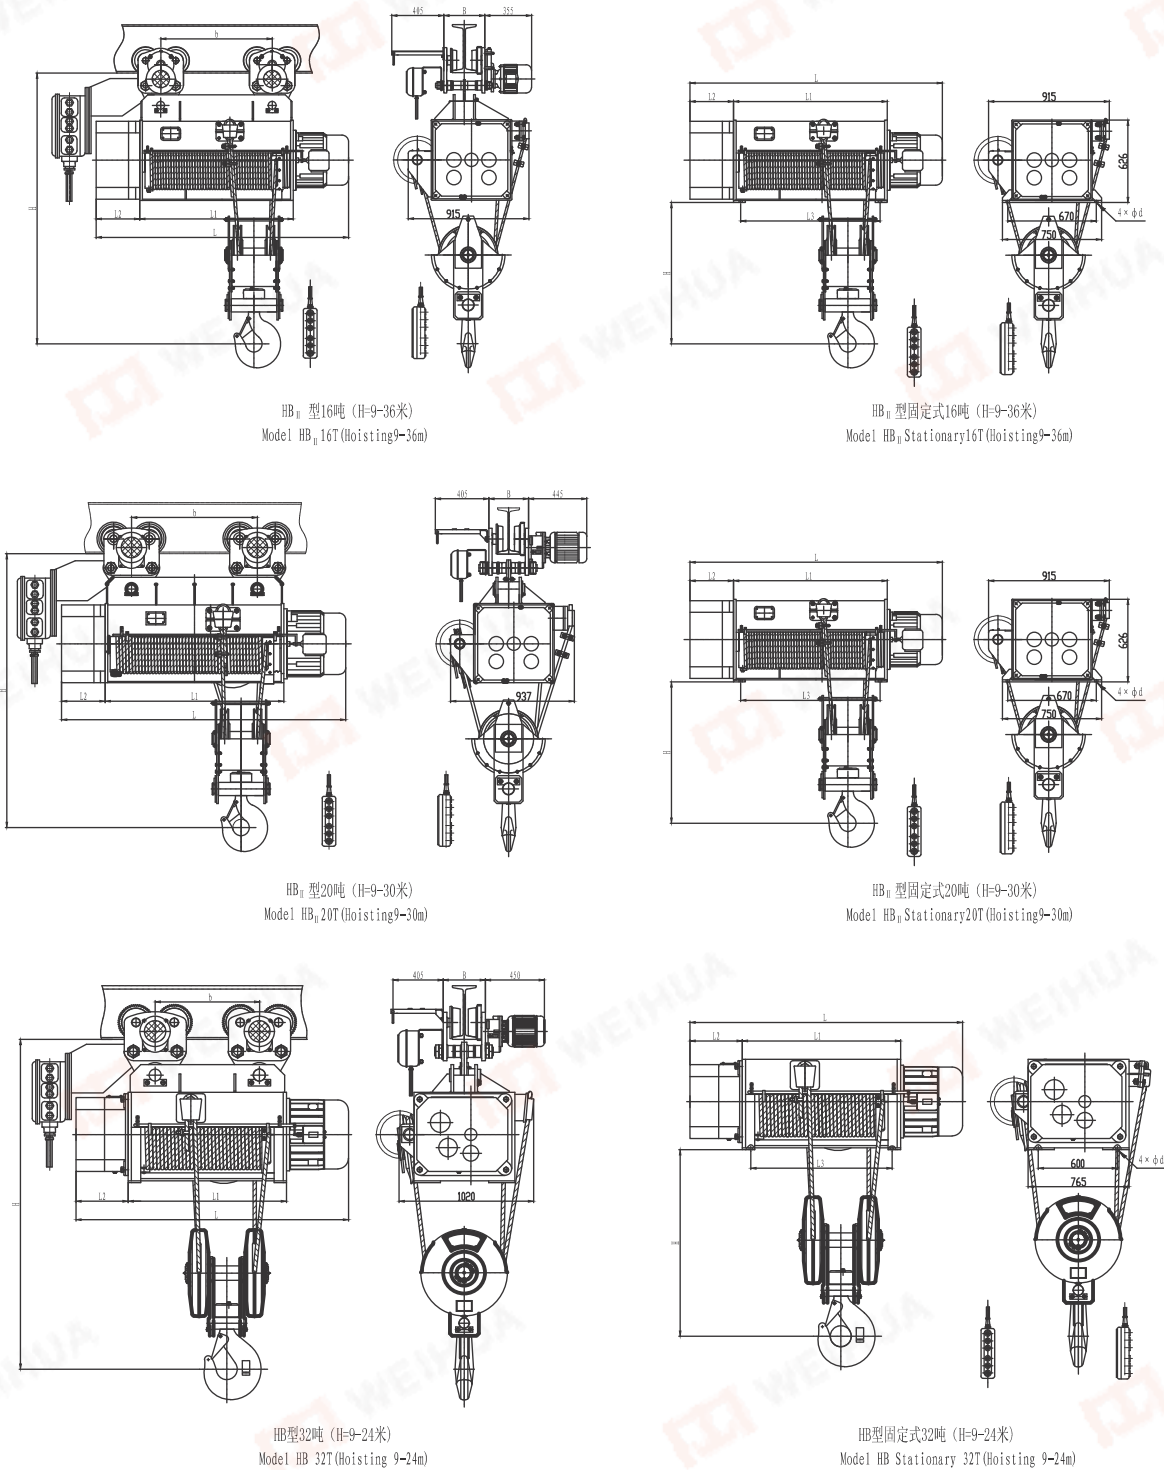

HB型防爆钢丝绳电动葫芦

HB Model Explosion Proof Wire Rope Electric Hoist

型号		Type		HB(Ex)HBT4, ExdIIC(T4)																																			
起重量	Capacity(t)	0.5				1				2				3				5				10				16													
起升高度	Hoisting(m)	6	9	12	6	9	12	18	24	30	6	9	12	18	24	30	6	9	12	18	24	30	6	9	12	18	24	30	9	12	18	24	30						
起升速度	Hoisting speed (m/min)	8(0.8/8)																								7 (0.7/7)				3.5 (0.35/3.5)									
运行速度		20																																					
绳径		7.4				11				13				15				18																					
钢丝绳 结构		6x37+FC																																					
运行轨道		16-28b				20a-28b				25a-45a				32b-45a				32b-63c																					
最小曲率半径		1.5	2	3	4	2	2.5	3	4	2	2.5	3	4	2.5	3	4	2.5	3	4	4.5	6	3.5	4	6	7.5	9	3.5	4	6	8	11								
起升电机		型号		BZD.21-4				BZD.31-4				BZD.32-4				BZD.41-4				BZD.51-4				BZD.51-4															
		功率		BZDS.0.4/0.8				BZDS.0.4/1.5				BZDS.0.4/3.0				BZDS.0.4/4.5				BZDS.0.8/7.5				BZDS.2.2/13															
运行电机		功率		0.8(0.4/0.8)				1.5(0.4/1.5)				3.0(0.4/3.0)				4.5(0.4/4.5)				7.5(0.8/7.5)				13(2.2/13)															
		转速		1380				1380				1380				1380				1380				13(2.2/13)															
结合次数		电流		2.4(0.72/2.4)				4.3(0.72/4.3)				7.6(1.25/7.6)				11(1.25/11)				18(2.4/18)				30(5.2/30)															
		功率		0.2				BZDY.11-4				BZDY.12-4				0.4				0.8				BZDY.21-4															
工作制度		旋转速度		1380				1380				1380				1380				1380				1380															
		电流		0.72				1.25				1.25				2.4				2.4				2.4x2															
电 源		Power source		三相交流 Three-phase AC 380V 50Hz																																			
基 本 尺 寸		L	616	688	760	758	856	954	1150	1346	1542	820	920	1020	1220	1420	1620	932	1035	1138	1344	1550	1756	1047	1157	1257	1467	1677	1887	1602	1783	2145	2507	2869	1872	2092	2532	2952	3387
		L1	274	346	418	345	443	541	737	933	1129	352	452	552	752	952	1152	380	483	586	792	998	1204	415	525	625	835	1045	1255	875	1056	1418	1780	2142	1136	1356	1796	2176	2616
		L2	132	159	188	159	196	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240
		L3	318	390	462	401	499	597	793	989	1185	418	518	618	818	1018	1218	448	551	654	860	1066	1272	485	606	695	905	1115	1325	949	1130	1492	1854	2216	1210	1430	1870	2250	2690
自 重		L4	190	240	290	240	290	340	390	440	490	540	590	640	690	740	790	840	890	940	990	1040	1090	1140	1190	1240	1290	1340	1390	1440	1490	1540	1590	1640	1690	1740	1790	1840	
		B	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884	884
		H	650	667	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677	677
		d	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17
电 源		b	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185	185
		CD1	171	175	180	187	195	222	238	254	270	271	282	335	359	382	393	331	347	404	440	470	501	517	575	677	726	766	806	1168	1218	1329	1421	1531	1250	1303	1406	1583	1683
		MD1	238	242	247	264	274	299	315	331	347	356	367	420	444	461	488	411	427	484	520	550	581	608	632	754	803	843	883	1224	1274	1385	1486	1587	1340	1393	1496	1673	1773
		CD1固	139	144	149	155	162	170	185	209	215	216	229	236	259	279	299	272	286	300	334	362	390	457	480	495	536	573	609	915	961	1063	1155	1247	970	1023	1126	1303	1403
电 源		MD1固	206	211	216	232	240	247	262	277	292	301	311	321	344	364	384	352	366	380	414	442	470	530	557	572	613	649	686	971	1017	1119	1211	1303	1069	1117	1210	1393	1493

防爆梁式起重机

Explosion Proof Beam Crane

产品概述：


- 1、防爆梁式起重机包括LXB防爆电动单梁悬挂起重机、LB防爆电动单梁起重机及LHB防爆电动葫芦桥式起重机。
- 2、防标分别为Exd II BT4, Exd II CT4及DIPA21TA, T4.
- 3、工作级别为A3, 工作环境为-20℃~40℃.

Product Introduction:

- 1.Exploration-proof girder crane include LXB Explosion-proof single girder suspension crane 、LB Explosion-proof single girder crane and LHB type Explosion-proof electric hoist double girder crane.
- 2.For each of the Explosion-proof sign is Exd II BT4、Exd II CT4、DIPA21TA、T4.
- 3.Working class M3, Work environment temperature-20~40℃.

LXB型防爆电动单梁悬挂起重机

LXB Type Explosion Proof Electric Single Girder Suspension Crane

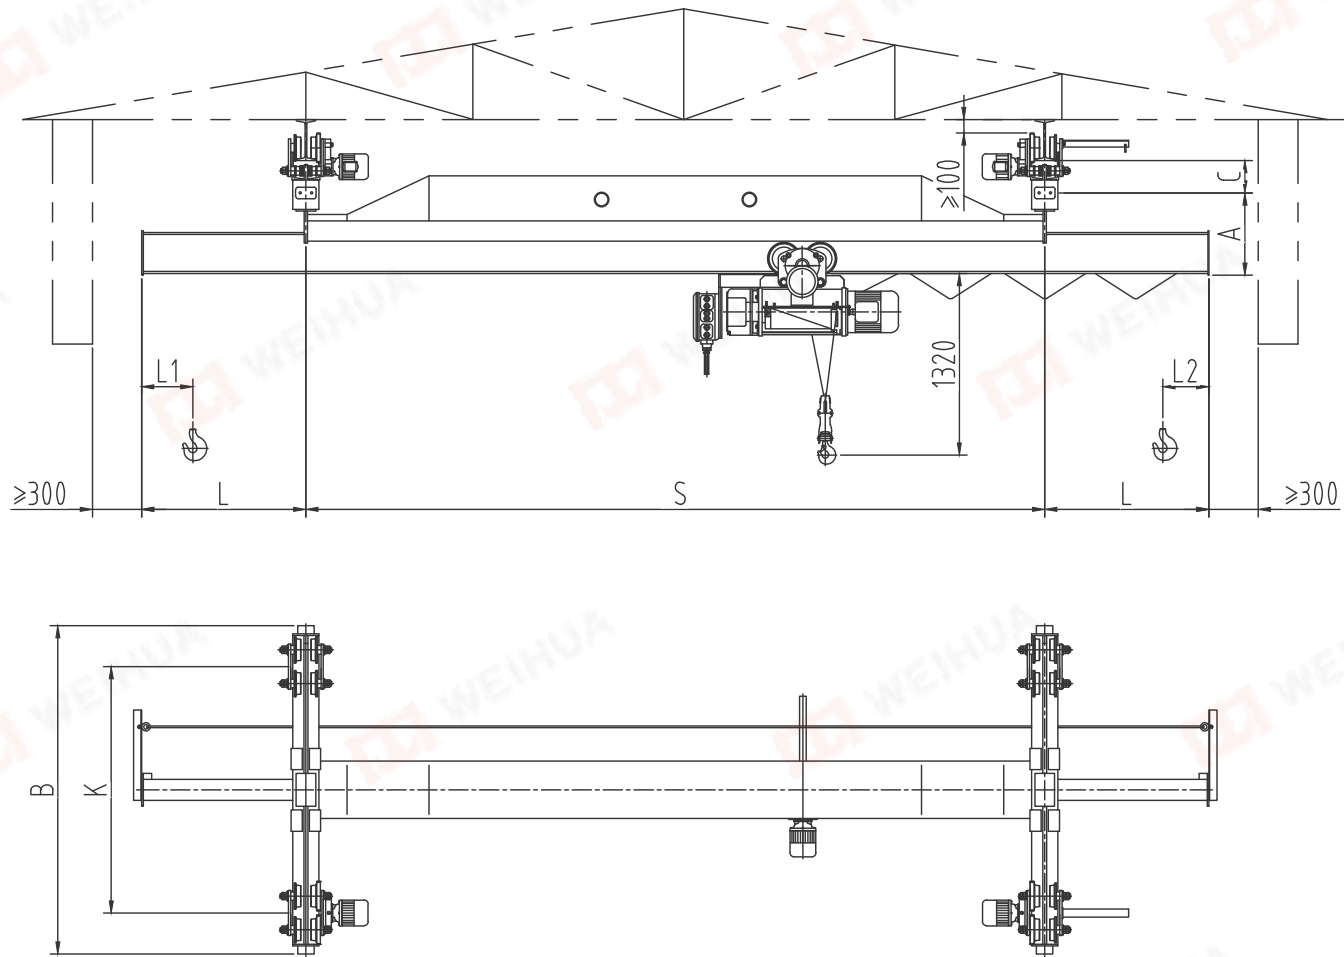

起重量 Cap				0.5~10	
防爆标志 Explosion proof grade				ExdIIBT4/ExdIICT4	
工作级别 Working class				A3	
电源 Power source				3- Phase A.c. 380V 50HZ	
起 重 机 运 行 机 构 Crane traveling mechanism	运行速度 traveling speed			20 m/min	
	电 动 机 motor	0.5~3t	3~22.5m	BZDY12-4/0.4KWx2	
		5t	3~16m		
		5t	16~22.5m	BZDY21-4/0.8KWx2	
		10t	3~22.5m		

LXB型防爆电动单梁悬挂起重机

LXB Type Explosion Proof Electric Single Girder Suspension Crane

起重重量 Rated load	0.5t															
	跨度 (m) Span	12.5	12	11.5	11	10.5	10	9.5	9	8.5	8	7.5	7	6.5	6	5.5
	起重重量 (kg) Total weight	1876	1892	1792	1752	1708	1668	1624	1583	1540	1439	1396	1355	1312	1271	1228
	最大轮压 (kN) Max wheel load	7.97	7.86	7.77	7.68	7.58	7.48	7.38	7.29	7.19	6.95	6.86	6.78	6.69	6.61	6.52
起重重量 Rated load	1t															
	跨度 (m) Span	12.5	12	11.5	11	10.5	10	9.5	9	8.5	8	7.5	7	6.5	6	5.5
	起重重量 (kg) Total weight	2976	2929	2885	2839	2793	2745	2504	2460	2420	2376	2336	2292	2252	2208	2168
	最大轮压 (kN) Max wheel load	10.66	10.54	10.43	10.31	10.21	10.09	9.49	9.38	9.28	9.18	9.08	8.97	8.87	8.77	8.67
起重重量 Rated load	2t															
	跨度 (m) Span	12.5	12	11.5	11	10.5	10	9.5	9	8.5	8	7.5	7	6.5	6	5.5
	起重重量 (kg) Total weight	4976	4929	4885	4839	4793	4745	4504	4460	4420	4376	4336	4292	4252	4208	4168
	最大轮压 (kN) Max wheel load	20.66	20.54	20.43	20.31	20.21	20.09	19.49	19.38	19.28	19.18	19.08	18.97	18.87	18.77	18.67
起重重量 Rated load	3t															
	跨度 (m) Span	12.5	12	11.5	11	10.5	10	9.5	9	8.5	8	7.5	7	6.5	6	5.5
	起重重量 (kg) Total weight	5976	5929	5885	5839	5793	5745	5504	5460	5420	5376	5336	5292	5252	5208	5168
	最大轮压 (kN) Max wheel load	30.66	30.54	30.43	30.31	30.21	30.09	29.49	29.38	29.28	29.18	29.08	28.97	28.87	28.77	28.67
起重重量 Rated load	5t															
	跨度 (m) Span	12.5	12	11.5	11	10.5	10	9.5	9	8.5	8	7.5	7	6.5	6	5.5
	起重重量 (kg) Total weight	9976	9929	9885	9839	9793	9745	9504	9460	9420	9376	9336	9292	9252	9208	9168
	最大轮压 (kN) Max wheel load	50.66	50.54	50.43	50.31	50.21	50.09	49.49	49.38	49.28	49.18	49.08	48.97	48.87	48.77	48.67
起重重量 Rated load	10t															
	跨度 (m) Span	12.5	12	11.5	11	10.5	10	9.5	9	8.5	8	7.5	7	6.5	6	5.5
	起重重量 (kg) Total weight	19976	19929	19885	19839	19793	19745	19504	19460	19420	19376	19336	19292	19252	19208	19168
	最大轮压 (kN) Max wheel load	100.66	100.54	100.43	100.31	100.21	100.09	99.49	99.38	99.28	99.18	99.08	98.97	98.87	98.77	98.67
起重重量 Rated load	20t															
	跨度 (m) Span	12.5	12	11.5	11	10.5	10	9.5	9	8.5	8	7.5	7	6.5	6	5.5
	起重重量 (kg) Total weight	39976	39929	39885	39839	39793	39745	39504	39460	39420	39376	39336	39292	39252	39208	39168
	最大轮压 (kN) Max wheel load	200.66	200.54	200.43	200.31	200.21	200.09	199.49	199.38	199.28	199.18	199.08	198.97	198.87	198.77	198.67
起重重量 Rated load	30t															
	跨度 (m) Span	12.5	12	11.5	11	10.5	10	9.5	9	8.5	8	7.5	7	6.5	6	5.5
	起重重量 (kg) Total weight	59976	59929	59885	59839	59793	59745	59504	59460	59420	59376	59336	59292	59252	59208	59168
	最大轮压 (kN) Max wheel load	300.66	300.54	300.43	300.31	300.21	300.09	299.49	299.38	299.28	299.18	299.08	298.97	298.87	298.77	298.67
起重重量 Rated load	50t															
	跨度 (m) Span	12.5	12	11.5	11	10.5	10	9.5	9	8.5	8	7.5	7	6.5	6	5.5
	起重重量 (kg) Total weight	99976	99929	99885	99839	99793	99745	99504	99460	99420	99376	99336	99292	99252	99208	99168
	最大轮压 (kN) Max wheel load	500.66	500.54	500.43	500.31	500.21	500.09	499.49	499.38	499.28	499.18	499.08	498.97	498.87	498.77	498.67
起重重量 Rated load	100t															
	跨度 (m) Span	12.5	12	11.5	11	10.5	10	9.5	9	8.5	8	7.5	7	6.5	6	5.5
	起重重量 (kg) Total weight	199976	199929	199885	199839	199793	199745	199504	199460	199420	199376	199336	199292	199252	199208	199168
	最大轮压 (kN) Max wheel load	1000.66	1000.54	1000.43	1000.31	1000.21	1000.09	999.49	999.38	999.28	999.18	999.08	998.97	998.87	998.77	998.67

LXB型防爆电动单梁悬挂起重机

LXB Type Explosion Proof Electric Single Girder Suspension Crane

1t																					
起重量 Rated load	跨度 (m) Span	3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12	12.5
起重量总重 (kg) Total weight	1034	1075	1118	1159	1202	1243	1286	1327	1370	1411	1454	1555	1598	1639	1683	1723	1767	1807	1847	1891	
最大轮压(kN) Max wheel load	9.57	9.52	9.52	9.53	9.57	9.61	9.67	9.74	9.81	9.88	9.96	10.19	10.28	10.36	10.46	10.54	10.64	10.73	10.82	10.91	
最小轮压(kN) Min wheel load	2.58	2.69	2.89	2.90	3.01	3.11	3.22	3.32	3.43	3.53	3.64	3.89	4.00	4.10	4.21	4.31	4.42	4.52	4.62	4.73	
h(mm)	起升高度不大于9米时，h=847mm；起升高度大于9米时h=947mm； When lifting height is less than 9m, h=847mm；When lifting height is more than 9m, h=947mm；																				
A(mm)	435																				
C(mm)	~208																				
L1(mm)	310																				
L2(mm)	130																				
B(mm)	1500								2000								2500				
K(mm)	1000								1500								2000				
L(mm)	750								1000												
1t																					
起重量 Rated load	跨度 (m) Span	13	13.5	14	14.5	15	15.5	16	16.5	17	17.5	18	18.5	19	19.5	20	20.5	21	21.5	22	22.5
起重量总重 (kg) Total weight	1931	1975	2015	2217	2261	2309	2353	2401	2445	2483	2633	2680	2732	2779	2831	3111	3167	3219	3275	3327	3383
最大轮压(kN) Max wheel load	11.01	11.10	11.20	11.70	11.80	11.91	12.01	12.01	12.13	12.23	12.70	12.81	12.93	13.05	13.17	13.87	14.01	14.13	14.27	14.40	14.53
最小轮压(kN) Min wheel load	4.83	4.94	5.04	5.54	5.65	5.77	5.88	6.00	6.11	6.11	6.58	6.70	6.83	6.95	7.08	7.78	7.92	8.05	8.19	8.32	8.46
h(mm)	起升高度不大于9米时，h=847mm；起升高度大于9米时h=947mm； When lifting height is less than 9m, h=847mm；When lifting height is more than 9m, h=947mm；																				
A(mm)	435	455								480								535			
C(mm)	~208																				
L1(mm)	310																				
L2(mm)	130																				
B(mm)	2500								3000								3500				
K(mm)	2000								2500								3000				
L(mm)	1000																				

LXB型防爆电动单梁悬挂起重机

LXB Type Explosion Proof Electric Single Girder Suspension Crane

起重量 Rated load		2t																					
跨度 (m) Span		3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12	12.5		
起吊机总重 (kg) Total weight																							
最大轮压(kN) Max wheel load																							
最小轮压(kN) Min wheel load																							
h (mm)		起升高度不大于9米时，h=1020mm；起升高度大于9米时h=1130mm； When lifting height is less than 9m, h=1020mm, When lifting height is more than 9m, h=1130mm,																		480			
A (mm)		435																		480			
C (mm)		~208																					
L1 (mm)		290																					
L2 (mm)		170																					
B (mm)		1500																		2000		2500	
K (mm)		1000																		1500		2000	
L (mm)		750																		1000			
起重量 Rated load		2t																					
跨度 (m) Span		13	13.5	14	14.5	15	15.5	16	16.5	17	17.5	18	18.5	19	19.5	20	20.5	21	21.5	22	22.5		
起吊机总重 (kg) Total weight																							
最大轮压(kN) Max wheel load																							
最小轮压(kN) Min wheel load																							
h (mm)		起升高度不大于9米时，h=1020mm；起升高度大于9米时h=1130mm； When lifting height is less than 9m, h=1020mm, When lifting height is more than 9m, h=1130mm,																		580			
A (mm)		480																		555		580	
C (mm)		~208																					
L1 (mm)		290																					
L2 (mm)		170																					
B (mm)		2500																		3000		3500	
K (mm)		2000																		2500		3000	
L (mm)		1000																					

LXB型防爆电动单梁悬挂起重机

LXB Type Explosion Proof Electric Single Girder Suspension Crane

LXB型防爆电动单梁悬挂起重机

LXB Type Explosion Proof Electric Single Girder Suspension Crane

起重量 Rated load		3t																			
跨度 (m) Span		3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12	12.5
起重量总重 (kg) Total weight		1245	1292	1342	1389	1439	1486	1536	1583	1633	1680	1730	1840	1890	1937	1987	2034	2084	2271	2323	2379
最大轮压(kN) Max wheel load		23.54	23.22	23.02	22.89	22.81	22.76	22.75	22.75	22.78	22.81	22.86	23.07	23.90	23.20	23.28	23.35	23.44	23.87	23.96	24.07
最小轮压(kN) Min wheel load		3.11	3.23	3.35	3.47	3.60	3.71	3.84	3.96	4.08	4.20	4.33	4.60	4.72	4.84	23.28	23.35	23.44	5.68	5.81	5.95
h(mm)	起升高度不大于9米时，h=1134mm；起升高度大于9米时h=1240mm； When lifting height is less than 9m, h=1134mm；When lifting height is more than 9m, h=1240mm；																				
A(mm)	455										535										
C(mm)	~208																				
L1(mm)	290																				
L2(mm)	170																				
B(mm)	1500										2000										2500
K(mm)	1000										1500										2000
L4(mm)	750										1000										
起重量 Rated load	3t																				
跨度 (m) Span		13	13.5	14	14.5	15	15.5	16	16.5	17	17.5	18	18.5	19	19.5	20	20.5	21	21.5	22	22.5
起重量总重 (kg) Total weight		2431	2487	2539	2784	2840	2902	2958	3019	3075	3300	3361	3426	3487	3552	3704	3766	3835	3897	3967	4028
最大轮压(kN) Max wheel load		24.18	24.29	24.40	24.99	25.11	25.24	25.36	25.50	25.62	26.17	26.31	26.46	26.59	26.75	27.11	27.26	27.42	27.56	27.73	27.87
最小轮压(kN) Min wheel load		6.08	6.22	6.35	6.96	7.10	7.25	7.40	7.55	7.69	8.25	8.40	8.57	8.72	8.88	9.26	9.41	9.59	9.74	9.92	10.07
h(mm)	起升高度不大于9米时，h=1134mm；起升高度大于9米时h=1240mm； When lifting height is less than 9m, h=1134mm；When lifting height is more than 9m, h=1240mm；																				
A(mm)	535										590										590
C(mm)	~208																				
L1(mm)	290																				
L2(mm)	170																				
B(mm)	2500										3000										3500
K(mm)	2000										2500										3000
L4(mm)	1000																				

起重量 Rated load		5t																					
跨度 (m) Span		3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12	12.5		
起重量总重 (kg) Total weight		1541	1589	1661	1719	1780	1838	1900	1958	2019	2077	2139	2271	2333	2391	2452	2510	2572	2617	2683	2966		
最大轮压(kN) Max wheel load		37.91	37.33	38.95	38.67	38.49	38.36	38.28	38.23	38.22	38.22	38.25	37.18	37.20	37.22	37.26	37.30	37.37	37.90	37.98	38.20		
最小轮压(kN) Min wheel load		3.85	4.00	4.15	4.30	4.45	4.60	4.75	4.89	5.05	5.19	5.35	5.68	5.83	5.98	6.13	6.28	6.43	7.04	7.21	7.49		
h(mm)		起升高度不大于9米时，h=1320mm；起升高度大于9米时h=1383mm； When lifting height is less than 9m, h=1320mm；When lifting height is more than 9m, h=1383mm；																					
A(mm)		485										535											
C(mm)		~208																					
L1(mm)		360																					
L2(mm)		150																					
B(mm)		1500										2000										2500	
K(mm)		1000										1500										2000	
L(mm)		750										1000											
起重量 Rated load		5t																					
跨度 (m) Span		13	13.5	14	14.5	15	15.5	16	16.5	17	17.5	18	18.5	19	19.5	20	20.5	21	21.5	22	22.5		
起重量总重 (kg) Total weight		3062	3134	3201	3337	3403	3475	3551	3578	3647	3697	3749	3878	3947	3971	3971	3971	3971	3971	3971	3971		
最大轮压(kN) Max wheel load		38.30	38.42	38.53	38.31	38.43	38.57	38.69	38.99	40.13	41.29	41.49	41.66	41.85	42.03	42.71	42.89	43.10	43.29	43.50	43.69		
最小轮压(kN) Min wheel load		7.65	7.84	8.00	8.84	9.04	9.19	9.35	9.70	9.87	11.07	11.30	11.50	11.73	11.93	12.64	12.85	13.08	13.29	13.53	14.73		
h(mm)		起升高度不大于9米时，h=1320mm；起升高度大于9米时h=1383mm； When lifting height is less than 9m, h=1320mm；When lifting height is more than 9m, h=1383mm；																					
A(mm)		590										610										640	
C(mm)		~208																					
L1(mm)		360																					
L2(mm)		150																					
B(mm)		2500										3000										3500	
K(mm)		2000										2500										3000	
L(mm)		1000																					

LXB型防爆电动单梁悬挂起重机


LXB Type Explosion Proof Electric Single Girder Suspension Crane

LB型防爆电动单梁起重机

LB Type Explosion Proof Electric Single Girder Crane

10t																						
起重量 Rated load	跨度 (m) Span	3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12	12.5	
起重量和总重 (kg) Total weight		2314	2372	2434	2492	2554	2612	2673	2731	2789	2851	2913	3189	3259	3326	3405	3482	3551	3898	3989	4170	
最大轮压(kN) Max wheel load		68.94	64.08	64.24	64.38	64.54	64.68	64.84	64.98	64.14	65.28	65.44	69.85	69.82	69.84	69.85	69.90	69.95	70.54	70.66	71.01	
最小轮压(kN) Min wheel load		5.79	5.93	6.08	6.23	6.38	6.53	6.68	6.83	6.98	7.13	7.28	8.12	8.29	8.45	8.66	8.86	9.03	9.75	9.97	10.43	
1670																						
h(mm)	555																	590			650	
A(mm)	555																	590			650	
C(mm)	~240																					
L1(mm)	500																					
L2(mm)	500																					
B(mm)	1500																	2000			2500	
K(mm)	1000																	1500			2000	
L(mm)	750																	1000				
10t																						
起重量 Rated load	跨度 (m) Span	13	13.5	14	14.5	15	15.5	16	16.5	17	17.5	18	18.5	19	19.5	20	20.5	21	21.5	22	22.5	
起重量和总重 (kg) Total weight		4292	4342	4433	4581	4675	4758	4852	5161	5255	5753	5856	5945	6048	6136	6875	7080	7200	7306	7427	7582	
最大轮压(kN) Max wheel load		71.14	71.26	71.40	71.70	71.87	72.01	72.18	72.90	73.08	74.27	74.48	74.66	74.87	75.05	77.10	77.33	77.60	77.83	78.10	78.33	
最小轮压(kN) Min wheel load		10.65	10.86	11.08	11.45	11.69	11.89	12.13	12.90	13.14	14.38	14.64	14.86	15.12	15.34	17.45	17.70	18.00	18.2	18.57	18.83	
1670																						
h(mm)	650				660												710			715		
A(mm)	650				~240															~335		
C(mm)																						
L1(mm)					500																	
L2(mm)					500																	
B(mm)	2500								3000								3500					
K(mm)	2000								2500								3000					
L(mm)									1000													

备注:L1, L2的尺寸均为h=6m的葫芦的左右极限尺寸,其他起升高度的左右极限尺寸请咨询。
Remark:L1, L2 is left limit dimension and right limit dimension of electric hoist with lifting height 6m and consult technicians for left limit dimension and right limit dimension of other lifting height.

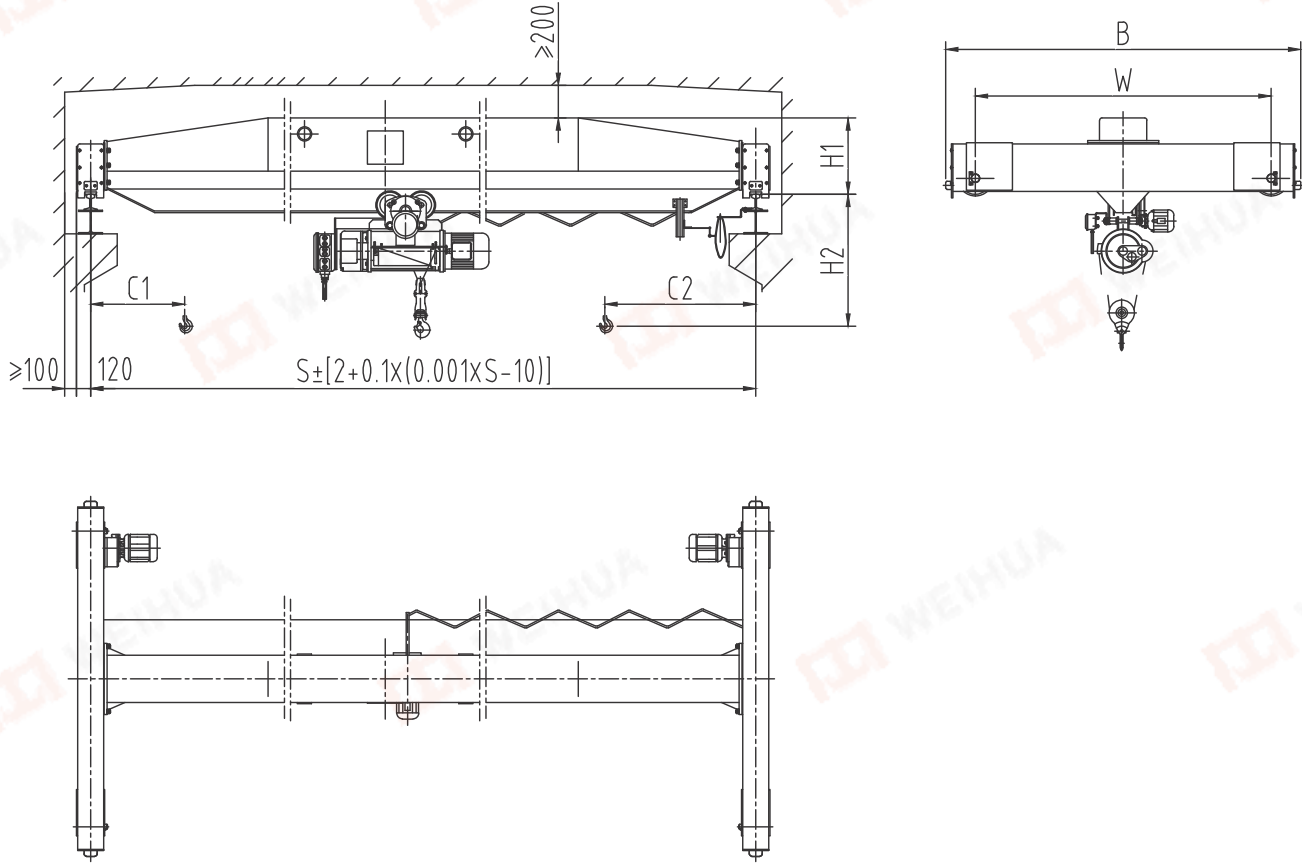

起重量 Cap		1~20
防爆标志 Explosion proof grade		ExdIIBT4/ExdIICT4
工作级别 Working system		A3
电源 Power source		3- Phase A.c. 380V 50HZ
起重机运行机构 Crane traveling mechanism	运行速度 traveling speed	20 m/min
	功率 Power	0.8KWx2 1.5KWx2 2.2KWx2
车轮直径 wheel diameter		ø250,ø270,ø400
荐用钢轨 Steel track		P18,P24,P30,P38,P43

LB型防爆电动单梁起重机

LB Type Explosion Proof Electric Single Girder Crane

起重量 Lifting capacity	跨度 Span	起重机总重 Crane total weight	最大轮压 Max.wheel load	最小轮压 Min.wheel load	基本尺寸 (mm) Basic dimensions											
t	S(m)	(地面操作) G (t) Ground controlling	Rmax (kN)	Rmin (kN)	踏面至主梁顶 H1(mm) Wheel tread approach to top	踏面至吊钩中心 H2(mm) Wheel tread approach to center of hook	端梁轮距 W(mm) End carriage wheelbase	端梁总长 B(mm) Total length of end carriage	吊钩左极限 C1(mm) Hook approach to limit position on the left	吊钩右极限 C2(mm) Hook approach to limit position on the right						
1	7.5	1.59	8.7	3.7	490	910	1500	2000	796	1274						
	8	1.64	8.9	3.8												
	8.5	1.68	9	3.9												
	9	1.73	9.2	4												
	9.5	1.78	9.3	4.2												
	10	1.83	9.5	4.3												
	10.5	1.87	9.6	4.4												
	11	1.92	9.8	4.5												
	11.5	1.96	9.9	4.6	490	910	2000	2500	796	1274						
	12	2.01	10	4.7												
	12.5	2.06	10.2	4.8												
	13	2.11	10.3	5												
	13.5	2.15	10.4	5.1												
	14	2.2	10.5	5.2												
	14.5	2.39	11	5.7												
	15	2.44	11.2	5.8							490	955	2000	2500	796	1274
	15.5	2.49	11.3	5.9	2500	3000										
	16	2.54	11.4	6												
	16.5	2.59	11.6	6.2												
	17	2.64	11.7	6.3												
	17.5	2.85	12.2	6.8												
	18	2.9	12.4	6.9				530	970	2500			3000	796		
	18.5	2.95	12.5	7.1												
	19	3.01	12.6	7.2												
	19.5	3.06	12.8	7.3												
	20	3.26	13.3	7.8	580	970	3000				3500	796			1274	
	20.5	3.32	13.4	8												
	21	3.37	13.6	8.1												
	21.5	3.43	13.7	8.3												
	22	3.49	13.9	8.4												
	22.5	3.55	14	8.5												
	23	4.26	15.8	10.3				660	990	3500			4000	796		1274
	23.5	4.33	16	10.5												
	24	4.4	16.2	10.7												
	24.5	4.47	16.4	10.8												
	25	4.54	16.5	11												
	25.5	4.61	16.7	11.2												
	26	5.25	18.3	12.8	725	1005	4000				4500	796			1274	
	26.5	5.33	18.5	13												
	27	5.41	18.7	13.2												
	27.5	5.5	18.9	13.4												
	28	5.57	19.1	13.6												
	28.5	5.66	19.4	13.8												

LB型防爆电动单梁起重机

LB Type Explosion Proof Electric Single Girder Crane

起重量 Lifting capacity	跨度 Span	起重机总重 Crane total weight	最大轮压 Max.wheel load	最小轮压 Min.wheel load	基本尺寸 (mm) Basic dimensions											
t	S(m)	(地面操作) G (t) Ground controlling	Rmax (kN)	Rmin (kN)	踏面至主梁顶 H1(mm) Wheel tread approach to top	踏面至吊钩中心 H2(mm) Wheel tread approach to center of hook	端梁轮距 W(mm) End carriage wheelbase	端梁总长 B(mm) Total length of end carriage	吊钩左极限 C1(mm) Hook approach to limit position on the left	吊钩右极限 C2(mm) Hook approach to limit position on the right						
2	7.5	1.68	13.6	3.7	490	1080	1500	2000	796	1274						
	8	1.72	13.8	3.9												
	8.5	1.77	14	4												
	9	1.82	14.1	4.1												
	9.5	1.87	14.3	4.2												
	10	1.91	14.5	4.3												
	10.5	1.96	14.6	4.4												
	11	2.01	14.8	4.5												
	11.5	2.14	15.2	4.9	490	1125	2000	2500	796	1274						
	12	2.19	15.3	5												
	12.5	2.24	15.5	5.1												
	13	2.29	15.6	5.2												
	13.5	2.34	15.8	5.3												
	14	2.39	15.9	5.5												
	14.5	2.67	16.7	6.2												
	15	2.73	16.8	6.3							580	1140	2000	2500	796	1274
	15.5	2.79	17	6.5	2500	3000										
	16	2.84	17.1	6.6												
	16.5	2.9	17.3	6.7												
	17	2.96	17.5	6.9												
	17.5	3.48	18.8	8.2	660	1160	2500	3000	796	1274						
	18	3.55	19	8.4												
	18.5	3.62	19.2	8.5												
	19	3.69	19.3	8.7												
	19.5	3.76	19.5	8.9												
	20	4.03	20.2	9.5							725	1175	3000	3500	796	1274
	20.5	4.11	20.4	9.7												
	21	4.18	20.6	9.9												
	21.5	4.25	20.8	10.1												
	22	4.32	21	10.3												
	22.5	4.4	21.2	10.5												
	23	5.23	23.3	12.6	835	1165	3500	4000	796	1274						
	23.5	5.33	23.5	12.8												
	24	5.41	23.7	13												
	24.5	5.5	24	13.2												
	25	5.58	24.2	13.4												
	25.5	5.68	24.4	13.7												
	26	6.35	26.1	15.3							880	1200	4000	4500	796	1274
	26.5	6.45	26.4	15.6												
	27	6.55	26.6	15.8												
	27.5	6.65	26.9	16.1												
	28	6.74	27.1	16.3												
	28.5	6.85	27.4	16.6												

LB型防爆电动单梁起重机

LB Type Explosion Proof Electric Single Girder Crane

起重量 Lifting capacity	跨度 Span	起重机总重 Crane total weight	最大轮压 Max.wheel load	最小轮压 Min.wheel load	基本尺寸 (mm) Basic dimensions						
t	S(m)	(地面操作) G (t) Ground controlling	Rmax (kN)	Rmin (kN)	踏面至主梁顶 H1(mm) Wheel tread approach to top	踏面至吊钩中 心 H2(mm) Wheel tread approach to center of hook	端梁轮距 W(mm) End carriage wheelbase	端梁总长 B(mm) Total length of end carriage	吊钩左极限 C1(mm) Hook approach to limit position on the left	吊钩右极限 C2(mm) Hook approach to limit position on the right	
3	7.5	1.86	18.6	4.1	530	1270	1500	2000	819	1291	
	8	1.91	18.9	4.2							
	8.5	1.97	19.1	4.3							
	9	2.03	19.3	4.5							
	9.5	2.08	19.5	4.6							
	10	2.13	19.7	4.7							
	10.5	2.19	19.9	4.9							
	11	2.24	20.1	5							
	11.5	2.35	20.5	5.3	580	1270	2000	2500	819	1291	
	12	2.41	20.7	5.4							
	12.5	2.47	20.8	5.5							
	13	2.52	21	5.7							
	13.5	2.58	21.2	5.8							
	14	2.64	21.4	5.9							
	14.5	3.12	22.6	7.2							
	15	3.19	22.8	7.3	660	1290	2000	2500	819	1291	
	15.5	3.26	23	7.5			2500	3000			
	16	3.33	23.2	7.7							
	16.5	3.4	23.4	7.9							
	17	3.47	23.6	8							
	17.5	3.68	24.2	8.5							
	18	3.75	24.4	8.7							725
	18.5	3.82	24.6	8.9							
	19	3.89	24.8	9.1							
	19.5	3.97	25	9.3							
	20	4.73	26.9	11.2	835	1295	3000	3500	819	1291	
	20.5	4.82	27.1	11.4							
	21	4.9	27.4	11.6							
	21.5	5	27.6	11.8							
	22	5.08	27.8	12							
	22.5	5.17	28.1	12.2							
	23	5.49	28.9	13							
	23.5	5.58	29.1	13.3	880	1330	3500	4000	819	1291	
	24	5.67	29.4	13.5							
	24.5	5.76	29.6	13.7							
	25	5.85	29.8	13.9							
	25.5	5.95	30.1	14.2							
	26	7.52	34	18.1							
	26.5	7.64	34.3	18.4	940	1370	4000	4500	819	1291	
	27	7.74	34.6	18.7							
	27.5	7.87	34.9	19							
	28	7.97	35.2	19.2							
	28.5	8.1	35.5	19.5							

LB型防爆电动单梁起重机

LB Type Explosion Proof Electric Single Girder Crane

起重量 Lifting capacity	跨度 Span	起重机总重 Crane total weight	最大轮压 Max.wheel load	最小轮压 Min.wheel load	基本尺寸 (mm) Basic dimensions						
t	S(m)	(地面操作) G (t) Ground controlling	Rmax (kN)	Rmin (kN)	踏面至主梁顶 H1(mm) Wheel tread approach to top	踏面至吊钩中 心 H2(mm) Wheel tread approach to center of hook	端梁轮距 W(mm) End carriage wheelbase	端梁总长 B(mm) Total length of end carriage	吊钩左极限 C1(mm) Hook approach to limit position on the left	吊钩右极限 C2(mm) Hook approach to limit position on the right	
5	7.5	2.22	28.7	4.6	580	1460	1500	2000	842	1310	
	8	2.28	29.1	4.7							
	8.5	2.35	29.4	4.9							
	9	2.41	29.7	5							
	9.5	2.48	30	5.2							
	10	2.54	30.3	5.3							
	10.5	2.61	30.6	5.5							
	11	2.67	30.8	5.6							
	11.5	2.86	31.4	6.1	660	1460	2000	2500	842	1310	
	12	2.93	31.6	6.3							
	12.5	3	31.9	6.4							
	13	3.07	32.1	6.6							
	13.5	3.14	32.4	6.8							
	14	3.21	32.6	6.9							
	14.5	3.43	33.2	7.5							
	15	3.5	33.5	7.7							725
	15.5	3.58	33.7	7.9	2500	3000					
	16	3.65	33.9	8							
	16.5	3.72	34.2	8.2							
	17	3.79	34.4	8.4							
	17.5	4.44	36	10							
	18	4.52	36.3	10.2	835	1465	2500	3000	842	1310	
	18.5	4.61	36.5	10.4							
	19	4.69	36.8	10.6							
	19.5	4.79	37	10.8							
	20	5.09	37.8	11.6							
	20.5	5.19	38.1	11.8	880	1500	3000	3500	842	1310	
	21	5.27	38.3	12							
	21.5	5.37	38.6	12.3							
	22	5.45	38.8	12.5							
	22.5	5.55	39.1	12.7							
	23	6.27	40.9	14.6	940	1540	3500	4000	842	1310	
	23.5	6.39	41.2	14.8							
	24	6.48	41.5	15.1							
	24.5	6.59	41.8	15.3							
	25	6.69	42	15.6							
	25.5	6.8	42.3	15.9							
	26	8.36	46.2	19.7	1020	1520	4000	4500	842	1310	
	26.5	8.49	46.6	20.1							
	27	8.61	46.9	20.4							
	27.5	8.74	47.3	20.7							
	28	8.86	47.6	21							
	28.5	8.99	47.9	21.3							

LB型防爆电动单梁起重机

LB Type Explosion Proof Electric Single Girder Crane

起重量 Lifting capacity	跨度 Span	起重机总重 Crane total weight	最大轮压 Max.wheel load	最小轮压 Min.wheel load	基本尺寸 (mm) Basic dimensions					
t	S(m)	(地面操作) G (t) Ground controlling	Rmax (kN)	Rmin (kN)	踏面至主梁顶 H1(mm) Wheel tread approach to top	踏面至吊钩中心 H2(mm) Wheel tread approach to center of hook	端梁轮距 W(mm) End carriage wheelbase	端梁总长 B(mm) Total length of end carriage	吊钩左极限 C1(mm) Hook approach to limit position on the left	吊钩右极限 C2(mm) Hook approach to limit position on the right
10	7.5	3.06	50.8	5.9	735	1815	1500	2000	1293	1893
	8	3.13	51.6	6						
	8.5	3.21	52.3	6.1						
	9	3.28	53	6.3						
	9.5	3.36	53.6	6.4						
	10	3.43	54.2	6.5						
	10.5	3.51	54.7	6.7						
	11	3.58	55.2	6.9	835	1815	2000	2500	1293	1893
	11.5	3.95	56.4	7.8						
	12	4.03	56.9	7.9						
	12.5	4.12	57.3	8.1						
	13	4.21	57.8	8.3						
	13.5	4.3	58.2	8.5						
	14	4.38	58.6	8.7						
	14.5	4.64	59.4	9.4	890	1840	2000	2500	1293	1893
	15	4.72	59.8	9.5						
	15.5	4.82	60.2	9.8						
	16	4.91	60.5	10						
	16.5	5	60.9	10.2						
	17	5.09	61.2	10.4						
	17.5	5.59	62.5	11.8						
	18	5.69	62.9	12	880	1950	2500	3000	1293	1893
	18.5	5.8	63.3	12.3						
	19	5.89	63.6	12.5						
	19.5	6.01	64	12.8						
	20	6.83	66.1	14.8						
	20.5	6.94	66.5	15.1						
	21	7.05	66.9	15.3						
	21.5	7.18	67.3	15.7	920	1970	3000	3500	1293	1893
	22	7.29	67.6	15.9						
	22.5	7.42	68	16.2						
	23	8.55	71.9	20.1						
	23.5	8.67	72.4	20.5						
	24	8.8	72.8	20.8						
	24.5	8.97	73.3	21.2						
	25	9.09	73.6	21.5	1065	1865	3500	4000	1293	1893
	25.5	9.22	74.1	21.9						
	26	13.03	82.5	30.2						
	26.5	13.23	83	30.7						
	27	13.4	83.5	31.2						
	27.5	13.6	84.1	31.7						
	28	13.8	84.6	32.1						
	28.5	14	85.1	32.6	1160	1890	4000	4700	1293	1893

LB型防爆电动单梁起重机

LB Type Explosion Proof Electric Single Girder Crane

起重量 Lifting capacity	跨度 Span	起重机总重 Crane total weight	最大轮压 Max.wheel load	最小轮压 Min.wheel load	基本尺寸 (mm) Basic dimensions									
t	S(m)	(地面操作) G (t) Ground controlling	Rmax (kN)	Rmin (kN)	踏面至主梁顶 H1(mm) Wheel tread approach to top	踏面至吊钩中心 H2(mm) Wheel tread approach to center of hook	端梁轮距 W(mm) End carriage wheelbase	端梁总长 B(mm) Total length of end carriage	吊钩左极限 C1(mm) Hook approach to limit position on the left	吊钩右极限 C2(mm) Hook approach to limit position on the right				
16	7.5	3.39	76.5	6.6	835	2445	1500	2000	1293	1893				
	8	3.47	77.7	6.8										
	8.5	3.57	78.7	7										
	9	3.66	79.7	7.1										
	9.5	3.75	80.6	7.3										
	10	3.84	81.4	7.5										
	10.5	3.94	82.1	7.7	890	2470	2000	2500	1293	1893				
	11	4.03	82.8	7.9										
	11.5	4.42	84.3	8.9										
	12	4.52	84.9	9.1										
	12.5	4.63	85.6	9.4										
	13	4.73	86.1	9.6										
	13.5	4.84	86.7	9.8	980	2520	2000	2500	1293	1893				
	14	4.94	87.3	10.1										
	14.5	5.76	89.6	12.1			1065	2495			2500	3000	1293	1893
	15	5.88	90.2	12.4										
	15.5	6.01	90.7	12.7										
	16	6.13	91.2	13										
	16.5	6.26	91.8	13.3										
	17	6.37	92.3	13.5	1135	2545			3000	3500				
	17.5	7.35	94.9	16										
	18	7.48	95.4	16.3										
	18.5	7.64	96	16.7										
	19	7.77	96.4	17										
	19.5	7.94	97	17.4										
	20	8.43	98.4	18.6	1200	2590	3500	4200	1293	1893				
	20.5	8.59	98.9	19										
	21	8.74	99.4	19.4										
	21.5	8.9	99.9	19.8										
	22	9.04	100.4	20.1										
	22.5	9.21	100.9	20.5										
	23	12.17	108.4	27.9	1300	2600	4000	4700	1293	1893				
	23.5	12.38	109.1	28.5										
	24	12.56	109.6	28.9										
	24.5	12.77	110.3	29.4										
	25	12.96	110.8	29.9										
	25.5	13.17	111.4	30.4										
	26	14.26	114.2	33.1										
	26.5	14.48	114.9	33.7										
	27	14.67	115.4	34.1										
	27.5	14.9	116.1	34.7										
	28	15.1	116.6	35.2										
	28.5	15.3	117.2	35.7										

LB型防爆电动单梁起重机

LB Type Explosion Proof Electric Single Girder Crane


起重量 Lifting capacity	跨度 Span	起重机总重 Crane total weight	最大轮压 Max.wheel load	最小轮压 Min.wheel load	基本尺寸 (mm) Basic dimensions					
t	S(m)	(地面操作) G (t) Ground controlling	Rmax (kN)	Rmin (kN)	踏面至主梁顶 H1(mm) Wheel tread approach to top	踏面至吊钩中 心 H2(mm) Wheel tread approach to center of hook	端梁轮距 W(mm) End carriage wheelbase	端梁总长 B(mm) Total length of end carriage	吊钩左极限 C1(mm) Hook approach to limit position on the left	吊钩右极限 C2(mm) Hook approach to limit position on the right
20	7.5	5.27	99	10.2	900	2400	2000	2700	1394	1933
	8	5.38	100.4	10.4						
	8.5	5.52	101.8	10.6						
	9	5.64	103	10.8						
	9.5	5.77	104.2	11.1						
	10	5.89	105.2	11.3						
	10.5	6.02	106.2	11.6	970	2430	2000	2700	1394	1933
	11	6.14	107.1	11.8						
	11.5	6.71	109.1	13.2						
	12	6.84	109.9	13.5						
	12.5	6.99	110.8	13.8						
	13	7.12	111.5	14.1						
	13.5	7.27	112.3	14.5	1050	2490	2000	2700	1394	1933
	14	7.4	113	14.8						
	14.5	8.55	116.3	17.6			2000	2700	1394	1933
	15	8.71	117	18						
	15.5	8.9	117.7	18.4			2500	3200	1394	1933
	16	9.05	118.4	18.8						
	16.5	9.24	119.2	19.2	1130	2550	2500	3200	1394	1933
	17	9.4	119.8	19.6						
	17.5	10.11	121.8	21.4						
	18	10.28	122.5	21.8						
	18.5	10.48	123.2	22.3						
	19	10.66	123.8	22.7	1200	2590	3000	3700	1394	1933
	19.5	10.85	124.5	23.2						
	20	11.62	126.6	25.1						
	20.5	11.84	127.3	25.6						
	21	12	127.9	26						
	21.5	12.2	128.6	26.5	1300	2600	3500	4200	1394	1933
	22	12.4	129.2	27						
	22.5	12.6	129.9	27.5						
	23	13.6	132.5	30						
	23.5	13.8	133.2	30.6						
	24	140.5	133.8	31						
	24.5	142.8	134.5	31.6						
	25	144.7	135.1	32.1						
	25.5	146.9	135.8	32.6						

- 注: 1.司机室操作时起重机总重增加0.5t, 最大、最小轮压均增加2kN。
2.如有其他要求, 请在订货时特别提出。
3.我公司保留在无需任何通知的情况下对以上信息进行变更的权力。

Note: 1.Total weight should increase 0.5t, the minimum and maximum wheel pressure each increase 2KN if cab operation.
2.Other requirements please put forward when you place an order.
3.We reserve the right to change above information without any notice.

LHB型防爆电动葫芦桥式起重机

LHB Type Explosion Proof Electric Hoist Double Girder Crane

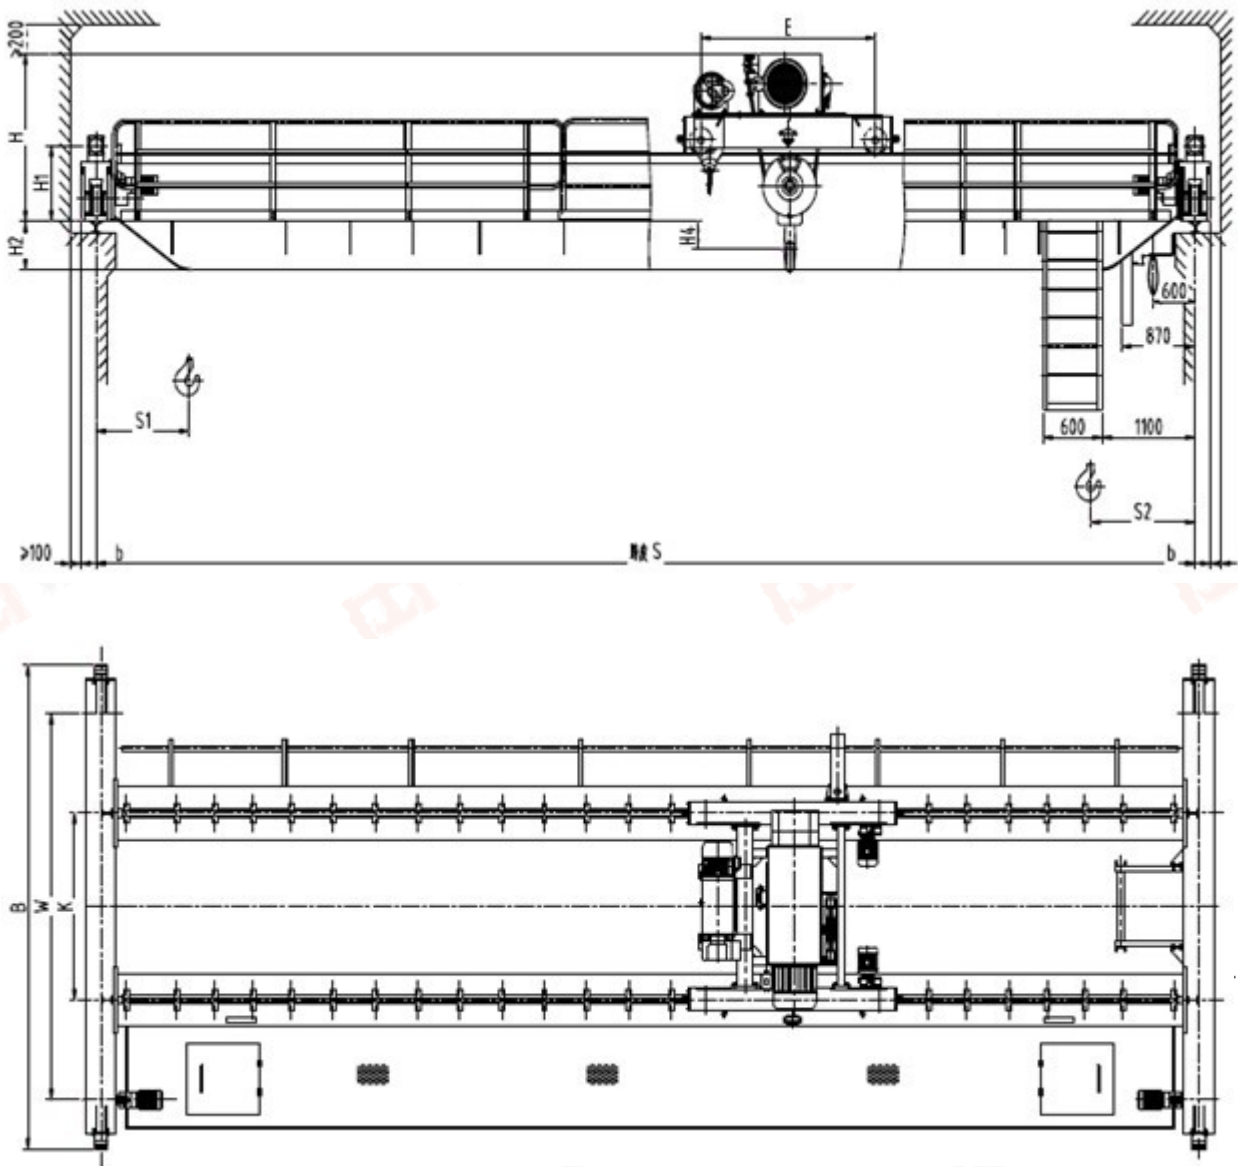

LHB型防爆电动葫芦桥式起重机

LHB Type Explosion Proof Electric Hoist Double Girder Crane

起重量 Lifting capacity	t	5									
工作级别 Working system		A3									
防爆标志 Explosion proof grade		Exd II BT4； Exd II CT4									
操作方式 Operational method		地面操作 Ground controlling									
主钩起升速度 Main hook lifting speed	m/min	8(0.8/8)									
副钩起升速度/ Aux. hook lifting speed	m/min										
小车运行速度 Crab travelling speed	m/min	20									
大车运行速度 Crane travelling speed	m/min	20									
电动葫芦 Electric hoist		HB									
起升高度 Lifting height	m	6、9、12									
电源 Power source		三相交流 Three phase.AC 380V 50HZ									
荐用大车轨道 Steel track		P30									
跨度 Span	m	7.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	
最大轮压 Max. wheel pressure	kN	34	38	42	43	49	53	61	65	70	
自重 Crane weight	kg	4456	5181	6358	7466	9094	10613	13825	15615	17547	
整机总功率 Total power		kW	10.7				12.1				
基本尺寸 Basic dimensions	B	mm	3870					4870			
	W	mm	3200					4000			
	K	mm	1400								
	E	mm	1220								
	H	mm	1238					1358			
	H1	mm	565					685			
	H2	mm	80	80	180	280	380	384	364	464	564
	H3	mm	2605	2605	2705	2805	2905	2909	2889	2989	3089
	H4	mm	-22					-142			
	b	mm	120					135			
	S1	mm	974								
	S2	mm	1100				1550	1680	1940	2070	2330

LHB型防爆电动葫芦桥式起重机

LHB Type Explosion Proof Electric Hoist Double Girder Crane

起重量 Lifting capacity	t	10/3										
工作级别 Working system		A3										
防爆标志 Explosion proof grade		Exd Ⅱ BT4； Exd Ⅱ CT4										
操作方式 Operational method		地面操作 Ground controlling										
主钩起升速度 Main hook lifting speed	m/min	7(0.7/7)										
副钩起升速度 Aux. hook lifting speed	m/min	8(0.8/8)										
小车运行速度 Crab travelling speed	m/min	20										
大车运行速度 Crane travelling speed	m/min	20										
电动葫芦 Electric hoist		HB										
起升高度 Lifting height	m	9、12										
电源 Power source		三相交流 Three phase.AC 380V 50HZ										
荐用大车轨道 Steel track		P30										
跨度 Span	m	7.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5		
最大轮压 Max. wheel pressure	kN	60.5	62.9	70.2	73.8	81.1	86.4	94.6	100.9	108.1		
自重 Crane weight	kg	5775	6737	8015	9467	12076	13963	17036	19426	22181		
整机总功率 Total power	kW	17.6										
基本尺寸 Basic dimensions	B	mm	4270				4470		4870			
	W	mm	3600						4000			
	K	mm	1800									
	E	mm	1800									
	H	mm	1440				1560		1625			
	H1	mm	565				685		750			
	H2	mm	180	180	280	430	314	464	499	599	699	
	H3	mm	2705	2705	2805	2955	2839	2989	3024	3124	3224	
	H4	mm	-26				-146		-211			
	b	mm	120				150		230			
	S1	mm	1413									
	S2	mm	1147			1347	1550	1680	1940	2070	2330	

LHB型防爆电动葫芦桥式起重机

LHB Type Explosion Proof Electric Hoist Double Girder Crane

起重量 Lifting capacity	t	16/3									
工作级别 Working system		A3									
防爆标志 Explosion proof grade		Exd II BT4； Exd II CT4									
操作方式 Operational method		地面操作 Ground controlling									
主钩起升速度 Main hook lifting speed	m/min	3.5(0.35/3.5)									
副钩起升速度 Aux. hook lifting speed	m/min	8(0.8/8)									
小车运行速度 Crab travelling speed	m/min	20									
大车运行速度 Crane travelling speed	m/min	20									
电动葫芦 Electric hoist		HB									
起升高度 Lifting height	m	9、12									
电源 Power source		三相交流 Three phase.AC 380V 50HZ									
荐用大车轨道 Steel track		P30									
跨度 Span	m	7.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	
最大轮压 Max. wheel pressure	kN	87.5	95	101.1	107.5	115.9	121.9	131.2	138.8	146.7	
自重 Crane weight	kg	6738	8025	9498	11428	14816	16866	20258	23069	26055	
整机总功率 Total power		kW									
基本尺寸 Basic dimensions	B	mm	4620				4820		5020		
	W	mm	3600				3800		4000		
	K	mm	2000								
	E	mm	2000								
	H	mm	1564				1629				
	H1	mm	685				750				
	H2	mm	110	162	264	364	399	549	651	751	901
	H3	mm	2635	2687	2789	2889	2924	3074	3176	3276	3426
	H4	mm	403				338				
	b	mm	150				230				
	S1	mm	1505								
	S2	mm	1255				1550	1680	1940	2070	2330

LHB型防爆电动葫芦桥式起重机


LHB Type Explosion Proof Electric Hoist Double Girder Crane

起重量 Lifting capacity		t	20/5								
工作级别 Working system			A3								
防爆标志 Explosion proof grade			Exd II BT4； Exd II CT4								
操作方式 Operational method			地面操作 Ground controlling								
主钩起升速度 Main hook lifting speed		m/min	3.5(0.35/3.5)								
副钩起升速度 Aux. hook lifting speed		m/min	8(0.8/8)								
小车运行速度 Crab travelling speed		m/min	10								
大车运行速度 Crane travelling speed		m/min	10								
电动葫芦 Electric hoist			HB								
起升高度 Lifting height		m	9、12、15								
电源 Power source			三相交流 Three phase.AC 380V 50HZ								
荐用大车轨道 Steel track			P38								
跨度 Span		m	7.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
最大轮压 Max. wheel pressure		kN	110.5	119.5	127.4	134.6	141.5	148.8	153.8	165.2	172.8
自重 Crane weight		kg	9374	10535	12346	14350	16819	19259	20906	25115	27986
整机总功率 Total power		kW	26.5				27.9				
基本尺寸 Basic dimensions	B	mm	4620				4820		5020		
	W	mm	3600				3800		4000		
	K	mm	2000								
	E	mm	2100								
	H	mm	1722								
	H1	mm	750								
	H2	mm	49	149	249	353	453	553	703	803	953
	H3	mm	2574	2674	2774	2878	2978	3078	3228	3328	3478
	H4	mm	394								
	b	mm	230								
	S1	mm	1490								
	S2	mm	1370				1570	1680	1940	2070	2330

LHB型防爆电动葫芦桥式起重机

LHB Type Explosion Proof Electric Hoist Double Girder Crane

起重量 Lifting capacity		t	32/5						
工作级别 Working system			A3						
防爆标志 Explosion proof grade			Exd II BT4； Exd II CT4						
操作方式 Operational method			地面操作 Ground controlling						
主钩起升速度 Main hook lifting speed		m/min	3(0.3/3)						
副钩起升速度 Aux. hook lifting speed		m/min	8(0.8/8)						
小车运行速度 Crab travelling speed		m/min	20						
大车运行速度 Crane travelling speed		m/min	20						
电动葫芦 Electric hoist			HB						
起升高度 Lifting height		m	9、12						
电源 Power source			三相交流 Three phase.AC 380V 50HZ						
荐用大车轨道 Steel track			P43						
跨度 Span		m	7.5	10.5	13.5	16.5	19.5	22.5	25.5
最大轮压 Max. wheel pressure		kN	158.7	175.2	186.6	196.4	207.4	217.7	222.4
自重 Crane weight		kg	11575	13394	15372	17560	20790	24107	25316
整机总功率 Total power		kW	36.4						
基本参数 Basic dimensions	B	mm	4820				5020		
	W	mm	3800				4000		
	K	mm	2000						
	E	mm	2700						
	H	mm	1863				1963		
	H1	mm	750				850		
	H2	mm	151	251	355	457	457	609	709
	H3	mm	2676	2776	2880	2982	2982	3134	3234
	H4	mm	542				442		
	b	mm	230						
	S1	mm	1705						
	S2	mm	1865						

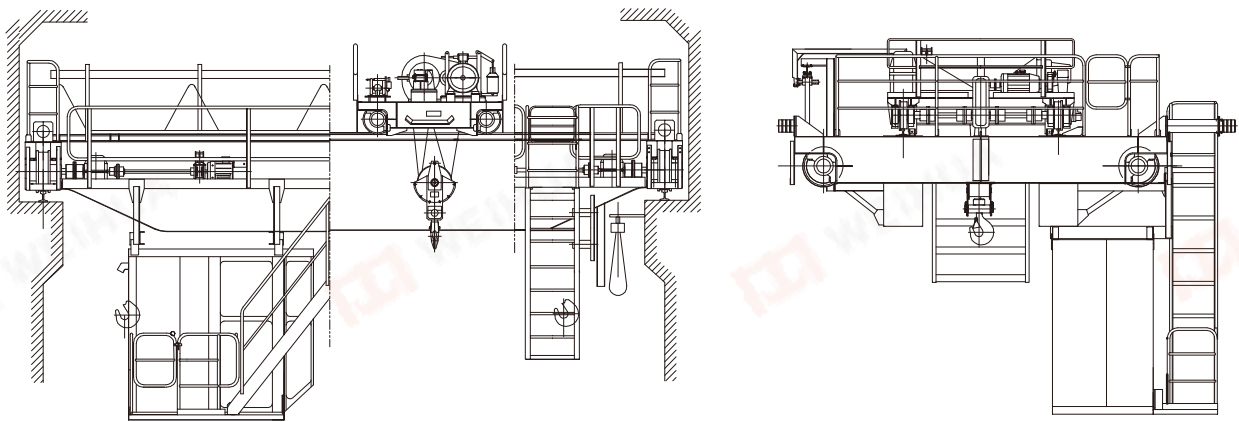

QB型5~100/30t防爆吊钩桥式起重机

QB OVERHEAD EXPLOSION-PROOF CRANE WITH HOOK CAP.5-100/30T

产品概述：

QB型防爆吊钩桥式起重机所有电机、电器防爆性能符合GB3836.2-2000《爆炸性气体环境用防爆电气设备第2部分：隔爆型"d"》、整机性能符合JB/T5897-2006《防爆桥式起重机》标准之规定，经国家指定的防爆产品检验单位检验合同，取得了《防爆合格证》。防爆标志分别为ExdIIBT4，ExdIICT4。

本产品适用于工厂内传爆能力不高于II B或II C级，引燃温度组别为T1~T4组的可燃性气体或蒸气与空气形成的爆炸性气体混合物的场所，适用于危险区域为1区或2区（详见GB3836.1—2000）。

本产品工作级别为中级。

Product Introduction:


The explosion-proof performance of all electrical machines and electric appliances of QB model explosion-proof overhead crane with hook conforms to the prescriptions of GB3836.2-2000 Explosion-proof electrical Apparatus for Explosive Atmosphere Part two: Flameproof Type; the performance of complete machine conforms to the prescriptions of JB/75897-2006 Explosion-proof Bridge Crane. The crane is qualified inspected by inspection unit of blast-proof product which is appointed by the state. The crane has got Certification of Conformity of An Instrument for Explosive Atmosphere. The signs of explosion-proof are Exd II BT4 and Exd II CT4 respectively.

The product is applicable to the place in the factory where the capability of transmitting -explosive is no higher than grade II B or II C, and where has mixture of detonating gas which is composed of flammable gas or steam whose ignition temperature team belongs to T1~T4 team, and air. The applicable danger area is Area 1 or Area 2(see GB3836.1-2000)

The working class is middle

QB型5~10t防爆吊钩桥式起重机

QB Overhead explosion-proof Crane with Hook Cap. 5-10t

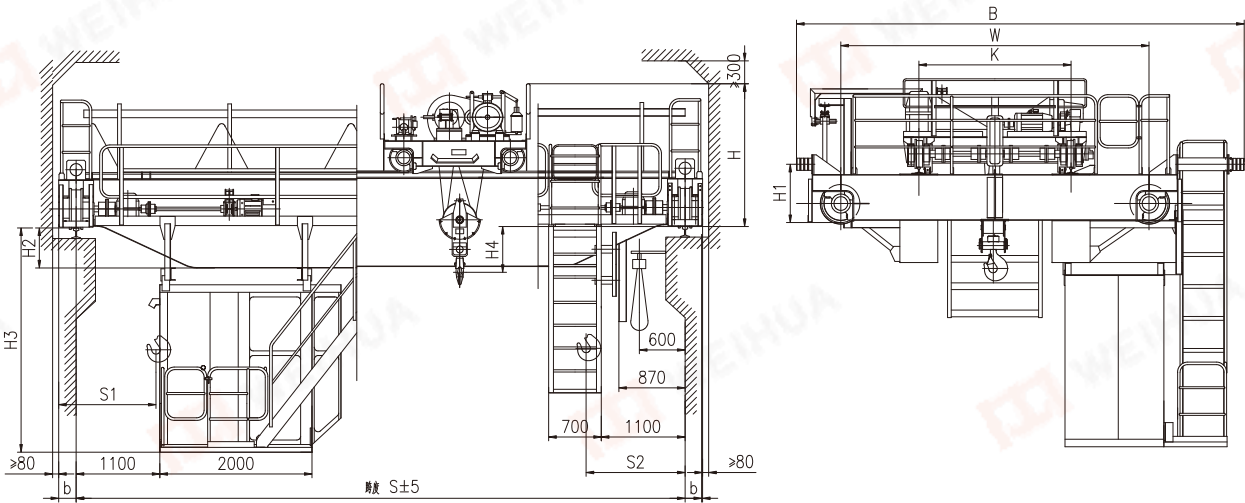


技术规格 Technical Specifications

起重量 Lifting capacity		t	5								10															
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5								
起升高度 Lifting Height			16								16															
工作制度 Duty			A4								A4															
防爆等级 Explosion-proof grade			ExdIIBT4 (ExdIICT4)								ExdIIBT4 (ExdIICT4)															
速度 Speed	起升 Hoisting	m/min	5								5															
	小车运行 Crab travelling		19.6(14.6)								20.5(14.6)															
	大车运行 Crane travelling		22.3(12)								22.3(12)															
极限尺寸 limit dimension	S1		800								1050															
	S2		1250								1300															
主要尺寸 main dimension	H	mm	1763								1800															
	H1		765								765															
	H2		-24	126	226	376	526	676	826	976	-24	126	226	376	526	678	828	978								
	H3		2396	2546	2646	2796	2946	3096	3246	3396	2396	2546	2646	2796	2946	3098	3248	3398								
	H4		71								602				552											
	K		1400								2000															
	W		3400				3550				5000				4050				5000							
	B		5054				5204				5948				5704				5882				5948			
	b		230																							
最大轮压 Max.Wheel Loading		kN	72	78	84	92	97	109	117	124	101	108	117	122	126	135	144	152								
电机总功率 Total Power		kw	10								15.5															
荐用钢轨 Crane Rail Recommended			43kg/m																							
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V																							

QB型16/3.2~20/5t防爆吊钩桥式起重机

QB Overhead explosion-proof Crane with Hook Cap. 16/3. 2-20/5t

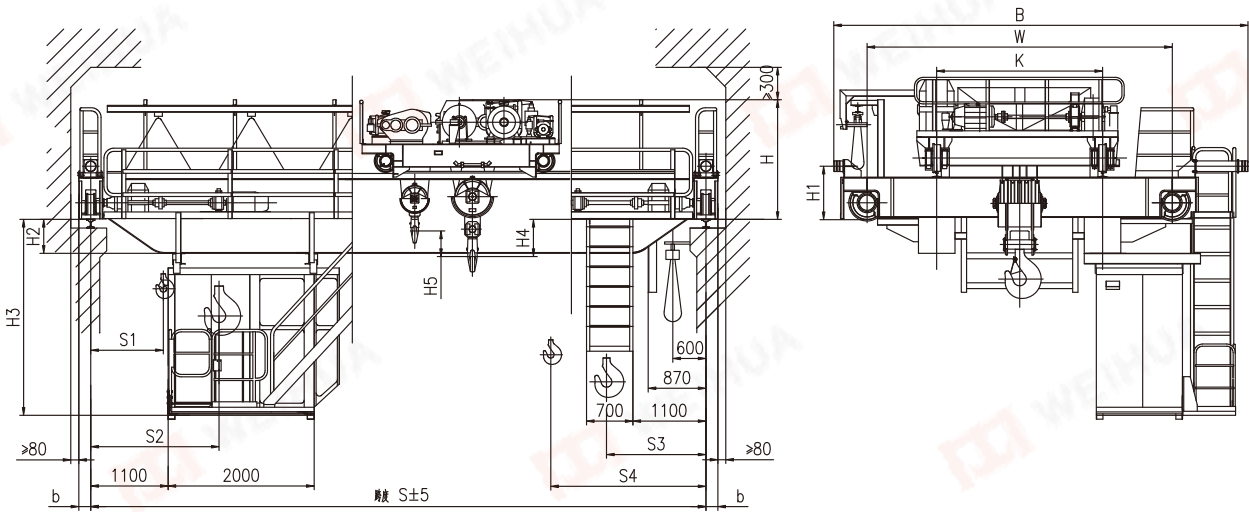


技术规格 Technical Specifications

起重量		主钩 Main	t	16								20									
Lifting capacity		副钩 Aux.		3.2								5									
跨度 Span			m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5		
起升高度 Lifting Height	主钩 Main			16								12									
	副钩 Aux.			18								14									
工作制度 Duty				A4								A4									
防爆等级 Explosion-proof grade				ExdIIBT4 (ExdIICT4)								ExdIIBT4 (ExdIICT4)									
速度 Speed	主起升 Main		m/min	4.3								4.2									
	副起升 Aux			5.6								5									
	小车运行 Crab travelling			20.5(13)								20.5(13)									
	大车运行 Crane travelling			19 (12.1)								19 (12.1)									
极限尺寸 limit dimension	S1			1040								1030									
	S2			1850								1930									
	S3			1500								1420									
	S4			2310								2320									
主要尺寸 main dimension	H		mm	2043				2043				2045		2045							
	H1			765				765				765		765							
	H2			130	230	380	528	678	828	978	130	232	382	530	680	830	980				
	H3			2550	2650	2800	2948	3098	3248	3398	2550	2598	2658	2808	2958	3108	3258				
	H4		860				780				858		858								
	H5		mm	770								858		496							
	K			2000																	
	W			4000				4100				5000				4000		4100		5000	
	B			5864				5928				6438				5864		5928		6438	
	b			230				230				230		230							
最大轮压 Max.Wheel Loading			kN	138	146	152	166	173	185	194	203	160	167	176	189	197	209	220	229		
电机总功率 Total Power			kw	23.9(23.2)								25.7(25)									
荐用钢轨 Crane Rail Recommended				43kg/m或QU70																	
电源 Power Supply				三相交流 3—Phase A.C.50Hz 380V																	

QB型32/5~50/10t防爆吊物桥式起重机


Overhead explosion-proof Crane with Hook Cap. 32/5-50/10t

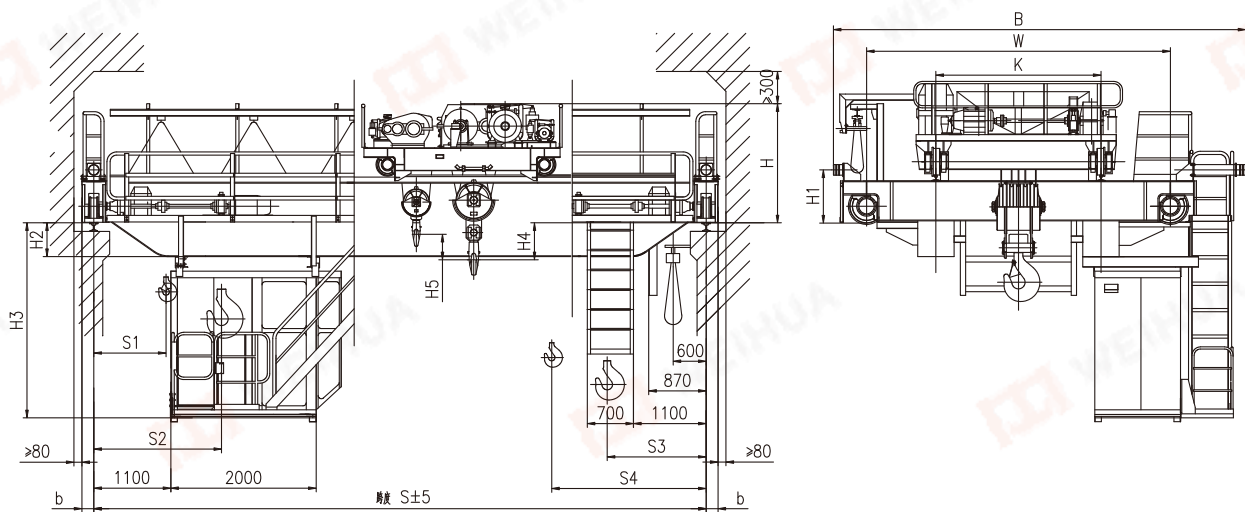

技术规格 Technical Specifications

起重量 Lifting capacity		主钩 Main	t	32								50															
		副钩 Aux.		5								10															
跨度 Span			m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5								
起升高度 Lifting Height	主钩 Main			16								12															
	副钩 Aux.			18								16															
工作制度 Duty				A4								A4															
防爆等级 Explosion-proof grade				ExdIIBT4 (ExdIICT4)								ExdIIBT4 (ExdIICT4)															
速度 Speed	主起升 Main		m/min	4.1								3															
	副起升 Aux			5								5															
	小车运行 Crab travelling			17.5(13)								15.1(15.1)															
	大车运行 Crane travelling			19.1(12.4)								17(14.5)															
极限尺寸 limit dimension	S1			1070								1005															
	S2			2050								2200															
	S3			1700								2000															
	S4			2680								3195															
主要尺寸 main dimension	H		mm	2230								2365		2371													
	H1			815								865															
	H2			180	184	334	484	634	784	934	1034	71	246	252	402	552	702	852	952								
	H3			2508	2512	2662	2682	2832	2982	3132	3232	2339	2514	2520	2670	2820	2970	3120	3220								
	H4			800								1020		1014													
	H5			790								948															
	K			2500																							
	W			4650				4700				5000				4800				5000							
	B			6478				6628				6928				6828				6858				7058			
	b			230								260															
最大轮压 Max.Wheel Loading			kN	234	248	260	275	287	303	314	325	326	348	367	379	398	415	428	443								
电机总功率 Total Power			kw	42.2(40.7)								50.9(49.1)				53.9(49.1)											
荐用钢轨 Crane Rail Recommended				QU70或方钢90								QU80或方钢100															
电源 Power Supply				三相交流 3—Phase A.C.50Hz 380V																							

QB型75/20t防爆吊钩桥式起重机

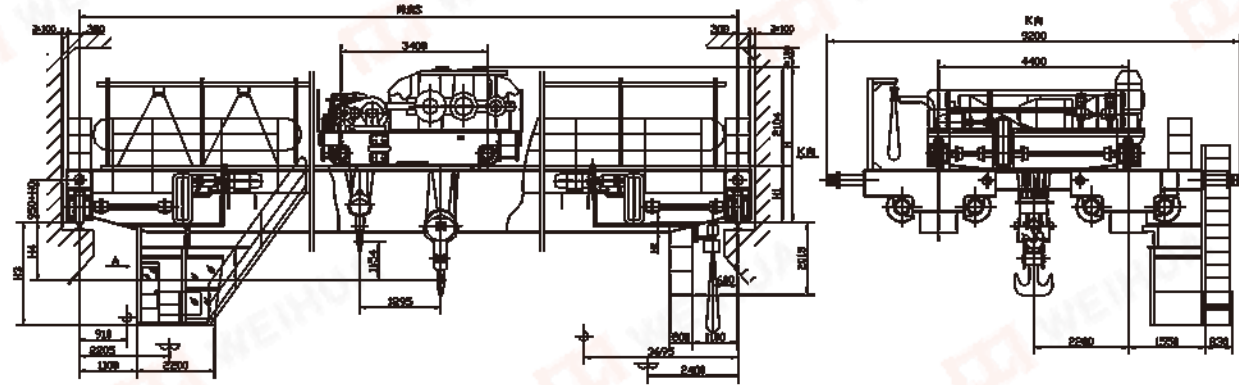


技术规格 Technical Specifications

起重量 Lifting capacity		t	75/20						
跨度 Span		m	13.5	16.5	19.5	22.5	25.5	28.5	31.5
最大起升高度 Max.Lifting Height		m	20/22						
工作级别 Working system		A4							
防爆级别 Explosion-proof grade		Exd Ⅱ BT4; (Exd Ⅱ CT4)							
速度 speed	主起升 Main lifting	m/min	1.86						
	副起升 Aux lifting		4.2						
	小车运行 trolley travelling		10						
	大车运行 crane travelling		15.4; (9.88)				15.7 (9.9)		
电动机 Motor	起升 lifting	Type Kw	YBZE250M-8/30 (YBZE250M-8)						
	副起升 Aux lifting		YBZE180L-6/15 (YBZE180L-6)						
	小车运行 trolley travelling		YBZE132M2-6/3.7						
	大车运行 crane travelling		YBZE132M2-6/3.7 × 2				YBZE160M1-6/5.5 × 2 YBZE132M2-6/3.7 × 2		
主要尺寸 (mm)Dimensions	H	mm	3302	3302	3302	3306	3304	3308	3310
	H1		1318	1318	1318	1322	1320	1324	1326
	H2		290	440	542	546	844	844	850
	H3		2710	2860	2962	2966	3264	3268	3270
	H4		872	872	872	868	870	866	864
最大轮压 Max wheel load		KN	219	302	314	324	333	345	356
荐用钢轨 Steel track		Kg/m	QU100						
电源Power source			三相交流 380V 50HZ 3-Phase A.C. 380V 50HZ						
注: 1、H0为大车缓冲器增加的高度									

QB型100/30t防爆吊钩桥式起重机

QB Overhead explosion-proof crane with hook Cap. 100/30t

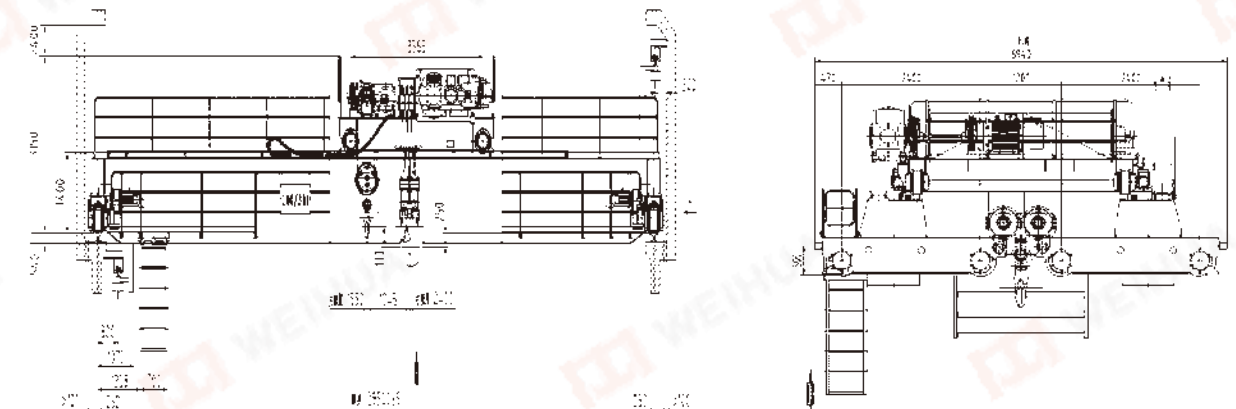


技术规格 Technical Specifications

起重量 Lifting Capacity		t	100/30	
跨度 Span		m	28.5	
最大起升高度 Max Lifting Height		m	13/14	
工作级别 Duty Classification			A4	
防爆级别 Explosion-Proof Grade			Exd II BT4; (Exd II CT4)	
速度 Speed	主起升 Main Lifting	m/min	0.3~3	
	副起升 Aux Lifting		0.3~3	
	小车运行 Cross Travel		0.5~5	
	大车运行 Crane Travelling		0.5~10	
总功率 Total Power		kw	105.2	
最大轮压 Maximum Wheel Load		kN	361	
荐用钢轨 Steel Track		kg/m	QU100	
电源 Power Source			3P	A.C 50Hz 380V

QB型5~10t新型防爆吊钩桥式起重机

QB Overhead explosion-proof crane with hook Cap.5-10t

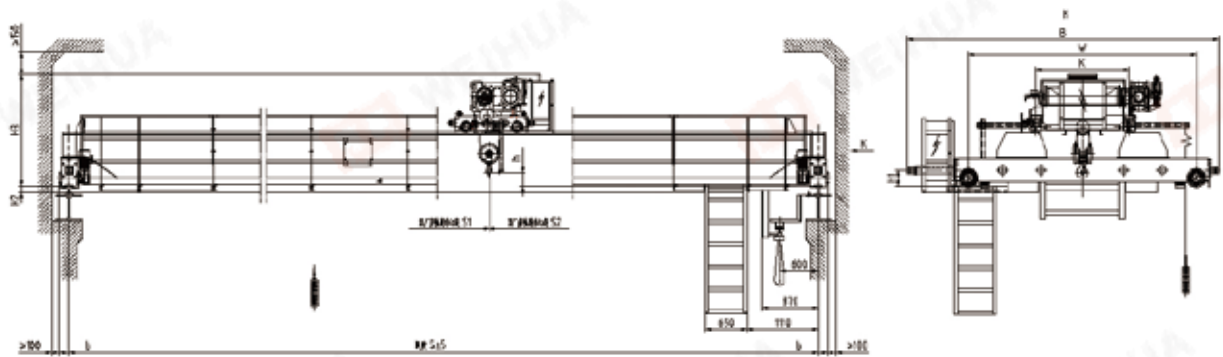


技术规格 Technical Specifications

起重量 Lifting Capacity	主钩Main	t	5								10							
	副钩Aux		——								——							
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			18								18							
			——								——							
工作制度Working Duty			A5								A5							
防爆等级Explosion-proof Grade			ExdⅡBT4 (ExdⅡCT4)								ExdⅡBT4 (ExdⅡCT4)							
速度 Speed	主钩Main	m/min	0.57~5.7								0.6~6							
	副钩Aux		——								——							
	小车运行 Trolley Travelling		1.6~16								1.6~16							
	大车运行 Crane Travelling		1.6~16								1.6~16							
极限尺寸 Limit Dimension	S1	mm	1065								1150							
	S2		1445								1450							
	L		——								——							
	h		64	64	84	84	209	259	261	261	-51	-31	-31	19	69	71	75	75
	h1		——								——							
主要尺寸 Main dimension	H1	mm	200				250				250							
	H2		100	150	130	124	105	155	205	255	75	105	155	105	155	205	255	355
	H3		1800	1800	1820	1820	1950	2000	2000	2000	1900	1920	1920	1970	2030	2030	2030	2030
	B		4644				4844				5180							
	W		3250				3550				3800							
	K		1450								1700							
	b		145				150				150							
	最大轮压 Max.Wheel Loading		KN	45	48	53	56	62	67	74	78	72	77	81	87	92	98	104
电机总功率 Tatal Power		KW	7.7				8.1				13.2				13.6			
荐用钢轨 Crane Rail Recommended			38kg/m								38kg/m							
电源 Power Supply			三相交流 50Hz 380V								三相交流 50Hz 380V							

备注：1、表中速度为公称速度，电机、减速度厂家不同有适当差异。
2、表中吊钩中心高h值为负值时表示在大车轨道面以下。
Remarks: 1、The speed in the table is nominal speed, there are some differences of motor and reducer because of different manufacturers.
2、In the table, if center height (h value) of hook is negative, this shows it is below the crane rail.

QB型16~20t新型防爆吊钩桥式起重机

QB Overhead explosion-proof crane with hook Cap.16-20t

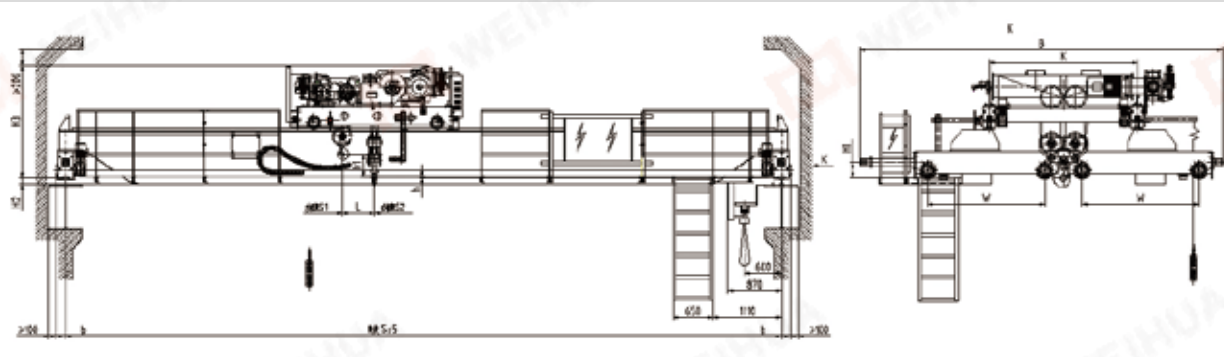


技术规格 Technical Specifications

起重量 Lifting Capacity	主钩Main	t	16								20								
	副钩Aux		5								5								
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	
起升高度 Lifting Height			18								18								
			18								18								
工作制度Working Duty			A5								A5								
防爆等级Explosion-proof Grade			Exd II BT4 (Exd II CT4)								Exd II BT4 (Exd II CT4)								
速度 Speed	主钩Main	m/min	0.3~3								0.3~3								
	副钩Aux		0.57~5.7								0.57~5.7								
	小车运行 Trolley Travelling		1.6~16								1.6~16								
	大车运行 Crane Travelling		1.6~16								1.6~16								
极限尺寸 Limit Dimension	S1	mm	1128								1128								
	S2		1678								1678								
	L		519								519								
	h		-85	-185	-35	15	19	19	19	119	-103	-99	-49	1	5	5	5	105	
	h1		366								384								
主要尺寸 Main dimension	H1	mm	250								250								
	H2		105	105	105	205	255	355	455	355	105	155	105	205	255	355	455	455	
	H3		2113	2113	2163	2213	2217	2217	2217	2317	2113	2117	2167	2217	2221	2221	2221	2321	
	B		5880								5880								
	W		1900								1900								
	K		2400								2400								
	b		170								170								
	最大轮压 Max. Wheel Loading		KN	56	60	63	66	71	73	77	81	65	69	72	76	81	85	88	92
电机总功率 Tatal Power		KW	19.8			20.6					19.8				20.6				
荐用钢轨 Crane Rail Recommended			43kg/m								43kg/m								
电源 Power Supply			三相交流 50Hz 380V								三相交流 50Hz 380V								

备注：1、表中速度为公称速度，电机、减速度厂家不同有适当差异。
2、表中吊钩中心高h值为负值时表示在大车轨道面以下。
Remarks: 1、The speed in the table is nominal speed, there are some differences of motor and reducer because of different manufacturers.
2、In the table, if center height (h value) of hook is negative, this shows it is below the crane rail.

QB型32~50t新型防爆吊钩桥式起重机

QB Overhead explosion-proof crane with hook Cap.32-50t

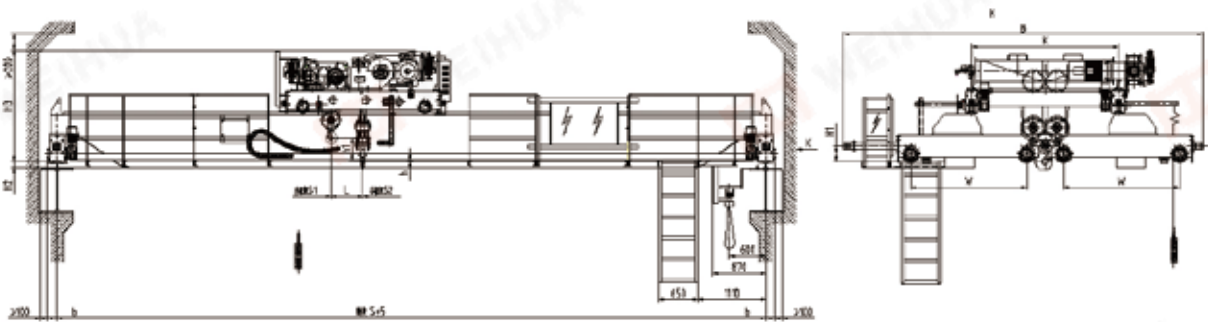

技术规格 Technical Specifications

起重量 Lifting Capacity	主钩Main	t	32								50							
	副钩Aux		5								10							
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			18								18							
			18								18							
工作制度Working Duty			A5								A5							
防爆等级Explosion-proof Grade			Exd II BT4 (Exd II CT4)								Exd II BT4 (Exd II CT4)							
速度 Speed	主钩Main	m/min	0.24~2.4								0.24~2.4							
	副钩Aux		0.57~5.7								0.6~6							
	小车运行 Trolley Travelling		1.6~16								1.6~16							
	大车运行 Crane Travelling		1.6~16								1.6~16							
极限尺寸 Limit Dimension	S1	mm	1100								1200							
	S2		1900								2000							
	L		575								596							
	h		170	166	116	116	116	12	-10.5	-16.5	292	288	288	284	180	180	180	76
	h1		605								576							
主要尺寸 Main Dimension	H1	mm	250								250							
	H2		105	105	205	355	455	455	532.5	632.5	132.5	232.5	332.5	432.5	432.5	532.5	632.5	632.5
	H3		2279	2283	2333	2333	2333	2437	2460	2466	2384	2388	2388	2392	2496	2496	2496	2600
	B		6280						6562		6962							
	W		1900						2000		2000							
	K		2400								3300							
	b		175								190							
最大轮压 Max. Wheel Loading		KN	97	101	107	111	116	122	129	132	141	150	155	162	170	175	181	188
电机总功率 Tatal Power		KW	24.6						27.1		40.4				43.4			
荐用钢轨 Crane Rail Recommended			43kg/m								43kg/m							
电源 Power Supply			三相交流 50Hz 380V								三相交流 50Hz 380V							

- 备注：
- 1、表中速度为公称速度，电机、减速器厂家不同有适当差异。
- 2、表中吊钩中心高h值为负值时表示在大车轨道面以下。
- Remarks:
- 1、The speed in the table is nominal speed, there are some differences of motor and reducer because of different manufacturers.
- 2、In the table, if center height (h value) of hook is negative, this shows it is below the crane rail.