卫华集团
WEIHUA GROUP

卫华让世界轻松起来

WEIHUA MAKES THE WORLD EASIER

卫华集团微信公众号　卫华股份微信公众号

总部地址：中国·河南省长垣市山海大道18号

公司网址：www.globalweihua.com

HQ add: No.18 Shanhai Road,Changyuan City,Henan Province,China
Website: www.globalweihua.com

本概况所有图片及文字信息受法律保护，未经卫华集团许可，不得擅自使用，违者必究！



产品样本
PRODUCT CATALOG

桥机类

OVERHEAD CRANE

■ 制造业单项冠军示范企业 ■ 全国质量标杆 ■ 中国机械工业百强 ■ 国家技术创新示范企业

产品分类
PRODUCT CLASSIFICATION

新型吊钩桥式起重机（符合FEM DIN等欧洲标准）
New-type overhead crane with hook（meetFEM.DINstandards）

双梁桥式起重机
Double girder overhead crane

WEIHUA

WEIHUA
WEIHUA

卫华让世界轻松起来

WEIHUA MAKES THE WORLD EASIER

卫华集团简介

GENERAL INTRODUCTION OF WEIHUA GROUP

卫华集团创建于1988年，是以研制桥门式起重机械、港口机械、矿用机械、电动葫芦、减速机、停车设备等产品为主的装备制造和以建筑工程总承包为主的大型企业集团。

卫华集团是中国重型机械工业协会、中国物料搬运协会和桥式起重机分会副理事长单位，先后荣获“制造业单项冠军示范企业”“中国机械工业百强”“全国守合同重信用企业”“千户集团企业”“全国质量标杆”“省长质量奖”等500多项荣誉称号。

作为国家技术创新示范企业、国家火炬计划重点高新技术企业，卫华拥有国家地方联合工程研究中心、国家认定企业技术中心、国家认可技术检验测试中心、博士后科研工作站、院士工作站等24个国家、省级研发平台。

以中国科学院院士杨叔子、中国工程院院士张铁岗为带头人的600人的科研团队，先后承接国家“863计划”“国家科技支撑计划”“国家火炬计划”项目，拥有授权专利941项，参与国际、国家、行业、地方标准119项。先后获得省部、市级科技进步奖项98项,获政府鉴定科技成果104项，其中创造世界纪录1项、国际领先4项、国际先进6项、国内领先93项。

在全球，卫华起重机械产品广泛应用于机械、冶金、矿山、电力、水利、铁路、港口、石油、化工等行业，服务于国内外大型企业和重点工程建设，并远销美国、英国、法国、俄罗斯、澳大利亚等130多个国家和地区。

创卫华国际品牌、兴中华民族工业。卫华将在“绿色化、智能化、定制化、网络化”方面，不断持续创新，为“卫华让世界轻松起来”的企业愿景而奋进。

1988

◆ 创建于1988年

500+

◆ 荣获500多项荣誉称号

130+

◆ 产品销往130多个国家和地区

WEIHUA

GENERAL INTRODUCTION OF WEIHUA GROUP

Founded in 1988, Weihua Group is a large-scale enterprise mainly engaged in machinery manufacturing including overhead crane, gantry crane, harbor machinery, mining machinery, electric hoist, reducer, parking equipment, etc, and EPC.

Weihua Group serves as Deputy Chief Director of the Heavy Machinery Industry Association , Material handling Association and the Sub-association of Bridge Crane in China. It has been honored with more than 500 awards such as “National Manufacturing Individual Champion Demonstration Enterprise”, “Top 100 Chinese Machinery Enterprise”, “Contract-honoring and Promise-keeping Enterprise of China”, “Qianhu Enterprise”, “National Quality Standard” , “Quality Award of Henan Provincial Governor”.

As National Innovation Demonstration Enterprise and Key High-Tech Enterprise of National Torch Plan, Weihua Group has established more than 24 national and provincial R&D platform such as United Engineering Research Center, National Enterprise Technology Center, National Technology and Inspection Center, Post-doctoral Scientific Research Workstation, Academician workstation.

Led by Mr. Yang Shuzi, the Academician of Chinese Academy of Sciences and Mr. Zhang Tiegang, the academician of Chinese Academy of Engineering, Weihua R&D team with more than 600 persons has undertaken “National 863 Program” ,“ National Science Supporting Program” and “National Torch Plan” . It has obtained 941 issued patents and participated in drafting 119international, national, industrial, local standards. It also has won 98 Provincial-level Scientific and Technological Progress Awards, 104 Scientific and Technological Achievement identified by government, including 1world record, 6 international advanced achievements, 93 domestic advanced achievements,and 4 international leading achievement.

Weihua’ s products have been exported to more than 130 countries and regions, including America, United Kingdom, France, Russia, Australia etc. which are widely used in various fields, including machinery, metallurgy, mining, electricity, water conservancy, railway, harbor, petroleum, chemical industry and etc. They have been serving large enterprises and key construction projects at home .

Create Weihua international brand, revitalize Chinese national industry. Weihua will keep on continuous innovation in terms of “greenization, intelligentialize, customization, internet” and strive for the enterprise’ s vision of “Weihua Makes The World Easier” .

制造业单项冠军示范企业

企业资质
ENTERPRISE QUALIFICATIONS

完善的质量保证体系，严格的质量控制，全面的质量管理，让每一个环节精益求精，每一个产品都日臻完美。国际先进的检测设备，国内权威的检测中心，稳步提升的质量检测水平，使我们在激烈的国际商战中，充满信心。

Complete quality assurance system, strict quality control and all-round quality management make each link and each product much more perfect. International top-ranktesting equipment, dumestic authoritative testing center and steadily-improved quality testing level make us have full assurance during violent international trade war.

制造业单项冠军示范企业





WEIHUA

企业荣誉
ENTERPRISE HONORS

卫华先后荣获“制造业单项冠军示范企业”“全国质量标杆”“中国机械工业百强”“千户集团企业”“国家火炬计划重点高新技术企业”“国家认定企业技术中心”“全国守合同重信用企业”“全国机械工业质量奖”“河南省省长质量奖”“全国工业品牌培育示范企业”等500多项荣誉称号。

Weihua has won more than 500 awards and honors, such as National Monomial Champion Demonstration Enterprise of Manufacturing Industry, National Quality Standard, Top 100 China Machinery, Qianhu Enterprise, Key High- Tech Enterprise of National Torch Plan, National Certified Enterprise Technology Center , Contract-honoring and Promise-keeping Enterprise, National Quality Award of Machine Building Industry, Quality Award of Henan Provincial Governor and National Demonstration Enterprise of Industrial Brand Cultivation.

产品展示(部分)

PRODUCTS

产品推陈出新是企业赖以生存和发展的基础。卫华在产品的开发上做到了你无我有、你有我优，形成了产品链，丰富了卫华的产品阵容。主导产品有“卫华”牌电动葫芦、单/双梁桥式起重机、门式起重机、冶金起重机、港口起重机械等各种起重设备产品。

Product innovation is the foundation for the survival and development of enterprises. Weihua has formed a chain of products persevering in that we have explored prior to anyone else and optimized while others just started to manufacture. The leading products include "Weihua"brand electric hoist, single/double girder bridge crane, gantry crane, metallurgical crane, port crane and other lifting equipment, which have greatly enriched our catalogues.

制造业单项冠军示范企业



800吨双梁桥机
800tons double girder overhead crane

320吨铸造起重机
320t Foundry crane





250t锻造起重机
250tons forging crane

冶金全自动换辊起重机
Metallurgical automatic roll change crane





可伸缩且可360度旋转电磁挂梁系统起重机
Extractable and 360 degree electromagnetic beam suspending system

电解铝多功能机组
Electrolytic AluminumMuli-Function Crane Group





防爆桥式起重机
Explosion-proof bridge crane



锯前全自动防摇摆分配吊车
Full automatic anti-sway allocation crane



全自动冶金上料起重机
Full-automatic Metallurgy Loading Crane

垃圾抓斗起重机
Overhead traveling crane with Grab for Garbage handling



阳极炭块堆垛起重机
Anode Block Stacking Crane



设计制造标准
及检验、验收标准

DESIGN AND MANUFACTURING STANDARDS,
INSPECTION AND ACCEPTANCE STANDARDS.

卫华集团有限公司所属企业生产的“卫华”牌系列起重机械，其整机性能符合现行标准要求，零部件符合设计图纸、工艺流程和各项技术要求。
同时，我集团根据用户要求按国际标准及国外先进标准进行各种非标产品的设计与制造。
各系列产品的主要设计制造标准及检验验收标准如下：

The performance of the Weihua Brand Cranes meets the requirements of the current standard. The parts and components meet the design drawings, technological process and various technical requirements. As well, our group designs and manufactures various non-standard products according to user requirements in accordance with international standards.
The main design and manufacturing standards, inspection and acceptance standards of each series of products are as follows:

钢丝绳电动葫芦 设计制造标准

Design and Manufacture Standards of Wire Rope Electric Hoist

1	GB/T 3811-2008	起重机设计规范
2	GB 6067.1 - 2010	起重机械安全规程 第1部分：总则
3	JB/T 9008.1 ~ 9008.2 - 2004	钢丝绳电动葫芦
4	JB/T 10222 - 2011	防爆钢丝绳电动葫芦

钢丝绳电动葫芦 检验、验收标准

Inspection and Acceptance Standards of Wire Rope Electric Hoist

1	JB/T 9008.1 ~ 9008.2 - 2004	钢丝绳电动葫芦
2	JB/T 10222 - 2011	防爆钢丝绳电动葫芦

电动单梁悬挂起重机 设计制造标准

Design and Manufacture Standards of Electric Single Girder Suspension Crane

1	GB/T 3811 - 2008	起重机设计规范
2	GB 6067.1 - 2010	起重机械安全规程 第1部分：总则
3	JB/T 2603 - 2008	电动悬挂起重机

电动单梁悬挂起重机 检验、验收标准

Inspection and Acceptance Standards of Electric Single Girder Suspension Crane

1	JB/T 2603 - 2008	电动悬挂起重机
2	GB 6067.1 - 2010	起重机械安全规程 第1部分：总则
3	GB/T 5905 - 2011	起重机试验规范和程序
4	GB/T 5972 - 2009	起重机钢丝绳保养、维护、安装、检验和报废
5	GB/T 10051.1 ~ 15 - 2010	起重吊钩

LD电动单梁起重机 设计制造标准

Design and Manufacture Standards of LD type Electric Single Girder Crane

1	GB/T 3811-2008	起重机设计规范
2	GB 6067.1 - 2010	起重机械安全规程 第1部分：总则
3	JB/T 1306-2008	电动单梁起重机
4	JB/T 10219-2001	防爆梁式起重机

LD电动单梁起重机 检验、验收标准

Inspection and Acceptance Standards of LD type Electric Single Girder Crane

1	JB/T 1306 - 2008	电动单梁起重机
2	GB 5905 - 2011	起重机试验规范和程序
3	GB 6067.1 - 2010	起重机械安全规程 第1部分:总则
4	GB/T 5972 - 2009	起重机钢丝绳保养、维护、安装、检验和报废
5	GB/T 10051.1 ~ 15 - 2010	起重吊钩
6	JB/T 10219 - 2011	防爆梁式起重机

通用门式起重机 设计制造标准

Design and Manufacture Standards of General-Purpose Gantry Crane

1	GB/T 3811 - 2008	起重机设计规范
2	GB 6067.1 - 2010	起重机械安全规程 第1部分:总则
3	GB/T 14406 - 2011	通用门式起重机
4	GB/T 10183.1 - 2010	起重机、车轮及大车和小车轨道公差 第一部分:总则
5	GB/T 10051.1 ~ 15 - 2010	起重吊钩
6	JB/T 6128 - 2008	水电站门式起重机

门式起重机 检验、验收标准

Inspection and Acceptance Standards of Gantry Crane

1	GB/T 14406 - 2011	通用门式起重机
2	GB/T 5905 - 2011	起重机试验规范和程序
3	GB/T 10183.1 - 2010	起重机、车轮及大车和小车轨道公差 第一部分:总则
4	GB/T 10051.1 ~ 15 - 2010	起重吊钩
5	JB/T 6128 - 2008	水电站门式起重机

LH型电动葫芦桥式起重机 设计制造标准

Design and Manufacture Standards of LH type Overhead Crane with Electric Hoist

1	GB/T 3811 - 2008	起重机设计规范
2	JB/T 3695 - 2008	电动葫芦桥式起重机
3	GB 6067.1 - 2010	起重机械安全规程第1部分:总则

LH型电动葫芦桥式起重机 检验、验收标准

Inspection and Acceptance Standards of LH type Overhead Crane with Electric Hoist

1	GB 6067.1 - 2010	起重机械安全规程 第1部分:总则
2	GB/T 5905 - 2010	起重机试验规范和程序
3	GB/T 10183.1 - 2010	起重机、车轮及大车和小车轨道公差 第一部分:总则
4	JB/T 9008.1 ~ 9008.2 - 2004	钢丝绳电动葫芦
5	JB/T 3695 - 2008	电动葫芦桥式起重机

桥式起重机 设计制造标准

Design and Manufacture Standards of Overhead Crane

1	GB/T 3811 - 2008	起重机设计规范
2	GB 6067.1 - 2010	起重机械安全规程 第1部分:总则
3	GB/T 14405 - 2011	通用桥式起重机
4	GB/T 10183.1 - 2010	起重机、车轮及大车和小车轨道公差 第一部分:总则
5	JB/T 5897 - 2006	防爆桥式起重机
6	JB/T 8907 - 1999	绝缘桥式起重机技术条件

桥式起重机 检验、验收标准和规范

Inspection and Acceptance Standards of Overhead Crane

1	GB/T 5905 - 2011	起重机试验规范和程序
2	GB 6067.1 - 2010	起重机械安全规程 第1部分:总则
3	GB/T 5972 - 2009	起重机钢丝绳保养、维护、安装、检验和报废
4	GB/T 10051.1 ~ 15 - 2010	起重吊钩
5	GB/T 10183.1 - 2010	起重机、车轮及大车和小车轨道公差 第一部分:总则
6	GB/T 14405 - 2011	通用桥式起重机
7	JB/T 5897 - 2006	防爆桥式起重机
8	JB/T 8907 - 1999	绝缘桥式起重机技术条件
9	TSG Q0002 - 2008	起重机械安全技术监察规范 -- 桥式起重机

架桥机、冶金起重机 设计制造标准

Design and Manufacture Standards of Girder-Erecting Machine and Metallurgical Crane

1	GB/T 3811 - 2008	起重机设计规范
2	GB/T 26470 - 2011	架桥机通用技术条件
3	GB 6067.1 - 2010	起重机械安全规程 第1部分:总则
4	JB/T 7688.1 - 2008	冶金起重机技术条件 第1部分通用要求
5	JB/T 7688.14 - 1999	冶金起重机技术条件板坯搬运起重机
6	JB/T 7688.5 - 2012	冶金起重机技术条件铸造起重机

架桥机、冶金起重机 检验、验收标准

Inspection and Acceptance Standards of Girder-Erecting Machine and Metallurgical Crane

1	GB/T 5905 - 2011	起重机试验规范和程序
2	GB 6067.1 - 2010	起重机械安全规程 第1部分:总则
3	GB/T 26470 - 2011	架桥机通用技术条件
4	JB/T 7688.1 - 2008	冶金起重机技术条件 第1部分通用要求
5	JB/T 7688.14 - 1999	冶金起重机技术条件板坯搬运起重机
6	JB/T 7688.5 - 2012	冶金起重机技术条件铸造起重机

CONTENTS 目录

桥机类
OVERHEAD CRANE

QD型5～800/150t吊钩桥式起重机 ---- P.02
QD OVERHEAD CRANE WITH HOOK CAP.5-800/150T

QZ型5~20t抓斗桥式起重机 ---- P.18
QZ OVERHEAD CRANE WITH GRAB CAP.5-20T

YZ型5~320t吊钩桥式铸造起重机 ---- P.21
YZ FOUNDRY CRANE CAP. 5-320T

5-400t新型吊钩桥式起重机 ---- P.33
5~400T NEW-TYPE OVERHEAD CRANE WITH HOOK

电厂用低净空桥式起重机 ---- P.41
LOW CLEARANCE OVERHEAD CRANE FOR POWER STATION

QY型5~50/10t绝缘吊钩桥式起重机 ---- P.42
QY INSULATING OVERHEAD CRANE WITH HOOK CAP.5-50/10T

QB型5～100/30t防爆吊钩桥式起重机 ---- P.49
QB OVERHEAD EXPLOSION-PROOF CRANE WITH HOOK CAP.5-100/30T

本样本所供参数仅供选型参考，如有更改恕不通知，具体型号参数以本公司实际产品设计为准，欢迎咨询。

The parameters provided in this sample are only for model selection reference, and are subject to change without notice.
The specific model parameters are subject to the actual product design of our company.
Welcome to consult.

制造业单项冠军示范企业

QC型5~50/10t电磁桥式起重机 ····· P.58
QC OVERHEAD CRANE WITH MAGNET CAP. 5-50/10T

挂梁桥式起重机 ····· P.62
OVERHEAD CRANE WITH CARRIER-BEAM


超长电磁挂梁桥式起重机 ····· P.83
OVER LENGTH ELECTROMAGNETIC OVERHEAD CRANE WITH CARRIER-BEAM

35~65t夹钳桥式起重机 ····· P.87
OVERHEAD CRANE WITH TONGS CAP.35-65T

垃圾抓斗起重机 ····· P.90
GRAB CRANE FOR GARBAGE

钢管智能分配起重机 ····· P.92
INTELLIGENT STEEL TUBE ALLOCATION CRANE

智能冶金上料桥式起重机 ····· P.94
INTELLIGENT METALLURGICAL FEEDING CRANE

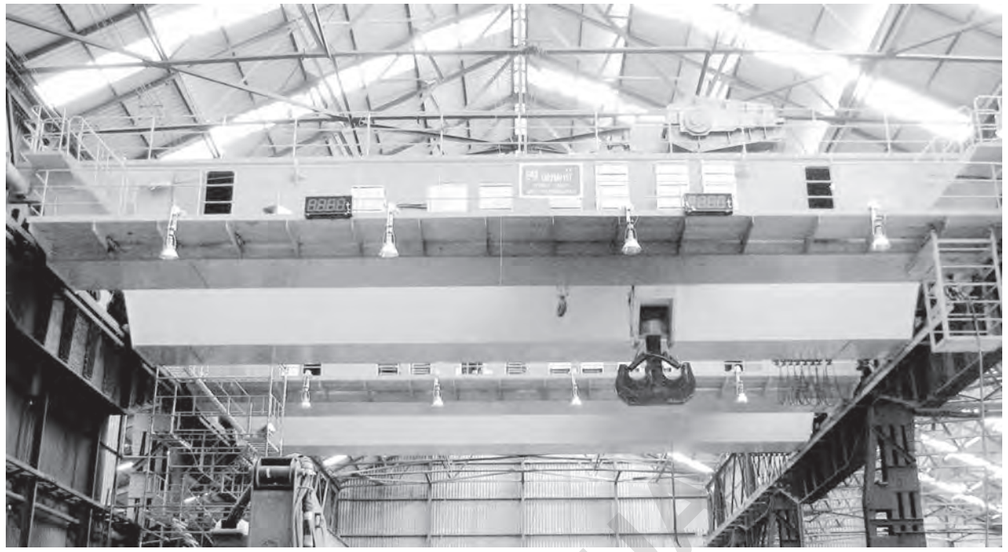

QD型5～800/150t吊钩桥式起重机
QD OVERHEAD CRANE WITH HOOK CAP.5-800/150T

产品概述：


1、QD型吊钩桥式起重机，主要应用于各种室内车间。根据利用等级和载荷状态不同，分为A5，A6二种工作级别。
2、司机室平台入口方向分为侧面入口、端面入口和顶面入口三种。
3、司机室可以左端安装也可以右端安装。
4、大车导电可以用安全滑触线也可以用角钢。既可以在司机室对侧，也可以在司机室同侧。
5、该起重机的动作操作全部在司机室内完成。

Product Introduction:

1. QD model overhead crane with hook is mainly used in inside workshop. It is divided into two working classes: A5 and A6 according to the use grade and load-up condition.
2. There are three kinds of method for entering the platform of cab from the side, from the end and from the top.
3. The cab can be either fixed at the left end or at the right end.
4. Safe slide wire or angle iron can be used for electric conduction of the crane; it can be either at the opposite side of the cab or at the same-side of the cab.
5. Operation of the crane shall be finished in cab completely.

QD型5t吊钩桥式起重机

QD overhead Crane with Hook Cap. 5t

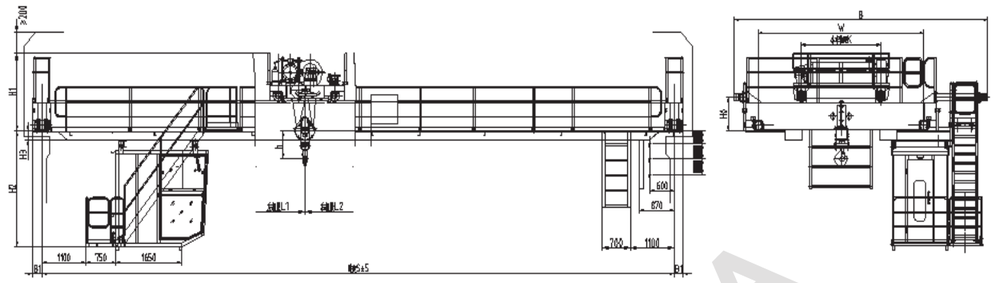

技术规格　Technical Specifications

起重量 Cap	主钩Main	t	5								5						
	副钩Aux		——								——						
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			16								16						
			——								——						
工作制度Duty			A5								A6						
速度 Speed	主钩Main	m/min	12.5								15.5						
	副钩Aux		——								——						
	小车运行 Crab Travelling		37.2								37.2						
	大车运行 Crane Travelling		68.3			70.4					68.3			71.1		88.9		
极限尺寸 Limit Dimension	L1	mm	800								800						
	L2		1250								1250						
	L		——								——						
	h		120								120						
	h1		——								——						
主要尺寸 Main Dimension	H0	mm	770			765					770			765				
	H1		1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
	H2		2501	2501	2601	2656	2706	2808	2908	3008	2501	2501	2601	2656	2706	2808	2908	3008
	H3		71	71	171	226	276	378	478	578	71	71	171	226	276	378	478	578
	B		5734			5894		6389			5734			5894		6389		
	K		1400								1400							
	B1		230								230							
	W		3550				4500				3550					4500		
最大轮压 Max.Wheel Loading		KN	64	67	71.5	76	80.5	88	95	101.5	65.5	67.5	72	76.5	81	89	96	102
电机总功率 Power		KW	22.8								24.2					27.8		
荐用钢轨 Crane Rail Recommended			43kg/m								43kg/m							
电源 Power Supply			三相交流　50Hz　380V								三相交流　50Hz　380V							


备注：

1、表中速度为公称速度，电机、减速器厂家不同有适当差异。

2、表中吊钩中心高h值为负值时表示在大车轨道面以下。

QD型10t吊钩桥式起重机

QD overhead Crane with Hook Cap. 10t

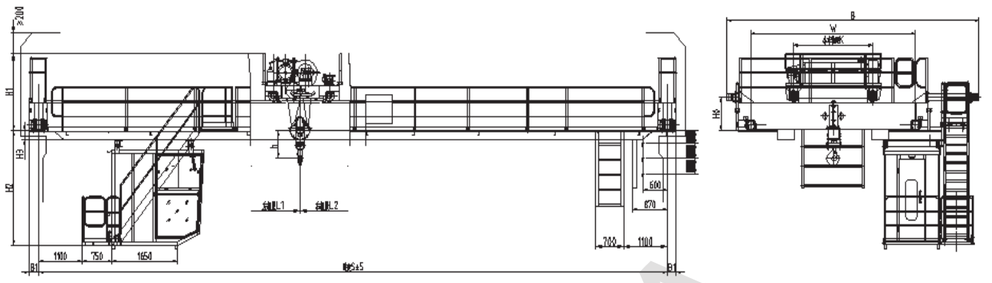

技术规格　Technical Specifications

起重量 Cap	主钩Main	t	10								10						
	副钩Aux		——								——						
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			16								16						
			——								——						
工作制度Duty			A5								A6						
速度 Speed	主钩Main	m/min	8.5								13.2						
	副钩Aux		——								——						
	小车运行 Crab Travelling		37.2								37.2						
	大车运行 Crane Travelling		70.4			71.8		73.4			71.1			74.2		74.2		
极限尺寸 Limit Dimension	L1	mm	1050								1050							
	L2		1300								1300							
	L		——								——							
	h		655								655							
	h1		——								——							
主要尺寸 Main Dimension	H0	mm	765								765							
	H1		1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
	H2		2506	2556	2656	2706	2856	2910	2910	3010	2506	2556	2656	2706	2856	2910	2910	3010
	H3		76	126	226	276	426	480	480	580	76	126	226	276	426	480	480	580
	B		6460			6520		6715			6460			6520		6715		
	K		2000								2000							
	B1		230								230							
	W		4200					4500			4200					4500		
最大轮压 Max.Wheel Loading		KN	91	96	100	106	111	120	127	133	92	97	101	107	113	122	128	135
电机总功率 Power		KW	26.8					31.4			31.2			34.8				
荐用钢轨 Crane Rail Recommended			43kg/m								43kg/m							
电源 Power Supply			三相交流　50Hz　380V								三相交流　50Hz　380V							


备注：

1、表中速度为公称速度，电机、减速器厂家不同有适当差异。

2、表中吊钩中心高h值为负值时表示在大车轨道面以下。

QD型16/3.2t吊钩桥式起重机

QD overhead Crane with Hook Cap. 16/3. 2t

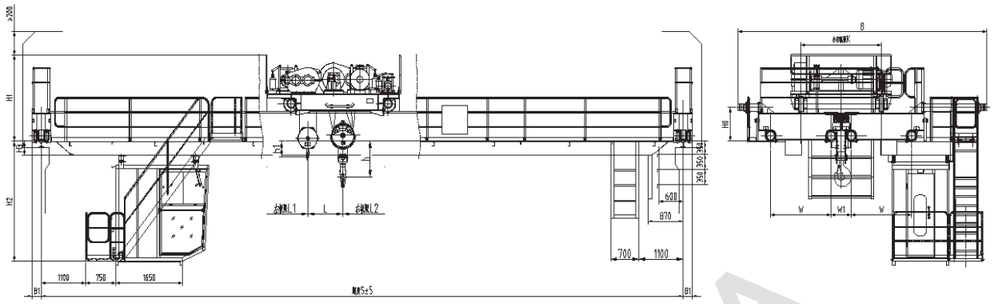

技术规格　Technical Specifications

起重量 Cap	主钩Main	t	16								16							
	副钩Aux		3.2								3.2							
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			17								17							
			19								19							
工作制度Duty			A5								A6							
速度 Speed	主钩Main	m/min	7.9								10.8							
	副钩Aux		11.2								11.2							
	小车运行 Crab Travelling		40								40							
	大车运行 Crane Travelling		70			72			72.8		70			72			73	
极限尺寸 Limit Dimension	L1	mm	1040								1040							
	L2		1560								1560							
	L		810								810							
	h		850			800					850			800				
	h1		73			21					73			21				
主要尺寸 Main Dimension	H0	mm	770			820					770			820				
	H1		2000			2050					2000			2050				
	H2		2551	2655	2755	2855	2955	2957	3057	3157	2551	2655	2805	2855	3005	3007	3107	3257
	H3		121	225	325	425	525	527	627	727	121	225	375	425	575	577	677	827
	B		6498					6660	6740		6498					6660	6740	
	K		2000								2000							
	B1		230								230							
	W		1500					1500			1500					1500		
	W1		500					660			500					660		
最大轮压 Max.Wheel Loading		KN	71	74	78	83	86	90	93	97	71	75	79	83	87	91	95	99
电机总功率 Power		KW	48.9					53.3			51.3					55.3		
荐用钢轨 Crane Rail Recommended			43kg/m								43kg/m							
电源 Power Supply			三相交流　50Hz　380V								三相交流　50Hz　380V							


备注：

1、表中速度为公称速度，电机、减速器厂家不同有适当差异。

2、表中吊钩中心高h值为负值时表示在大车轨道面以下。

QD型20/5t吊钩桥式起重机

QD overhead Crane with Hook Cap. 20/5t

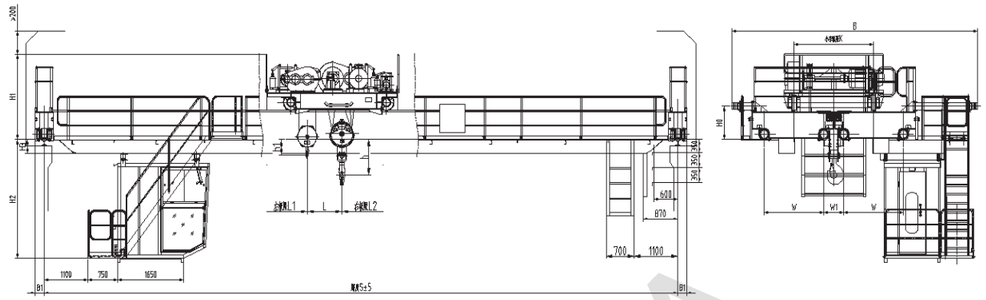

技术规格　Technical Specifications

起重量 Cap	主钩Main	t	20								20							
	副钩Aux		5								5							
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			12								12							
			14								14							
工作制度Duty			A5								A6							
速度 Speed	主钩Main	m/min	7.2								9.7							
	副钩Aux		12.7								12.7							
	小车运行 Crab Travelling		40								40							
	大车运行 Crane Travelling		70			72			73		71.3			73.6			73.6	
极限尺寸 Limit Dimension	L1	mm	1030								1030							
	L2		1500								1500							
	L		900								900							
	h		820			770					820			770				
	h1		321			271					321			271				
主要尺寸 Main Dimension	H0	mm	770			820					770			820				
	H1		2000			2050					2000			2050				
	H2		2551	2655	2755	2855	2955	3007	3057	3207	2551	2655	2855	2905	3005	3057	3107	3257
	H3		123	225	325	425	525	577	627	777	123	225	375	475	575	627	677	827
	B		6498					6660	6740		6498					6660	6740	
	K		2000								2000							
	B1		230								230							
	W		1500					1500			1500					1500		
	W1		500					660			500					660		
最大轮压 Max.Wheel Loading		KN	80	84	89	93	99	101	106	110	81	85	89	94	99	103	107	112
电机总功率 Power		KW	55.6					60			65			69		69		
荐用钢轨 Crane Rail Recommended			43kg/m								43kg/m							
电源 Power Supply			三相交流　50Hz　380V								三相交流　50Hz　380V							

备注：


1、表中速度为公称速度，电机、减速器厂家不同有适当差异。

2、表中吊钩中心高b值为负值时表示在大车轨道面以下。

WEIHUA

QD型32/5t吊钩桥式起重机

QD overhead Crane with Hook Cap. 32/5t

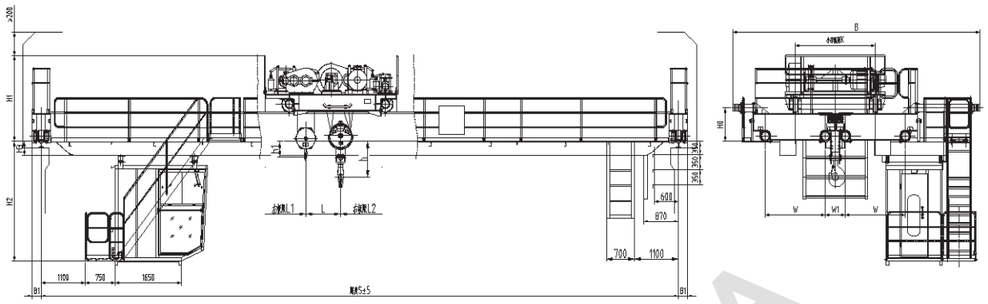

技术规格　Technical Specifications

起重量 Cap	主钩Main	t	32								32							
	副钩Aux		5								5							
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			14								14							
			16								16							
工作制度Duty			A5								A6							
速度 Speed	主钩Main	m/min	6								7.4							
	副钩Aux		12.5								12.5							
	小车运行 Crab Travelling		42.6								42.6							
	大车运行 Crane Travelling		74.2					75.1			75					75		
极限尺寸 Limit Dimension	L1	mm	1070								1070							
	L2		1700								1700							
	L		900								900							
	h		760			760					760			760				
	h1		46			46					46			46				
主要尺寸 Main Dimension	H0	mm	870			870					870			870				
	H1		2270			2270					2270			2270				
	H2		2605	2607	2807	2957	3107	3107	3407	3457	2605	2609	2809	2959	3109	3109	3409	3459
	H3		175	177	377	527	677	677	977	1027	175	179	379	529	679	679	979	1029
	B		7060					7395		7595	7060					7395		7595
	K		2500								2500							
	B1		230								230							
	W		1700					1900			1700					1900		
	W1		800					700			800					700		
最大轮压 Max.Wheel Loading		KN	111	117	122	127	132	137	143	148	111	118	123	129	134	140	145	151
电机总功率 Power		KW	71.3					80.3			79.3			86.3		86.3		
荐用钢轨 Crane Rail Recommended			QU70								QU80							
电源 Power Supply			三相交流　50Hz　380V								三相交流　50Hz　380V							


备注

1、表中速度为公称速度，电机、减速器厂家不同有适当差异。

2、表中吊钩中心高值为负值时表示在大车轨道面以下。

QD型50/10t吊钩桥式起重机

QD overhead Crane with Hook Cap. 50/10t

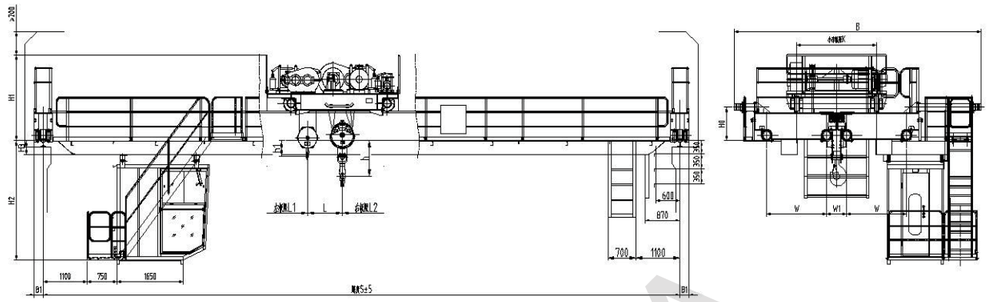

技术规格　Technical Specifications

起重量 Cap	主钩Main	t	50								50							
	副钩Aux		10								10							
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			12								12							
			16								16							
工作制度Duty			A5								A6							
速度 Speed	主钩Main	m/min	5								6.1							
	副钩Aux		8.5								8.5							
	小车运行 Crab Travelling		38.5								38.5							
	大车运行 Crane Travelling		75			75		72			75			75			74	
极限尺寸 Limit Dimension	L1	mm	1030								1030							
	L2		1720								1720							
	L		1180								1180							
	h		1280					1180			1280					1180		
	h1		330					230			330					230		
主要尺寸 Main Dimension	H0	mm	875			910		1010			875			910		1010		
	H1		2350					2450			2350					2450		
	H2		2606	2756	2908	3058	3108	3110	3310	3360	2606	2758	2910	3060	3110	3112	3312	3362
	H3		176	326	478	628	678	680	880	930	176	328	480	630	680	682	882	932
	B		7030			7295		7395		7575	7165			7295		7545		7730
	K		2500								2500							
	B1		230								230							
	W		1700					1900			1700					1900		
	W1		860					740			860					740		
最大轮压 Max.Wheel Loading		KN	159	167	175	182	189	197	204	211	160	169	176	184	191	207	207	215
电机总功率 Power		KW	93.5					93.5			102.5					110.5		
荐用钢轨 Crane Rail Recommended			QU70								QU80							
电源 Power Supply			三相交流　50Hz　380V								三相交流　50Hz　380V							


备注：

1、表中速度为公称速度，电机、减速器厂家不同有适当差异。

2、表中吊钩中心高值为负值时表示在大车轨道面以下。

QD型75/20t吊钩桥式起重机

QD overhead Crane with Hook Cap. 75/20t

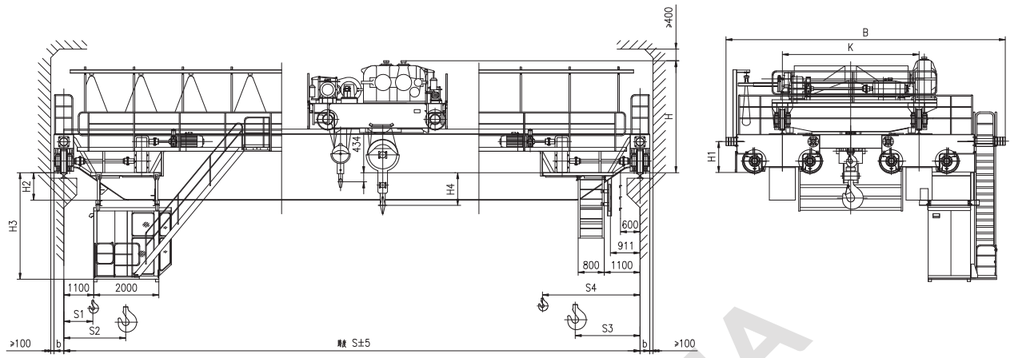


技术规格 Technical Specifications

起重量 Lifting Capacity			t														
	主钩	Main		75													
	副钩	Aux.		20													
跨度 Span			m	13.5	16.5	19.5	22.5	25.5	28.5	31.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height	主钩	Main		20													
	副钩	Aux.		22													
工作制度 Duty				A5							A6						
速度 Speed	主起升	Main	m/min	3.8							5						
	副起升	Aux		7.2													
	小车运行	Crab travelling		38.4													
	大车运行	Crane travelling		53.9							77.8					67	
极限尺寸 limit dimension	S1			1015													
	S2			3260													
	S3			2475													
	S4			3720													
主要尺寸 main dimension	H		mm	3302		3302	3306	3304	3308	3310	3302		3304	3308	3306	3310	3312
	H1			950													
	H2			290	440	542	546	844	844	850	292	442	544	548	846	850	852
	H3			2710	2860	2962	2966	3264	3268	3270	2712	2862	2964	2968	3266	3270	3272
	H4			872		872	868	870	866	864	870		868	864	866	862	860
	K			4400													
	B			8828													
	b			300													
最大轮压 Max.Wheel Loading			kN	255	268	278	290	302	309	310	257	271	282	294	303	314	322
电机总功率 Total Power			kw	128				136			158						
荐用钢轨 Crane Rail Recommended				QU100													
电源 Power Supply				三相交流 3—Phase A.C.50Hz 380V													

QD型100/20t吊钩桥式起重机

QD overhead Crane with Hook Cap. 100/20t

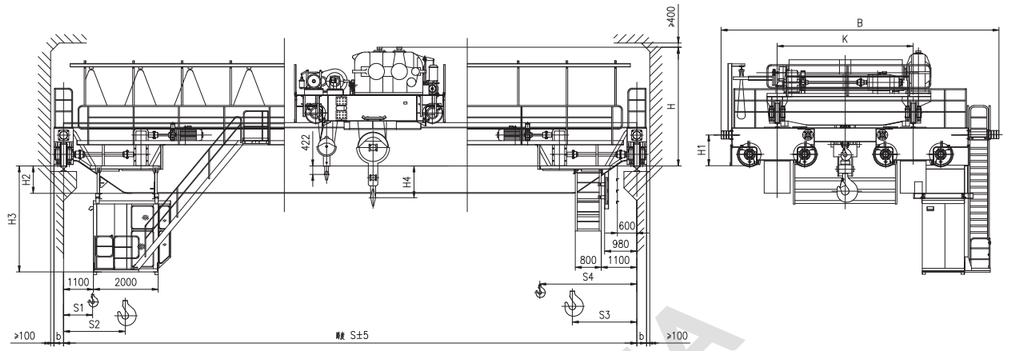


技术规格 Technical Specifications

起重量 Lifting Capacity			t												
	主钩	Main		100											
	副钩	Aux.		20											
跨度 Span			m	13	16	19	22	25	28	31	13	16	19	22	25	28	31
起升高度 Lifting Height	主钩	Main		18							18						
	副钩	Aux.		20							20						
工作制度 Duty				A5							A6						
速度 Speed	主起升	Main	m/min	3.1							3.9						
	副起升	Aux		7.2													
	小车运行	Crab travelling		33.9													
	大车运行	Crane travelling		61.7			61.7				61.8						
极限尺寸 limit dimension	S1			985													
	S2			2300													
	S3			2650													
	S4			3965													
主要尺寸 main dimension	H		mm	3434	3434	3436	3442	3442	3444	3446	3434	3436	3438	3444	3444	3446	3448
	H1			950													
	H2			538	540	542	548	848	850	952	540	542	544	550	850	852	954
	H3			2958	2960	2962	2968	3268	3270	3372	2960	2962	2964	2970	3270	3272	3374
	H4			1330	1330	1328	1322	1322	1320	1318	1330	1328	1326	1320	1320	1318	1316
	K			4400													
	B			8868													
	b			310													
最大轮压 Max.Wheel Loading			kN	320	335	350	365	376	386	397	321	338	350	367	380	390	400
电机总功率 Total Power			kw	136			154				158			174			
荐用钢轨 Crane Rail Recommended				QU100													
电源 Power Supply				三相交流 3—Phase A.C.50Hz 380V													

WEIHUA

QD型125/32t吊钩桥式起重机

QD overhead Crane with Hook Cap. 125/32t

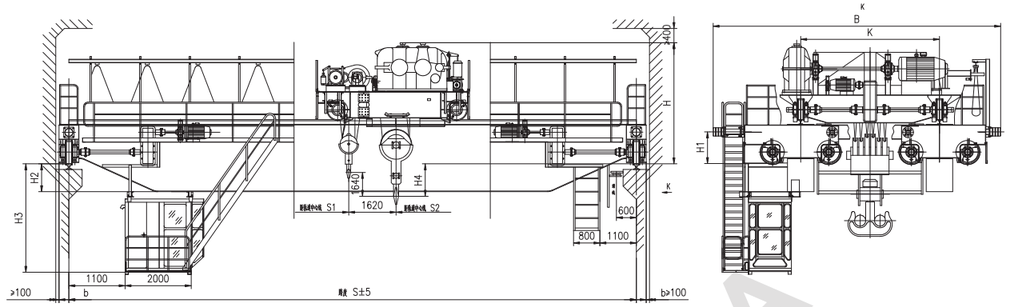


技术规格　Technical Specifications

起重量 Lifting Capacity	主钩 Main	t	125													
	副钩 Aux.		32													
跨度 Span		m	13	16	19	22	25	28	31	13	16	19	22	25	28	31
起升高度 Lifting Height	主钩 Main		18													
	副钩 Aux.		20													
工作制度 Duty			A5							A6						
速度 Speed	主起升 Main	m/min	3.5							3.6						
	副起升 Aux		7.5													
	小车运行 Crab travelling		33													
	大车运行 Crane travelling		59.56			59.2				59.7			67			
极限尺寸 limit dimension	S1	mm	1200													
	S2		2500													
主要尺寸 main dimension	H		3676	3676	3680	3682	3686	3686	3688	3676	3678	3682	3684	3688	3688	3689
	H1		950													
	H2		540	542	846	848	852	1052	1254	542	544	848	850	854	1054	1255
	H3		2960	2962	3266	3268	3272	3472	3674	2962	2964	3268	3270	3274	3474	3675
	H4		1560	1560	1556	1554	1556	1550	1548	1560	1588	1554	1552	1548	1548	1547
	K		4400													
	B		8868				9008			8868				9008		
	b		310													
最大轮压 Max.Wheel Loading		kN	388	408	430	445	459	470	492	390	410	432	445	462	476	489
电机总功率 Total Power		kw	179.5			197.5				194.5			210.5			
荐用钢轨 Crane Rail Recommended			QU100													
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V													

QD型150/32~160/32t吊钩桥式起重机

QD overhead Crane with Hook Cap. 150/32-160/32t

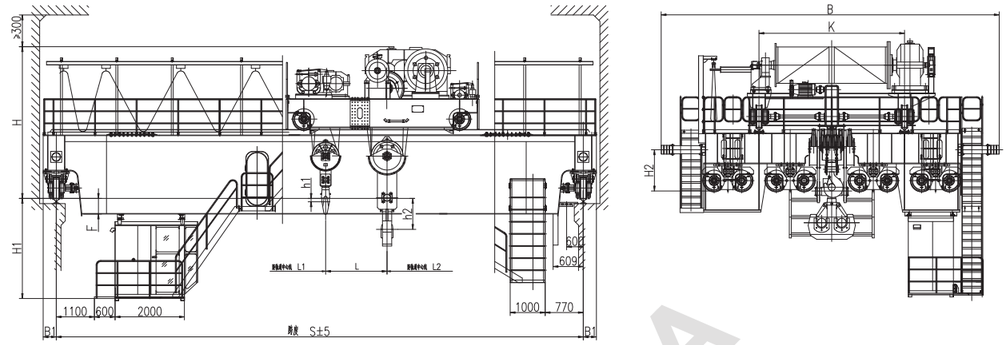


技术规格　Technical Specifications

起重量 Lifting Capacity	主钩 Main	t	150							160						
	副钩 Aux.		32							32						
跨度 Span		m	13	16	19	22	25	28	31	13	16	19	22	25	28	31
起升高度 Lifting Height			22							20						
			24							22						
工作制度 Duty			A5							A5						
速度 Speed	主钩 Main	m/min	3.7							3.2						
	副钩 Aux.		7.5							5.9						
	小车运行 Crab travelling		40							22.5						
	大车运行 Crane travelling		68							57						
极限尺寸 limit dimension	L1	mm	980							1392						
	L2		2500							2727						
	L		1700							1825						
	h2		1200							535			533			
	h1		50							240			238			
主要尺寸 main dimension	H	mm	4600							4496			4498			
	H1		3000					3150		2857			2957			
	B		9900							9900						
	K		4600							4400						
	B1		400							385						
	F		500					650		437					537	
最大轮压 Max.Wheel Loading		kN	262	283	294	304	312	319	326	272	293	300	315	324	331	338
电机总功率 Total Power		kw	196	196	208	208	216	216	216	232				260		
荐用钢轨 Crane Rail Recommended			QU120							QU120						
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V							三相交流 3—Phase A.C.50Hz 380V						

WEIHUA

QD型200/50~250/50t吊钩桥式起重机

QD overhead Crane with Hook Cap. 200/50-250/50t

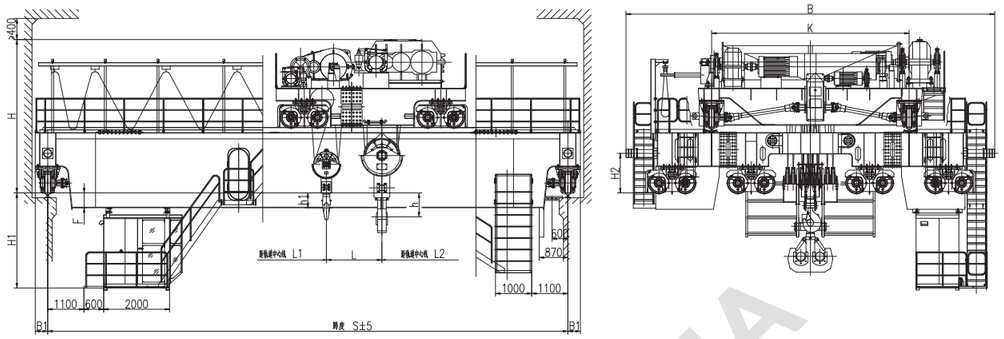


技术规格 Technical Specifications

起重量 Lifting Capacity	主钩 Main	t	200							250						
	副钩 Aux.		50							50						
跨度 Span		m	13	16	19	22	25	28	31	13	16	19	22	25	28	31
起升高度 Lifting Height			20							20						
			22							22						
工作制度 Duty			A5							A5						
速度 Speed	主钩 Main	m/min	2.6							2.2						
	副钩 Aux.		7.7							7.7						
	小车运行 Crab travelling		32							32						
	大车运行 Crane travelling		48							50						
极限尺寸 limit dimension	L1	mm	1600							1600						
	L2		2800							3100						
	L		2000							2000						
	h		1500							1800						
	h1		700							1000						
主要尺寸 main dimension	H	mm	5300							5300						
	H1		2740				2890			3150				3300		
	B		11200							12000						
	K		5000							6000						
	B1		400							450						
	F		320					470		650					800	
最大轮压 Max.Wheel Loading		kN	326	344	358	372	390	400	410	356	370	380	408	430	440	450
电机总功率 Total Power		kw	239	239	263	263	263	279	279	239	239	263	263	263	279	279
荐用钢轨 Crane Rail Recommended			QU120							QU120						
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V							三相交流 3-Phase A.C.50Hz 380V						

QD型300/75~350/80t吊钩桥式起重机

QD overhead Crane with Hook Cap. 300/75-350/80t

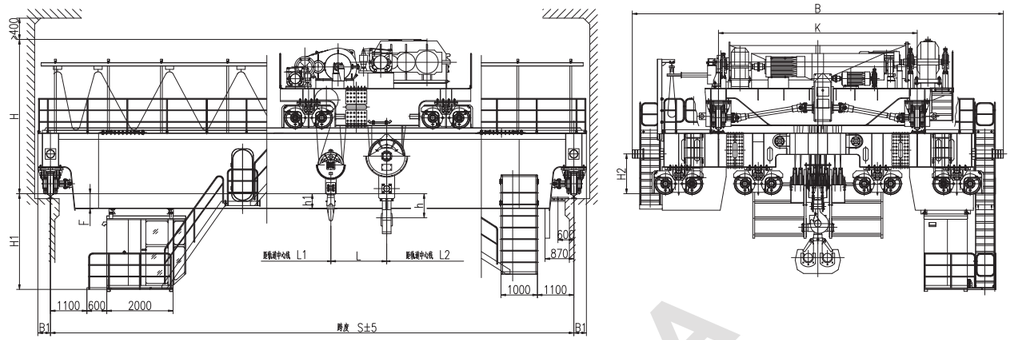


技术规格 Technical Specifications

起重量 Lifting Capacity	主钩 Main	t	300							350						
	副钩 Aux.		75							80						
跨度 Span		m	13	16	19	22	25	28	31	13	16	19	22	25	28	31
起升高度 Lifting Height			24							24						
			26							26						
工作制度 Duty			A5							A5						
速度 Speed	主钩 Main	m/min	2.4							2.2						
	副钩 Aux.		6.8							6.8						
	小车运行 Crab travelling		28							28						
	大车运行 Crane travelling		42							42						
极限尺寸 limit dimension	L1	mm	1700							1500						
	L2		3500							2800						
	L		2450							2400						
	h		1900							1500						
	h1		520							520						
主要尺寸 main dimension	H	mm	5850							5850						
	H1		3000					3200		3000					3200	
	B		12100							12300						
	K		6000							6200						
	B1		450							450						
	F		500					700		500					700	
最大轮压 Max.Wheel Loading		kN	480	495	510	525	540	550	565	507	534	555	571	586	599	613
电机总功率 Total Power		kw	485	485	501	501	537	537	537	485	485	501	501	537	537	537
荐用钢轨 Crane Rail Recommended			QU120							QU120						
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V							三相交流 3-Phase A.C.50Hz 380V						

WEIHUA

QD型400/80~450/100t吊钩桥式起重机

QD overhead Crane with Hook Cap. 400/80-450/100t

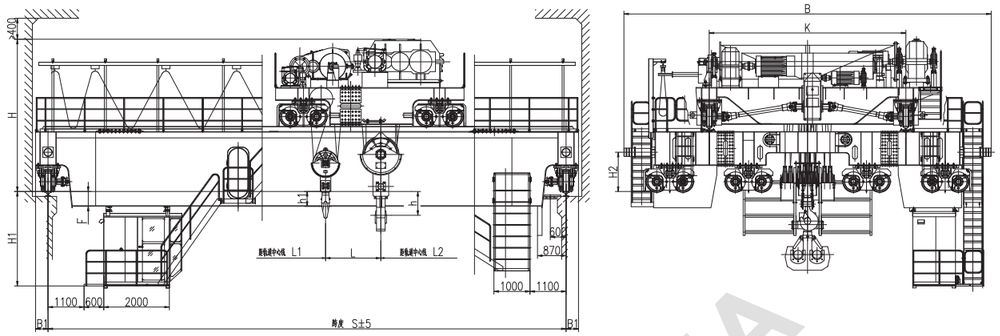


技术规格 Technical Specifications

起重量 Lifting Capacity	主钩 Main	t	400							450						
	副钩 Aux.		80							100						
跨度 Span		m	13	16	19	22	25	28	31	13	16	19	22	25	28	31
起升高度 Lifting Height			23							24						
			25							26						
工作制度 Duty			A5							A5						
速度 Speed	主钩 Main	m/min	2.6							2.1						
	副钩 Aux.		5.1							4.7						
	小车运行 Crab travelling		31							27						
	大车运行 Crane travelling		45							42						
极限尺寸 limit dimension	L1	mm	1600							1600						
	L2		3400							3400						
	L		3000							3000						
	h		1800							1800						
	h1		520							750						
主要尺寸 main dimension	H		6500							6500						
	H1		3500					3700		3500					3700	
	B		12300							13500						
	K		6000							6500						
	B1		450							450						
	F		1000					1200		1000					1200	
最大轮压 Max.Wheel Loading		kN	620	650	680	700	720	735	755	651	688	718	739	758	777	791
电机总功率 Total Power		kw	608	608	624	624	640	640	640	608	608	624	624	640	640	640
荐用钢轨 Crane Rail Recommended			QU120							QU120						
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V							三相交流 3-Phase A.C.50Hz 380V						

QD型500/100~550/100t吊钩桥式起重机

QD overhead Crane with Hook Cap. 500/100-550/100t

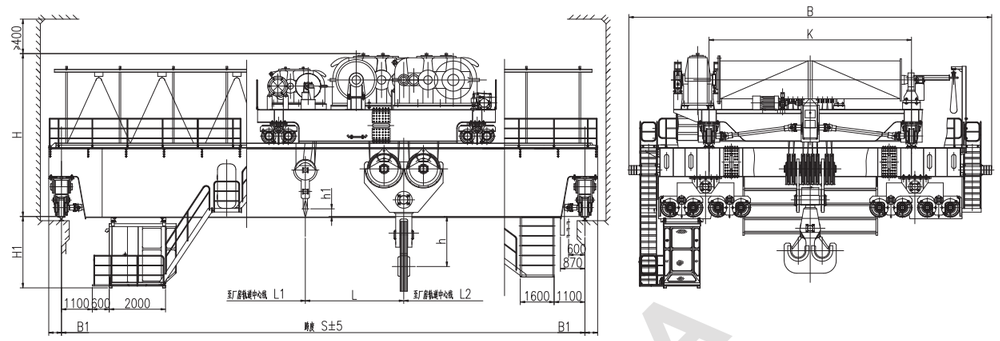


技术规格 Technical Specifications


起重量 Lifting Capacity	主钩 Main	t	500							550						
	副钩 Aux.		100							100						
跨度 Span		m	13	16	19	22	25	28	31	13	16	19	22	25	28	31
起升高度 Lifting Height			20							22						
			22							24						
工作制度 Duty			A5							A5						
速度 Speed	主钩 Main	m/min	2							1.8						
	副钩 Aux.		4.7							4.7						
	小车运行 Crab travelling		26							26						
	大车运行 Crane travelling		38							38						
极限尺寸 limit dimension	L1	mm	1700							1700						
	L2		3500							3500						
	L		3200							3200						
	h		1600							1600						
	h1		750							750						
主要尺寸 main dimension	H		6800							6800						
	H1		3000					3200		3000					3200	
	B		14400							14500						
	K		6500							6500						
	B1		450							450						
	F		500					700		500					700	
最大轮压 Max.Wheel Loading		kN	741	792	830	860	886	908	928	814	871	912	945	973	996	1012
电机总功率 Total Power		kw	699	699	715	715	735	735	735	734	734	742	742	762	762	762
荐用钢轨 Crane Rail Recommended			QU120							QU120						
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V							三相交流 3-Phase A.C.50Hz 380V						

WEIHUA

QD型600/150~800/150t吊钩桥式起重机


QD overhead Crane with Hook Cap. 600/150-800/150t

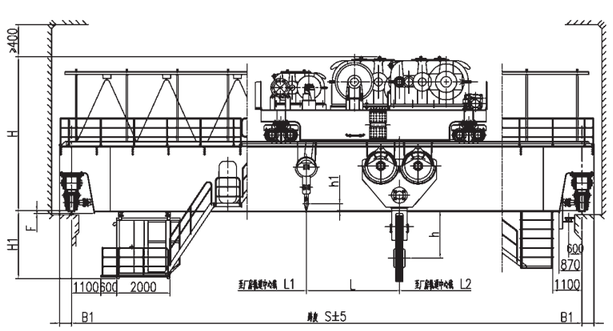


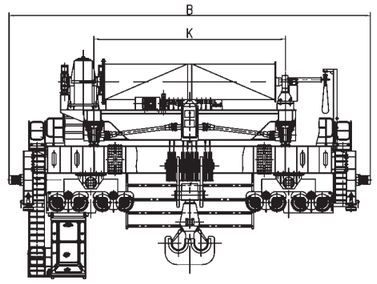

技术规格 Technical Specifications

起重量 Lifting Capacity	主钩 Main	t	600	800
	副钩 Aux.		150	150
跨度 Span		m	34	34
起升高度 Lifting Height			24	26
			26	28
工作制度 Duty			A5	A5
速度 Speed	主钩 Main	m/min	0.17~1.7	0.15~1.5
	副钩 Aux.		0.41~4.1	0.41~4.1
	小车运行 Crab travelling		1.5~15	1.3~13
	大车运行 Crane travelling		3.6~36	3.1~31
极限尺寸 limit dimension	L1	mm	1600	1900
	L2		3600	4000
	L		2850	3050
	h		1200	1300
	h1		770	1270
主要尺寸 main dimension	H	mm	6300	7350
	H1		3050	3220
	B		12000	13900
	K		5600	6800
	B1		500	550
	F		580	780
最大轮压 Max.Wheel Loading		kN	980	840
电机总功率 Total Power		kw	466	588
荐用钢轨 Crane Rail Recommended			QU120	QU120
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V	三相交流 3—Phase A.C.50Hz 380V

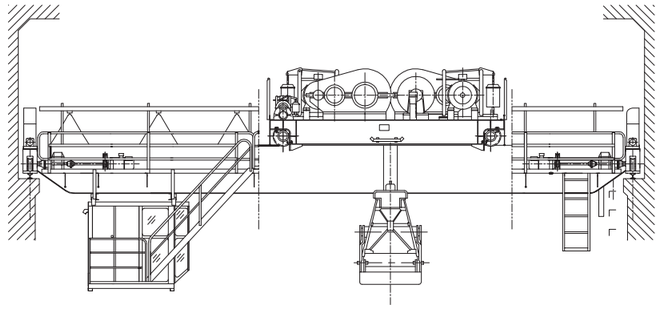



QZ型5~20t抓斗桥式起重机

QZ OVERHEAD CRANE WITH GRAB CAP.5-20T

产品概述:

QZ型抓斗桥式起重机广泛适用于电厂、货场、车间、码头等，进行散料的装卸运输。
本起重机均为重级工作制，工作级别为A6。
进入司机室的走台入口方式分为：端入、侧入、顶入。
额定起重量包含抓斗自重。
抓斗张开方向有平行和垂直主梁两种，图示为抓斗垂直主梁张开。
取物装置为双卷筒的四绳抓斗，结构简单，工作可靠。抓斗可在任意高度张开和闭合。
抓斗只适用于自然堆积状态下的散粒物料，当抓取水下物料或特殊物料时须在订货时特别提出。
本起重机可在室内也可在室外使用，室外使用时增加防雨罩装置。


Product Introduction:

QZ Overhead crane with grab is widely used in loading goods in port, factory, workshop and power plant.
The work classification is heavy. the group classification of the crane is A6.
The direction of platform door to the driver's cap is: side, end and top. The lifting capacity includes the weight of the grad.
The open direction of the grap is: paralleling eith the beam and plumbing with the beam, this design is the plumbing type. The gripping device is a double-drum four-rope grab with simple structure and reliable operation. The grab can be opened and closed at any height. It is only suitable for bulk materials in natural stacking conditions. If grabbing the materials under the water or special materials, they must be specialized when ordering.
This crane can be used indoors or outdoors, and the rain cover device is added when used outdoors.

WEIHUA

QZ型5~10t抓斗桥式起重机

QZ Overhead crane with grab cap. 5-10t

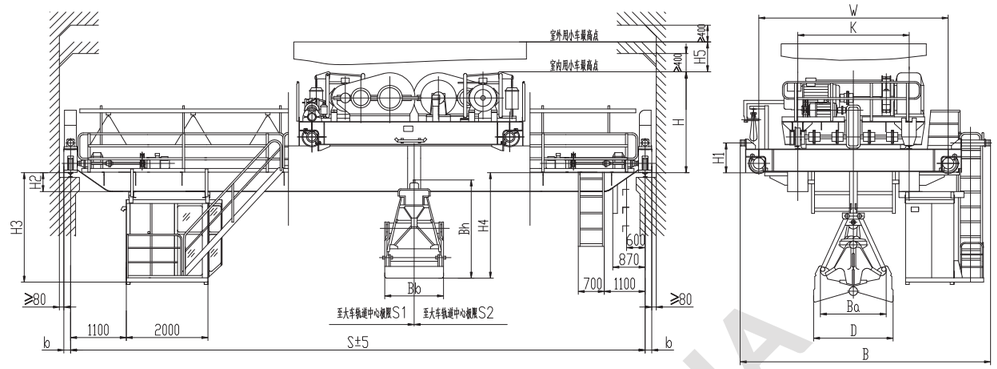


技术规格　Technical Specifications

起重量 Lifting capacity		t	5t								10t							
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height		m	20								18							
工作制度 Duty			A6								A6							
速度 Speed	起升 Hoisting	m/min	39.2								39.3							
	小车运行 Crab travelling		44.6								45.9							
	大车运行 Crane travelling		93.6					113.6			112.5				101			
极限尺寸 limit dimension	S1	mm	1635								2015							
	S2		1635								1850							
主要尺寸 main dimension	B		6568			6638		7163			6913			6963		7388	7413	
	W		4000			4050		5000			4000			4100		5000		
	K		2000								2000							
	H		1876					1926			2078			2168				
	H1		765					850			815			940				
	H2		128	228	328	478	628	728	878	1028	180	230	380	390	540	690	840	940
	H3		2548	2648	2748	2898	3048	3148	3298	3448	2600	2650	2800	2810	2960	3110	3260	3360
	H4		3063	3163	3263	3413	3563	3663	3813	3963	3927	3977	4127	4137	4287	4437	4587	4687
	H5		850								700							
	b		230								230			260				
最大轮压 Max.Wheel Loading		kN	75	80	87	95	102	113	122	130	113	121	131	142	152	162	172	180
荐用钢轨 Crane Rail Recommended			荐用43Kg/m或QU70								荐用43Kg/m或QU70							
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V								三相交流 3-Phase A.C.50Hz 380V							

抓斗 Grab	型 号	U	113	109	110	105	106	101	102	127	123	124	119	120	115	116
	类 型		轻型	中型		重型		超重型		轻型	中型		重型		超重型	
	容 积	m^3	2.5	1.5		1		0.75		5	3		2		1.5	
	物 料 密 度	t/m^3	≤1	>1~1.7		>1.7~2.5		>2.5~3.3		≤1	>1~1.7		>1.7~2.5		>2.5~3.3	
	自 重	Kg	2633	2549	2615	2506	2568	2479	2546	4800	4803	4866	4850	4913	4730	4793
	主要尺寸 main dimension D		3120	2740	2740	2530	2530	2340	2340	3900	3430	3430	3220	3220	2920	2920
	Ba		2200	1950	1950	1800	1800	1650	1650	2700	2400	2400	2200	2200	1960	1960
	Bb		1500	1354	1354	1238	1238	1160	1160	2060	1754	1754	1528	1528	1416	1416
	Bh		3135	2935	2935	2835	2835	2735	2735	3990	3747	3747	3640	3640	3490	3490

QZ型16~20t抓斗桥式起重机


QZ Overhead crane with grab cap. 16-20t

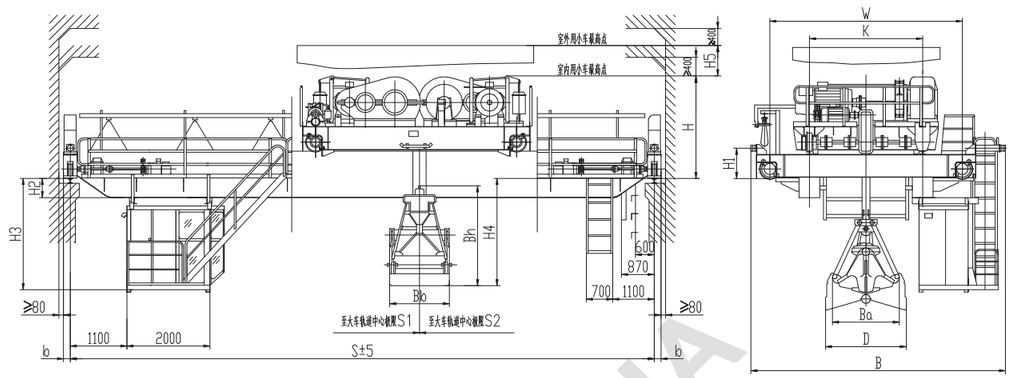

技术规格　Technical Specifications

起重量 Lifting capacity		t	16t						20t					
跨度 Span		m	16.5	19.5	22.5	25.5	28.5	31.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height		m	28						26					
工作制度 Duty			A6						A6					
速度 Speed	起升 Hoisting	m/min	41.8						45.7					
	小车运行 Crab travelling		43.2						43.2					
	大车运行 Crane travelling		98		87.3				87.3					
极限尺寸 limit dimension	S1	mm	2305						2635					
	S2		2060						2485					
主要尺寸 main dimension	B		7583		7733		7833		7958		8058			
	W		4800			5000			4800			5000		
	K		2500						2500					
	H		2385		2535				2739					
	H1		940		1090				1090					
	H2		394	544	544	694	794	894	246	390	546	696	796	896
	H3		2814	2964	2964	3114	3214	3314	2666	2816	2966	3116	3216	3316
	H4		4999	5149	5149	5299	5399	5499	5101	5345	5501	5651	5751	5851
	H5		660						482					
	b		260		300				300					
最大轮压 Max.Wheel Loading		kN	206	218	233	247	257	269	229	243	254	270	279	293
荐用钢轨 Crane Rail Recommended			荐用QU70或方钢90X90						荐用QU70或方钢90X90					
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V						三相交流 3-Phase A.C.50Hz 380V					

抓斗 Grab	型 号	U	141	137	138	133	134	129	130	155	151	152	147	148	143	144
	类 型		轻型	中型		重型		超重型		轻型	中型		重型		超重型	
	容 积	m^3	8	4.8		3.2		2.5		10	6		4		3	
	物 料 密 度	t/m^3	≤1	>1~1.7		>1.7~2.5		>2.5~3.3		≤1	>1~1.7		>1.7~2.5		>2.5~3.3	
	自 重	Kg	7840	7993	8143	8008	8159	8155	8305	9812	10098	10287	9976	10123	9780	10206
	主要尺寸 main dimension D		4380	4050	4050	3750	3750	3430	3430	5000	4500	4500	4000	4000	3800	3800
	Ba		3200	2820	2820	2600	2600	2350	2350	3500	3200	3200	2900	2900	2400	2400
	Bb		2350	2078	2078	1792	1792	1628	1628	2478	2288	2288	1892	1892	1892	1892
	Bh		4775	4605	4605	4455	4455	4285	4285	5215	4955	4955	4795	4795	4695	4695

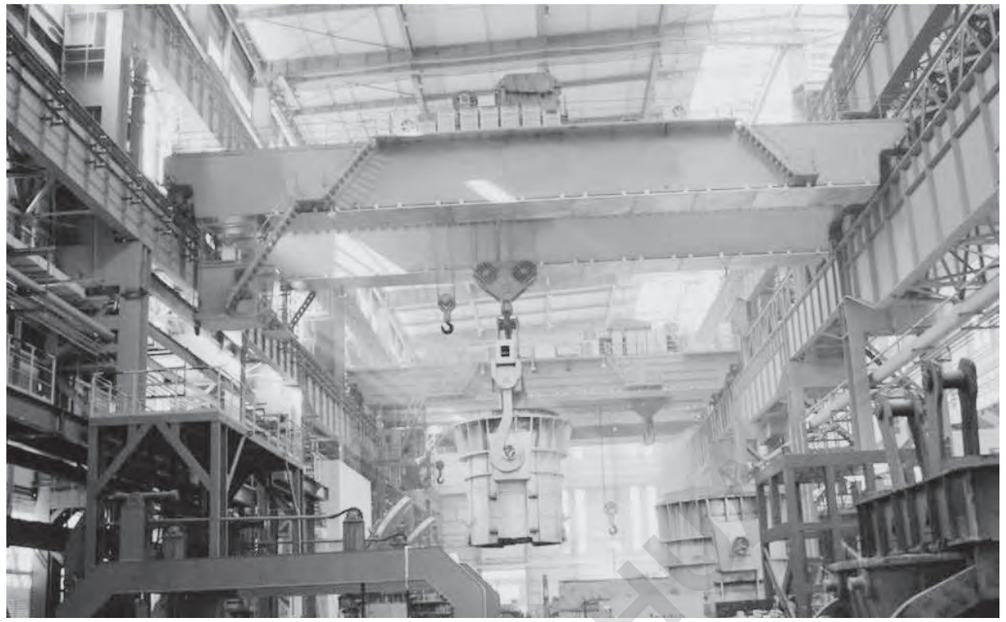

YZ型5~320t吊钩桥式铸造起重机

YZ FOUNDRY CRANE CAP. 5-320T

产品概述：


铸造起重机是炼钢连铸工艺中的主要设备。主要用于吊运和转运液态钢包。
从总体构造可分为：双梁双轨、四梁四轨、四梁六轨等型式。前两种一般用于中、大吨位铸造起重机，第三种一般用于特大吨位铸造起重机。
我公司设计制造的铸造起重机技术先进、结构新颖、安全可靠、经济耐用、维护简单。
另外，我们的铸造起重机可提供以下功能，供用户选配：
1.可旋转吊具。2.龙门钩钩距可变。3.载荷的称重及显示。

Product Introduction:

Casting crane is the main equipment of steelmaking and continuous casting process. Mainly used for lifting and transportation of liquid steel ladle.
Overall structure can be divided into: double girder double-track, four beams and four-track, four-beam rail and other types. The first two are generally used for large tonnage crane, and the third is generally used for large tonnage of foundry crane.
Casting crane company design and manufacture of advanced technology, novel structure safe and reliable, economical and durable, and easy maintenance. In addition, our casting crane offers the following features to be selected:
1. rotary spreader. 2. the gantry hook from the variable. 3. load weighing and display.

QDY型5~10t冶金起重机

QDY Metallurgic Crane Cap. 5-10t

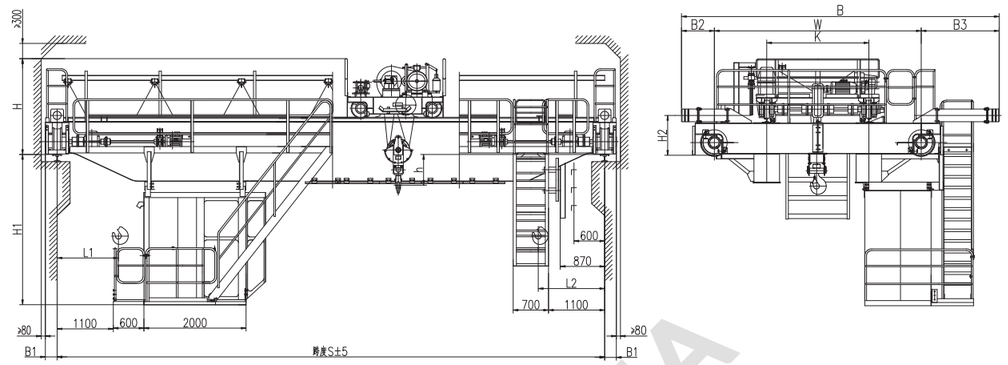


技术规格　Technical Specifications

起重量 Lifting capacity			5								10							
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			16								20							
工作制度 Duty			A7								A7							
速度 Speed	起升 Hositing	m/min	12.9								13							
	小车运行 Crab travelling		39.5								35.2							
	大车运行 Crane travelling		93.7				95.2				95.2						88.3	
极限尺寸 limit dimension	L1	mm	1600								1600							
	L2		1250								1300							
	h		71								602						552	
主要尺寸 main dimension	H	mm	1763								1876						1926	
	H1		2598	2648	2748	2898	2948	3098	3248	3398	2598	2648	2748	2898	2948	3048	3198	3348
	H2		800+H0					800+H0			800+H0						850+H0	
	B		5158			5308		6268			5808			6048			6628	
	K		1400								2000							
	W		3400			3550		5000			4050						5000	
	B1		230								230							
	B2		514					634			514			634				
	B3		1244					634			1244			1364			994	
最大轮压 Max.Wheel Loading		KN	80	87	92	101	107	123	134	143	112	120	129	138	145	160	171	181
电机总功率 Total Power		kw	24.5			27.1					40.1						45.5	
荐用钢轨 Crane Rail Recommended			43kg/m															
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V															

WEIHUA

QDY型16/3.2~20/5t冶金起重机

QDY Metallurgic Crane Cap. 16/3. 2-20/5t

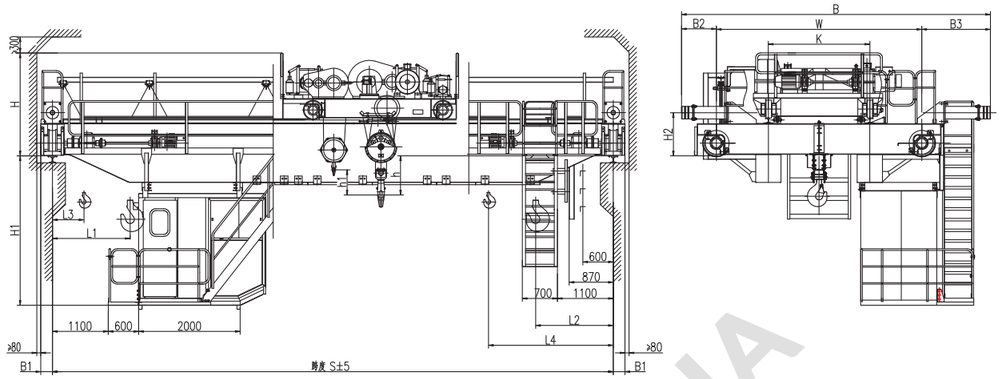


技术规格 Technical Specifications

起重量 Lifting capacity			16/3.2								20/5							
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			16								12							
			18								14							
工作制度 Duty			A7								A7							
速度 Speed	主钩 Main	m/min	10.9								9.8							
	副钩 Aux.		11.5								12.75							
	小车运行 Crab travelling		31								37							
	大车运行 Crane travelling		87.8			90.4					88.3			90.9				
极限尺寸 limit dimension	L1	mm	1930								1980							
	L2		1530								1530							
	L3		1070								1050							
	L4		2390								2460							
	h		729	727		637		639			701	699		609				
	h1		770								496							
主要尺寸 main dimension	H		2095	2097		2187		2185			2097	2099		2189				
	H1		2600	2600	2700	2760	2910	3060	3210	3360	2600	2602	2702	2764	2912	3062	3212	3362
	H2		850+H0			940+H0					850+H0			940 +H0				
	B		6278			6428		7038			6278			6428		7038		
	K		2000								2000							
	W		4400					5000			4400					5000		
	B1		230			260					230			260				
	B2		614			684		689			614			684		689		
	B3		1264			1344		1349			1264			1344		1349		
最大轮压 Max.Wheel Loading		KN	152	159	168	182	190	204	216	229	176	183	193	207	216	231	242	253
电机总功率 Total Power		kw	54.3			59.7					71.7			79.7				
荐用钢轨 Crane Rail Recommended			43kg/m or QU70															
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V															

QDY型32/5~50/10t冶金起重机

QDY Metallurgic Crane Cap. 32/5-50/10t

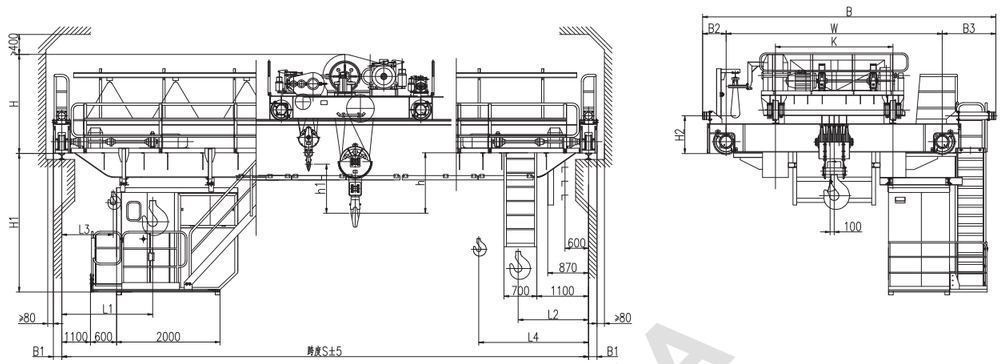


技术规格 Technical Specifications

起重量 Lifting capacity			32/5							50/10							
跨度 Span		m	13.5	16.5	19.5	22.5	25.5	28.5	31.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			16							12						
			18							16						
工作制度 Duty			A7							A7						
速度 Speed	主钩 Main	m/min	7.7							6.3						
	副钩 Aux.		12.75							10.5						
	小车运行 Crab travelling		37.6							31.8						
	大车运行 Crane travelling		90.9		77					77		77.8				
极限尺寸 limit dimension	L1	mm	2050							2200						
	L2		1700							2000						
	L3		1070							1005						
	L4		2680							3195						
	h		701		571					1018		1012				
	h1		790							948						
主要尺寸 main dimension	H		2351	2451		2481				2750		2754				
	H1		2666	2816	2834	3034	3184	3334	3434	2616	2672	2822	3022	3172	3322	3422
	H2		940+H0			1070+H0				1090+H0						
	B		6588		6848		7068			6828		6998		7198		
	K		2500							2500						
	W		4650		4700		5000			4800				5000		
	B1		260		300					300						
	B2		664		734					714		784				
	B3		1274		1414		1334			1314		1414				
最大轮压 Max.Wheel Loading		KN	262	277	296	310	327	339	354	365	388	409	426	445	460	481
电机总功率 Total Power		kw	90.5							118.5		130.5				
荐用钢轨 Crane Rail Recommended			QU70 or 方钢90							QU80 or 方钢100						
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V													

WEIHUA

QDY型74/20t冶金起重机

QDY Metallurgic Crane Cap. 74/20t

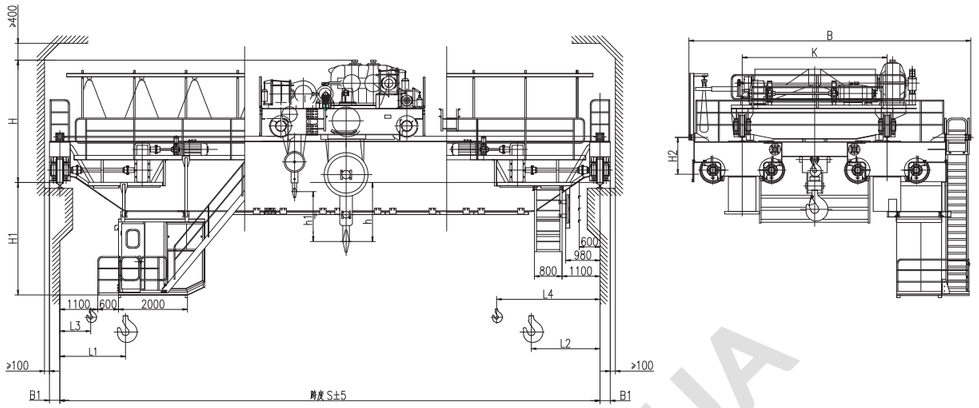


技术规格 Technical Specifications

起重量 Lifting capacity			74/20						
跨度 Span		m	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height		m	20						
			22						
工作制度 Duty			A7						
速度 Speed	主钩 Main	m/min	6.4						
	副钩 Aux.		9.7						
	小车运行 Crab travelling		37.2						
	大车运行 Crane travelling		67.4			77			
极限尺寸 limit dimension	L1	mm	2400						
	L2		2750						
	L3		1050						
	L4		4100						
	h		1330	1328	1324	1320	1318	1318	1316
	h1		1240						
主要尺寸 main dimension	H	mm	3521	3523	3525	3531	3531	3531	3533
	H1		2910	3062	3064	3070	3370	3372	3472
	H2		950+H0			1380+H0			
	B		8828						
	K		4400						
	B1		310						
最大轮压 Max.Wheel Loading		KN	278	292	304	318	330	340	351
电机总功率 Total Power		kw	200			214			
荐用钢轨 Crane Rail Recommended			QU100						
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V						

YZ型100/32~125/32t铸造起重机

YZ Foundry Crane Cap. 100/32-125/32t

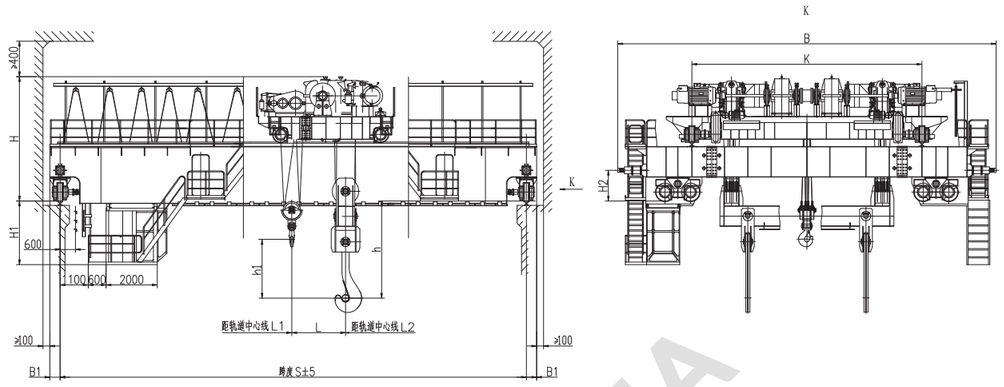


技术规格 Technical Specifications

起重量 Lifting capacity	主钩 Main	t	100				125		
	副钩 Aux.		32				32		
跨度 Span		m	19.5	22.5	25.5	28.5	19.5	22.5	25.5
起升高度 Lifting Height			20				20		
			22				22		
工作制度 Duty			A7				A7		
速度 Speed	主钩 Main	m/min	7.5				7.5		
	副钩 Aux.		10.5				10.5		
	小车运行 Crab travelling		38				38		
	大车运行 Crane travelling		68				79.7		
极限尺寸 limit dimension	L1	mm	1600				1600		
	L2		2200				2200		
	L		2500				2450		
	h		3997				4097		
	h1		2300				2300		
主要尺寸 main dimension	H	mm	4900				5150		
	H1		2687				2687		
	B		14500				14900		
	K		9200				9600		
	B1		410				410		
最大轮压 Max.Wheel Loading		kN	486	516	540	560	605	618	632
电机总功率 Total Power		kw	393				479		
荐用钢轨 Crane Rail Recommended			QU120				QU120		
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V				三相交流 3-Phase A.C.50Hz 380V		

WEIHUA

YZ型125/32~140/40t铸造起重机

YZ Foundry Crane Cap. 125/32-140/40t

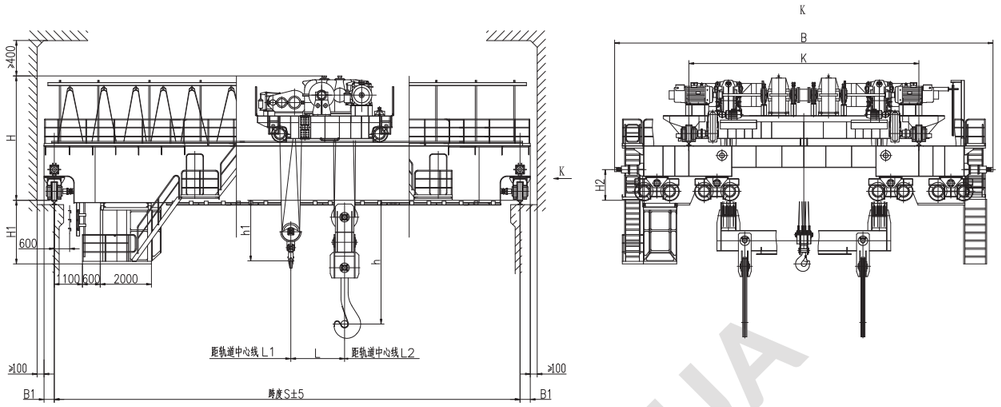


技术规格 Technical Specifications

起重量 Lifting capacity	主钩 Main	t	125	140		
	副钩 Aux.		32	40		
跨度 Span		m	28.5	22	25	28
起升高度 Lifting Height			20	22		
			22	22		
工作制度 Duty			A7	A7		
速度 Speed	主钩 Main	m/min	7.5	6.84		
	副钩 Aux.		10.5	9.1		
	小车运行 Crab travelling		38	38		
	大车运行 Crane travelling		73	73		
极限尺寸 limit dimension	L1	mm	1600	1500		
	L2		2200	2000		
	L		2450	2500		
	h		3997	4200		
	h1		2300	300		
主要尺寸 main dimension	H	mm	5050	5200		
	H1		2839	2600		2700
	B		14900	17000		
	K		9600	11000		
	B1		410	500		
最大轮压 Max.Wheel Loading		kN	343	356	366	376
电机总功率 Total Power		kw	479	479		
荐用钢轨 Crane Rail Recommended			QU120	QU120		
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V			

YZ型100/32~125/32t铸造起重机

YZ Foundry Crane Cap. 100/32-125/32t

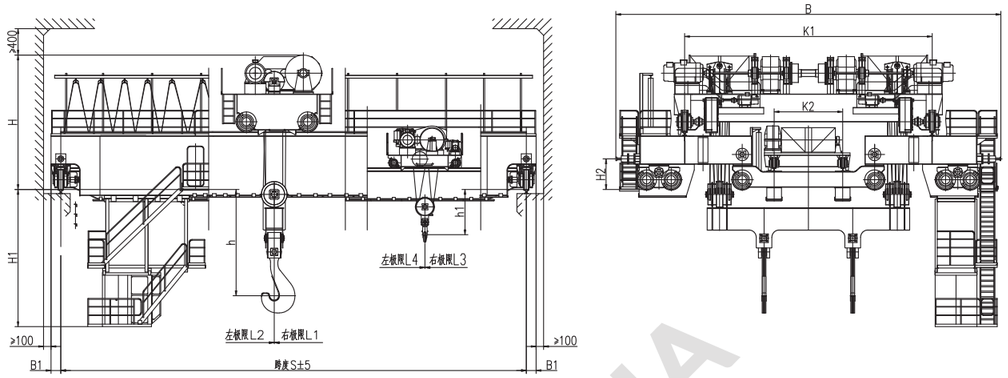


技术规格 Technical Specifications


起重量 Lifting capacity	主钩 Main	t	100				125			
	副钩 Aux.		32				32			
跨度 Span		m	19	22	25	28	19	22	25	28
起升高度 Lifting Height			20				20			
			22				22			
工作制度 Duty			A7				A7			
速度 Speed	主钩 Main	m/min	7.5				7.5			
	副钩 Aux.		12				12			
	主小车运行 Crab travelling		32.5				38			
	副小车运行 Crab travelling		37.4				37.4			
	大车运行 Crane travelling		78				79.7			
极限尺寸 limit dimension	L1	mm	1750				1900			
	L2		2250				2250			
	L3		1850				1850			
	L4		2000				2000			
	h		4340				5478			
	h1		1433				1423			
主要尺寸 main dimension	H	mm	5422				5735			
	H1		5000				5000			
	B		14800				15100			
	K1		9500				10200			
	K2		2300				2500			
	B1		504				504			
最大轮压 Max.Wheel Loading		kN	386	405	423	458	471	490	530	550
电机总功率 Total Power		kw	426.5				484.5			
荐用钢轨 Crane Rail Recommended			QU120				QU120			
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V				三相交流 3-Phase A.C.50Hz 380V			

WEIHUA

YZ型140/40t铸造起重机

YZ Foundry Crane Cap. 140/40t

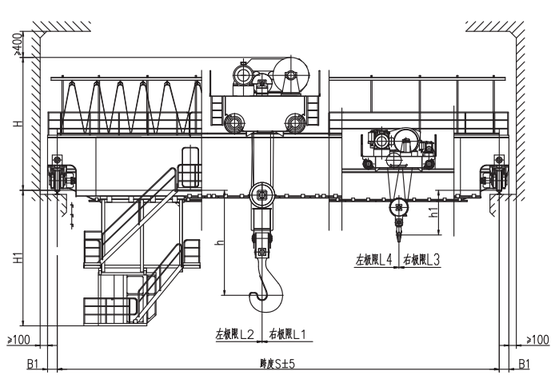

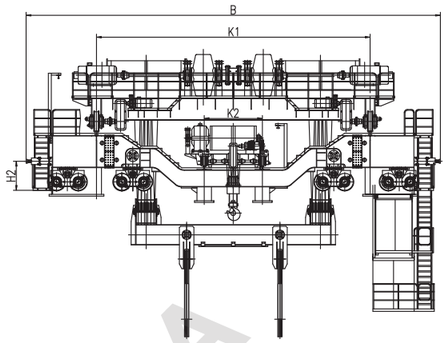



技术规格　Technical Specifications

起重量 Lifting capacity	主钩 Main	t	140		
	副钩 Aux.		40		
跨度 Span		m	22	25	28
起升高度 Lifting Height			22		
			22		
工作制度 Duty			A7		
速度 Speed	主钩 Main	m/min	6.84		
	副钩 Aux.		9.6		
	主小车运行 Crab travelling		38		
	副小车运行 Crab travelling		38		
	大车运行 Crane travelling		77.8		
极限尺寸 limit dimension	L1	mm	1850		
	L2		2400		
	L3		1700		
	L4		1600		
	h		4200		
	h1		1066		
主要尺寸 main dimension	H	mm	5600		
	H1		2600		
	B		17600		
	K1		11600		
	K2		2400		
	B1		500		
最大轮压 Max.Wheel Loading		kN	401	407	419
电机总功率 Total Power		kw	510.5		
荐用钢轨 Crane Rail Recommended			QU120		
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V		

YZ型160/40t铸造起重机

YZ Foundry Crane Cap. 160/40t

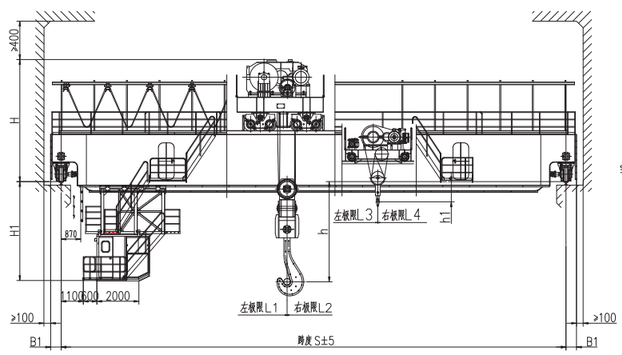

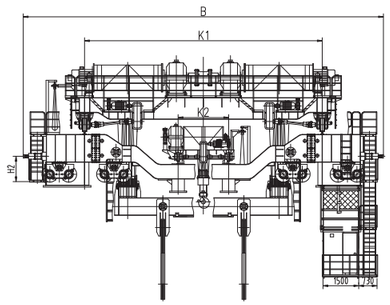


技术规格　Technical Specifications

起重量 Lifting capacity	主钩 Main	t	160		
	副钩 Aux.		40		
跨度 Span		m	22	25	28
起升高度 Lifting Height			22		
			22		
工作制度 Duty			A7		
速度 Speed	主钩 Main	m/min	0.6~6		
	副钩 Aux.		9.5		
	主小车运行 Crab travelling		37		
	副小车运行 Crab travelling		38		
	大车运行 Crane travelling		77.8		
极限尺寸 limit dimension	L1	mm	2400		
	L2		1800		
	L3		1700		
	L4		1700		
	h		4871		
	h1		1886		
主要尺寸 main dimension	H	mm	5695		
	H1		4710	4812	
	B		16932		
	K1		11300		
	K2		2400		
	B1		500		
最大轮压 Max.Wheel Loading		kN	400	410	420
荐用钢轨 Crane Rail Recommended			QU120		
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V		

WEIHUA

YZ型180/50~240/75t铸造起重机

YZ Foundry Crane Cap. 180/50-240/75t

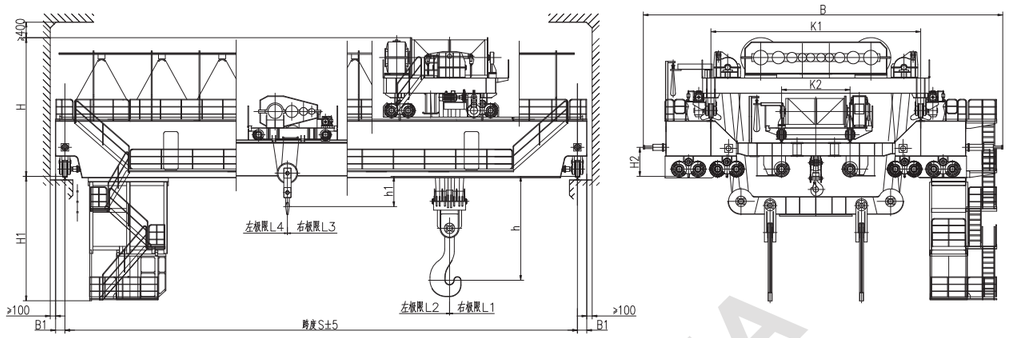



技术规格 Technical Specifications

起重量 Lifting capacity	主钩 Main	t	180	200	225	240
	副钩 Aux.		50	50	65	75
跨度 Span		m	28.5	28	27	24
起升高度 Lifting Height			27	26	28	30
			29	26	28	30
工作制度 Duty			A7	A7	A7	A7
速度 Speed	主钩 Main	m/min	7.2	8	8	10
	副钩 Aux.		9.3	9.3	10	10.5
	主小车运行 Crab travelling		38	40	40	38
	副小车运行 Crab travelling		40	40	38	40
	大车运行 Crane travelling		86	86	87	87
极限尺寸 limit dimension	L1	mm	2600	2600	2600	3200
	L2		2600	2600	3000	3600
	L3		2350	2400	2400	2500
	L4		1600	1600	1800	2000
	h		6000	6200	6200	6200
	h1		1200	1500	1500	1800
主要尺寸 main dimension	H	mm	6500	7200	7200	7500
	H1		5000	5500	5500	5000
	B		16800	17800	17800	17800
	K1		10600	10500	10500	10500
	K2		3000	3000	3500	3500
	B1		450	500	500	500
最大轮压 Max.Wheel Loading		kN	525	550	585	625
荐用钢轨 Crane Rail Recommended			QU120	QU120	QU120	QU120
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V			

YZ型280/75~320/80t铸造起重机

YZ Foundry Crane Cap. 280/75-320/80t

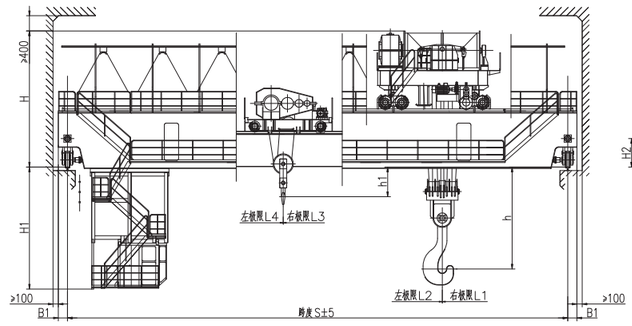


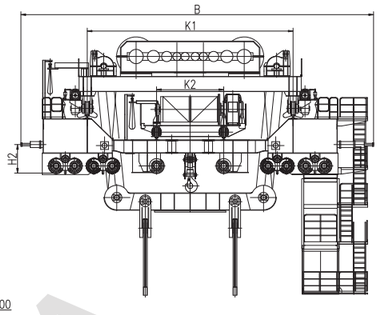

技术规格 Technical Specifications

起重量 Lifting capacity	主钩 Main	t	280	320
	副钩 Aux.		75	80
跨度 Span		m	21	24.5
起升高度 Lifting Height			24	28
			26	32
工作制度 Duty			A7	A7
速度 Speed	主钩 Main	m/min	10	9
	副钩 Aux.		10.5	10
	主小车运行 Crab travelling		36	36
	副小车运行 Crab travelling		39	39
	大车运行 Crane travelling		76	63
极限尺寸 limit dimension	L1	mm	3200	3300
	L2		3600	3600
	L3		2500	2500
	L4		2000	2000
	h		6200	6000
	h1		1800	1800
主要尺寸 main dimension	H	mm	7600	7800
	H1		5000	5000
	B		19200	19500
	K1		12000	12500
	K2		3800	5000
	B1		500	500
最大轮压 Max.Wheel Loading		kN	595	650
荐用钢轨 Crane Rail Recommended			QU120	QU120
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V	三相交流 3-Phase A.C.50Hz 380V

WEIHUA

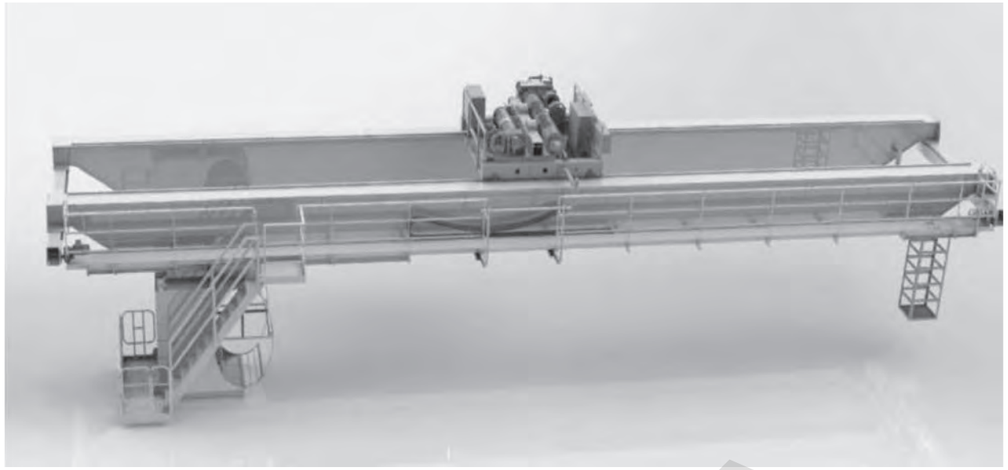

5-400t新型吊钩桥式起重机

5~400T NEW-TYPE OVERHEAD CRANE WITH HOOK

产品概述：

新型吊钩桥式起重机是采用系列化、标准化、模块化设计理论，利用现代计算机技术辅助设计，引进先进技术，设计的一套适应行业发展的起重机结构。

产品特点：

1、自重轻、轮压小、净空低，有效节省厂房造价。

2、吊钩极限小，作业面积大，覆盖范围广。

3、传动环节少，传动效率高，故障点低。

4、高品质零部件，维护量小，使用寿命长。

5、整机变频调速，起制动平稳，使用安全方便。

6、整机功率小，有效节约电力等资源。

7、多种可选项：吊钩防摇摆、双制动……

Product Introduction:

The new-type overhead crane with hook adopts the design philosophy of seriation, standardization and modularization, using modern computer technology and introducing advanced technology, to fabricate a kind of crane that adapt to the development of the industry.

Product Features:

1、 light deadweight, small wheel pressure, low clearance, effectively saving plant cost.

2、small limit of hook, large working area, wide coverage range.

3、less transmission links, high transmission efficiency, low failure point.

4、 high quality parts, small maintenance, long service life.


5、 frequency control of the whole crane, stable braking, safe and convenient to use.

6、 The power of the whole crane is small, which effectively saves electric power resource.

7、 Support multiple-selection: anti-sway of hook, double braking etc.

5~10t新型吊钩桥式起重机

5-10t new-type overhead crane with hook

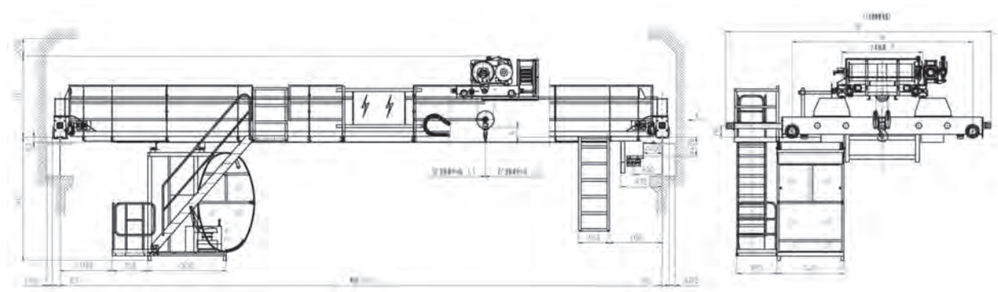


技术规格　Technical Specifications

起重量 Lifting Capacity	主钩Main	t	5								10							
	副钩Aux		——								——							
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			18								18							
			——								——							
工作制度			A5								A5							
速度 Speed	主钩Main	m/min	0.8～8.4								0.8～8							
	副钩Aux		——								——							
	小车运行 Crab Travelling		2.5～25								2.5～25							
	大车运行 Crane Travelling		5.2～52								5.4～54							
极限尺寸 Limit Dimension	L1	mm	842								937							
	L2		1195								1195							
	L		——								——							
	h		68	68	88	88	215	265	261	267	57	37	37	25	75	77	81	81
	h1		——								——							
主要尺寸 Main Dimension	H0	mm	200				250				250							
	H1		1583	1583	1603	1603	1730	1780	1782	1782	1743	1763	1763	1825	1875	1877	1881	1881
	H2		2421	2471	2504	2551	2524	2574	2624	2674	2406	2436	2486	2524	2574	2624	2674	2774
	H3		-4	46	76	126	99	149	199	249	-5	11	61	99	149	199	249	349
	B		5044				5422				5672							
	W		3250				3550				3800							
	K		1450								1700							
	B1		160								160							
	B2		145								145							
最大轮压 Max.Wheel Loading		KN	47	50	55	58	64	69	76	80	74	79	83	89	94	100	106	113
电机总功率 Power		KW	11.24				12.64				19.1				20.5			
荐用钢轨 Crane Rail Recommended			38kg/m								43kg/m							
电源 Power Supply			三相交流 3-Phase A.C 50Hz 380V								三相交流 3-Phase A.C 50Hz 380V							

16/5~20/5t新型吊钩桥式起重机

16/5-20/5t new-type overhead crane with hook

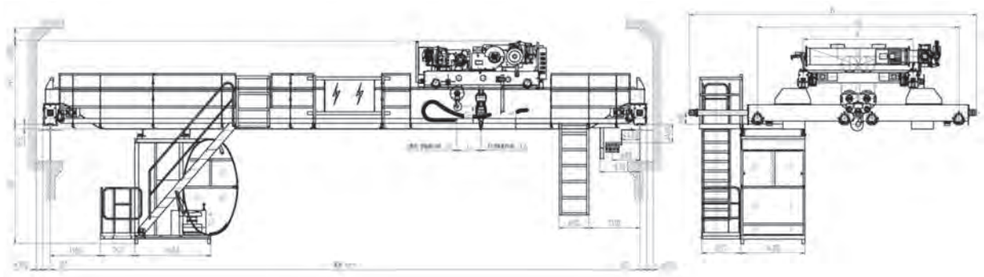


技术规格　Technical Specifications

起重量 Lifting Capacity	主钩Main	t	16								20							
	副钩Aux		5								5							
跨度Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			18								18							
			18								18							
工作制度			A5								A5							
速度 Speed	主钩Main	m/min	0.75～7.5								0.6～6							
	副钩Aux		0.84～8.4								0.84～8.4							
	小车运行 Crab Travelling		3～30								3～30							
	大车运行 Crane Travelling		5.4～54								5.1～51							
极限尺寸 Limit Dimension	L1	mm	874								874							
	L2		1428								1428							
	L		534								534							
	h		-121	-121	-57	7	3	3	3	97	-139	-135	-71	-21	17	17	17	105
	h1		363								363							
主要尺寸 Main Dimension	H0	mm	250								250							
	H1		1827	1827	1891	1941	1945	1945	1945	2045	1827	1831	1895	1945	1949	1949	1949	2049
	H2		2436	2486	2522	2622	2672	2772	2872	2872	2436	2486	2522	2622	2672	2772	2872	2872
	H3		11	61	97	197	247	347	447	447	11	61	97	197	247	347	447	447
	B		6272								6272							
	W		4400								4400							
	K		2400								2400							
	B1		160								160							
	B2		160								160							
最大轮压 Max.Wheel Loading		KN	57	61	64	67	71	74	78	82	66	70	74	77	81	85	89	93
电机总功率 Power		KW	38.5					40.5			38.5				40.5			
荐用钢轨 Crane Rail Recommended			43kg/mm								43kg/m							
电源 Power Supply			三相交流 3-Phase A.C 50Hz 380V								三相交流 3-Phase A.C 50Hz 380V							

32/5~50/10t新型吊钩桥式起重机

32/5-50/10t new-type overhead crane with hook

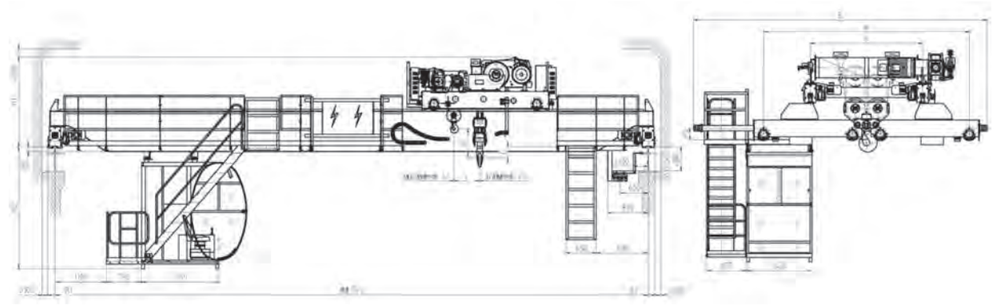


技术规格　Technical Specifications

起重量 Lifting Capacity	主钩Main	t	32								50							
	副钩Aux		5								10							
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			18								18							
			18								18							
工作制度			A5								A5							
速度 Speed	主钩Main	m/min	0.5～5								0.4～4							
	副钩Aux		0.84～8.4								0.8～8							
	小车运行 Crab Travelling		3～30								3.2～32							
	大车运行 Crane Travelling		5～50								5～50							
极限尺寸 Limit Dimension	L1	mm	1000								985							
	L2		1621								1725							
	L		555								597							
	h		162	158	108	108	108	-4	-19.5	-19.5	283	279	279	275	171	171	171	67
	h1		624								384							
主要尺寸 Main Dimension	H0	mm	250								250							
	H1		2052	2056	2106	2106	2106	2210	2234	2234	2159	2163	2163	2167	2271	2271	2271	2375
	H2		2422	2522	2622	2772	2872	2872	2949	3049	2549	2649	2749	2849	2849	2949	3049	3049
	H3		-3	97	197	347	447	447	524	624	124	224	324	424	424	524	624	624
	B		6272						6612		7432							
	W		4400						4560		5380							
	K		2400								3300							
	B1		180								180							
	B2		170								170							
最大轮压Max.Wheel Loading		KN	98	102	107	112	117	123	130	133	142	151	156	163	171	176	182	189
电机总功率 Power		KW	48.5				51.5				73							
荐用钢轨 Crane Rail Recommended			43kg/m								43kg/m							
电源 Power Supply			三相交流 3-Phase A.C 50Hz 380V								三相交流 3-Phase A.C 50Hz 380V							

63/16~75/20t新型吊钩桥式起重机

63/16-75/20t new-type overhead crane with hook

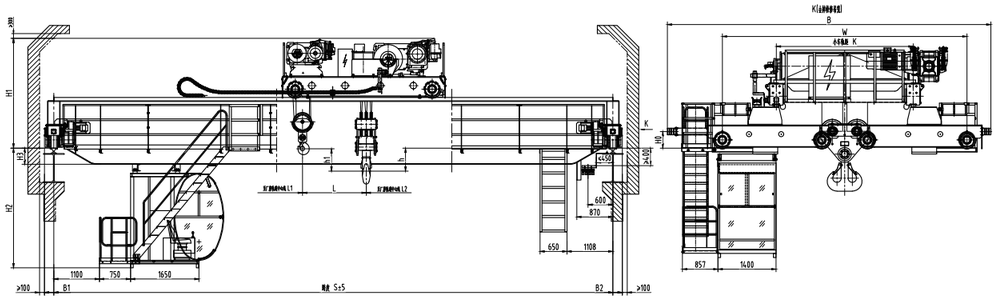


技术规格　Technical Specifications

起重量 Lifting Capacity	主钩Main	t	63							75						
	副钩Aux		16							20						
跨度 Span	S	m	13.5	16.5	19.5	22.5	25.5	28.5	31.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			18							18						
			18							18						
工作制度			A5							A5						
速度 Speed	主钩Main	m/min	0.35～3.5							0.35～3.5						
	副钩Aux		0.76～7.6							0.6～6						
	小车运行 Crab Travelling		3～30							2.7～27						
	大车运行 Crane Travelling		4.8～48							4.8～48						
极限尺寸 Limit Dimension	L1	mm	672							672						
	L2		1804							1907						
	L		1458							1505						
	h		348	348	248	246	196	196	194	509	409	407	357	357	355	355
	h1		141							707						
主要尺寸 Main Dimension	H0		376							376						
	H1		2414	2414	2514	2516	2566	2566	2568	2547	2647	2649	2699	2699	2701	2701
	H2		2511	2661	2661	2863	2913	2913	3015	2661	2661	2763	2913	2913	3015	3115
	H3		348	236	236	338	488	488	590	236	236	338	488	488	590	690
	B		7702					7902		7702				7902		
	W		5800					6000		5800				6000		
	K		3200							3200						
	B1		250							250						
	B2		250							250						
最大轮压 Max.Wheel Loading		KN	222	227	233	239	246	253	260	259	265	271	277	285	291	302
电机总功率 Power		KW	89							105						
荐用钢轨 Crane Rail Recommended			QU80							QU80						
电源 Power Supply			三相交流 3-Phase A.C 50Hz 380V							三相交流 3-Phase A.C 50Hz 380V						

100/20~125/32t新型吊钩桥式起重机

100/20-125/32t new-type overhead crane with hook

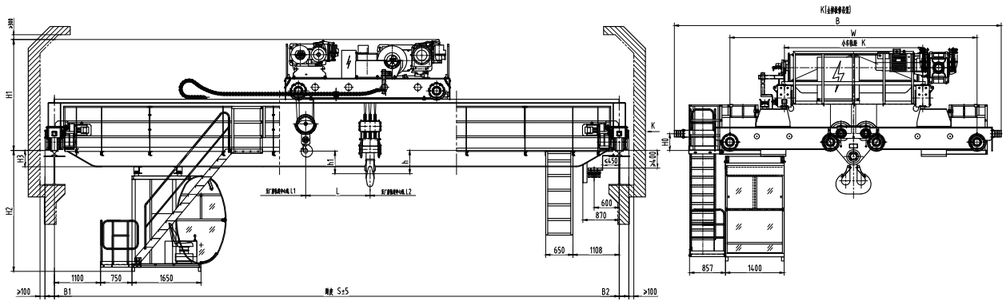


技术规格　Technical Specifications

起重量 Lifting Capacity	主钩Main	t	100						125					
	副钩Aux		20						32					
跨度 Span	S	m	16.5	19.5	22.5	25.5	28.5	31.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			18						16					
			18						18					
工作制度			A5						A5					
速度 Speed	主钩Main	m/min	0.3～3						0.22～2.2					
	副钩Aux		0.6～6						0.5～5					
	小车运行 Crab Travelling		2.7～27						2.7～27					
	大车运行 Crane Travelling		4.7～47						4.7～47					
极限尺寸 Limit Dimension	L1	mm	672						715					
	L2		2122						2182					
	L		1560						1657					
	h		478	428	426	426	426	376	340	338	338	286	286	186
	h1		562						588					
主要尺寸 Main Dimension	H0		460						460					
	H1		2954	3004	3006	3006	3006	3056	3030	3032	3032	3084	3084	3184
	H2		2663	2813	2815	2915	3015	3165	2807	2809	3009	3061	3161	3261
	H3		238	388	390	490	590	740	382	384	584	636	736	836
	B		8152		8172		8252		8152	8172		8252		
	W		5850		5870		5950		5850	5870		5950		
	K		3200						3200					
	B1		280						280					
	B2		280						280					
最大轮压 Max.Wheel Loading		KN	342	348	358	364	374	383	408	418	426	438	446	455
电机总功率 Power		KW	107						126					
荐用钢轨 Crane Rail Recommended			QU100						QU100					
电源 Power Supply			三相交流 3-Phase A.C 50Hz 380V						三相交流 3-Phase A.C 50Hz 380V					

160/32型吊钩桥式起重机

160/32t new-type overhead crane with hook

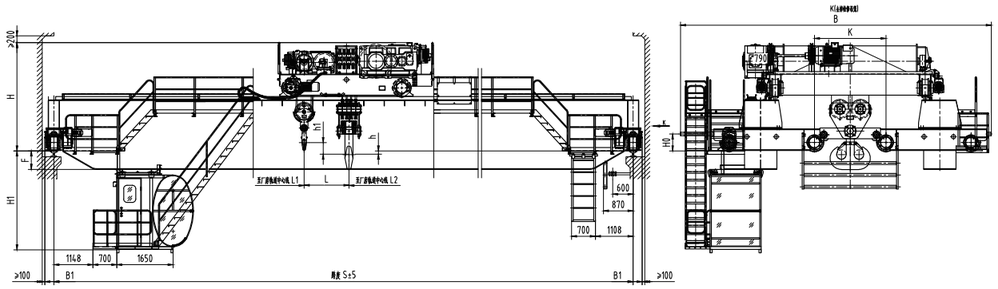


技术规格　Technical Specifications

起重量 Lifting Capacity	主钩 Main	t	160					
	副钩 Aux.		32					
跨度 Span		m	22	25	28	31	34	
起升高度 Lifting Height	Main	m	24					
	Aux.		26					
工作制度 Duty			A5					
速度 Speed	主钩 Main	m/min	0.25~2.5					
	副钩 Aux.		0.5~5					
	小车运行Crab Travelling		2.65~26.5					
	大车运行 Crane Travelling		4.67~46.7					
极限尺寸 Limit Dimension	L1	mm	825					
	L2		2490					
	L		1315					
	h		195.5		95.5			
	h1		342					
主要尺寸 Main Dimension	H0	mm	500					
	H		3061		3161			
	H1		2690	2890		3090	3290	
	B		9120					
	K		4400					
	B1		264					
	F		340	540		740	940	
最大轮压 Max.Wheel Loading		kN	531.9	544.8	554.7	564.2	574.9	
电机总功率 Power		kW	153		161			
荐用钢轨 Crane Rail Recommended			QU120					
电源 Power Supply			3-Phase A.C.50Hz 380V					


400/50t新型吊钩桥式起重机

400/50t new-type overhead crane with hook

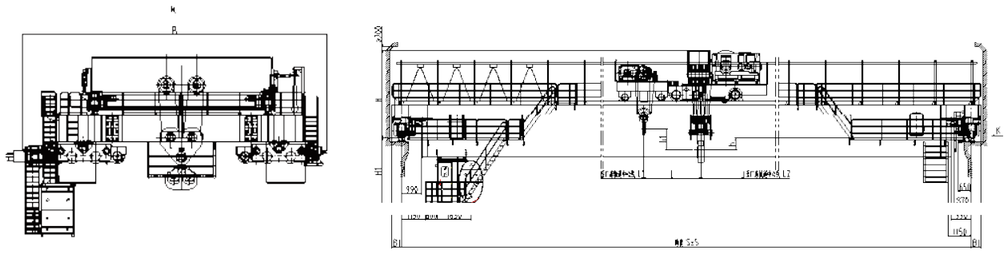


技术规格　Technical Specifications


起重量 Lifting Capacity	主钩 Main	t	400
	副钩 Aux.		50
跨度 Span		m	34
起升高度 Lifting Height			40
工作制度 Duty			A5
速度 Speed	主钩 Main	m/min	0.2~2
	副钩 Aux.		0.4~4
	小车运行 Crab travelling		2.5~25
	大车运行 Crane travelling		3~30
极限尺寸 Limit Dimension	L1	mm	1400
	L2		3200
	L		2800
	h		600
	h1		1028
主要尺寸 Main Dimension	H	mm	4893
	H1		3285
	B		13970
	B1		480
最大轮压 Max.Wheel Loading		kN	627
电机总功率 Power		kW	279
荐用钢轨 Crane Rail Recommended			QU120
电源 Power Supply			3-Phase A.C.50Hz 380V

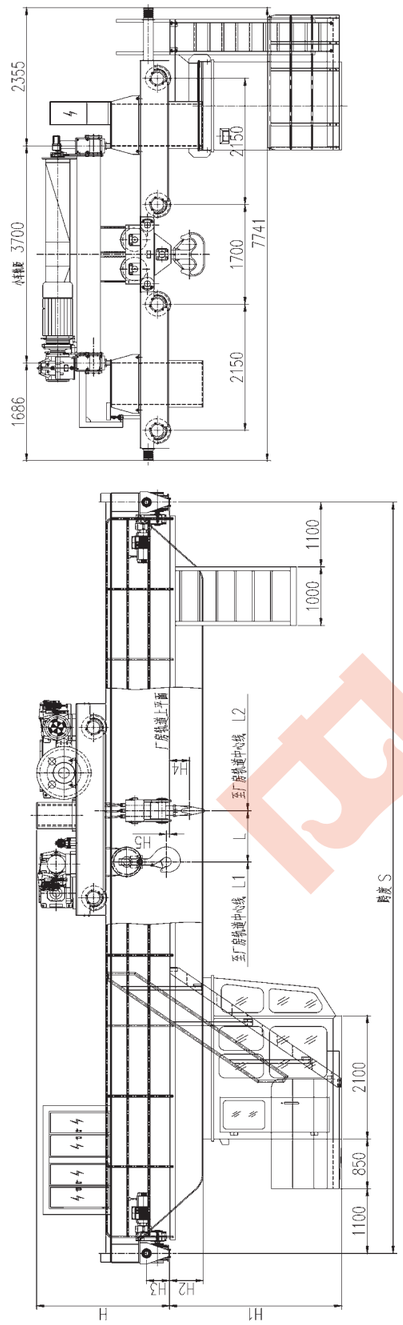

跨度S (m) Span		10.5m	13.5m	16.5m	19.5m	22.5m	25.5m	28.5m	31.5m
性能参数 Per fermance parameter	起重量(t) Lifting capacity	主钩(100t) Main hook				副钩(20t) Auxiliary hook			
	起升高度(m) Lifting Height	主钩(24m) Main hook				副钩(30m) Auxiliary hook			
	起升速度 Hoisting speed	主钩0.15～1.5m/min Main hook				副钩0.63～6.3m/min Auxiliary hook			
	运行速度 Travel speed	小车运行1.5～15m/min Crab travelling				起重机运行 2～30m/minThe Crane travelling			
	工作级别 Working system	A3							
	装机电容量 Installed Capacity	75.5kn			82.5kn				
	最大轮压 Max wheel load	286kn	298kn	308kn	315kn	320kn	328kn	340kn	349kn
主要结构尺寸 (mm)Dimensions	H	2462mm							
	H2	402mm	404mm	504mm	656mm	658mm	758mm	958mm	990mm
	H1	2902mm	2904mm	3004mm	3156mm	3158mm	3258mm	3458mm	3460mm
	H3	400mm							
	H4	450mm							
	H5	200mm							
	L	958mm							
	L1	850mm							
	L2	1850mm							

跨度S (m) Span		10.5m	13.5m	16.5m	19.5m	22.5m	25.5m	28.5m	31.5m
性能参数 Per fermance parameter	起重量(t) Lifting capacity	主钩(800) Main hook				副钩(200) Auxiliary hook			
	起升高度(m) Lifting Height	主钩(28m) Main hook				副钩(30m) Auxiliary hook			
	起升速度 Hoisting speed	主钩0.15～1.5m/min Main hook				副钩0.63～6.3m/min Auxiliary hook			
	运行速度 Travel speed	小车运行1.5～15m/min Crab travelling				起重机运行 3～30m/minThe Crane travelling			
	工作级别 Working system	A3							
	装机电容量 Installed Capacity	57.5kn			61.5kn				
	最大轮压 Max wheel load	231kn	245kn	256kn	266kn	269kn	278kn	288kn	296kn
主要结构尺寸 (mm)Dimensions	H	2196mm							
	H2	196mm	198mm	298mm	548mm	550mm	750mm	852mm	1052mm
	H1	2616mm	2618mm	2718mm	2968mm	2970mm	3170mm	3272mm	3472mm
	H3	200mm							
	H4	330mm							
	H5	50mm							
	L	1080mm							
	L1	956mm							
	L2	2226mm							

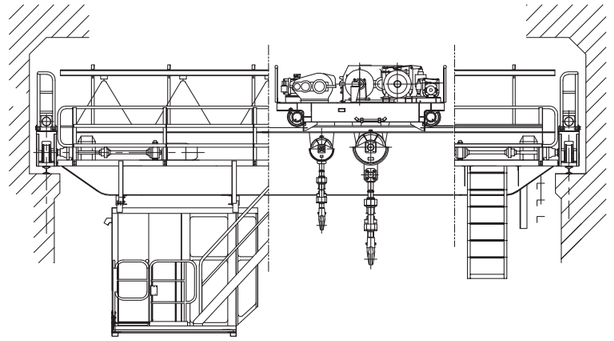

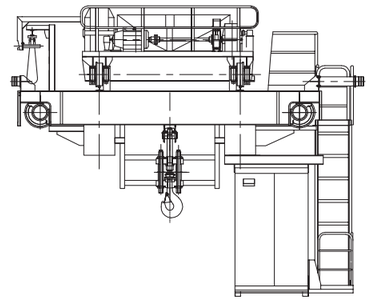

QY型5~50/10t绝缘吊钩桥式起重机
QY INSULATING OVERHEAD CRANE WITH HOOK CAP.5-50/10T

产品概述：


Q丫型绝缘吊钩桥式起重机适用于有色金属电解铝、镁、铅、锌等冶炼车间。
本起重机主要由桥架、大车运行机构、小车、电气设备等组成，为了防止在工作过程中带电设备上的电流可能通过被吊运的构件传到起重机上，危及司机的生命及设备的安全，故在起重机的适当部位设置了几道绝缘装置。
本起重机均为重级工作制。为确保起吊安全，起升机构配有双制动器。
该起重机的动作操作全部在司机室内完成。

Product Introduction:

QY model 5~50/10t insulating overhead crane with hook is applicable to workshop where smelting electrolytic nonferrous metal material, such as electrolytic magnesium.
The crane is composed of box bridge, running gear of crane, trolley and electrical device. Several insulating apparatus are mounted at proper parts of the crane to prevent the electric current of the energized equipment transmitting to the crane through the lifting. hook during operation, which will endanger the driver's life and the safety of equipments. The crane is heavy-duty. Dual actuator is equipped with the main mechanism for the purpose of safe hositting. All mechaisms shall be operated in the cab.

QY型5t绝缘吊钩桥式起重机

QY Insulating Overhead Crane with Hook Cap. 5t

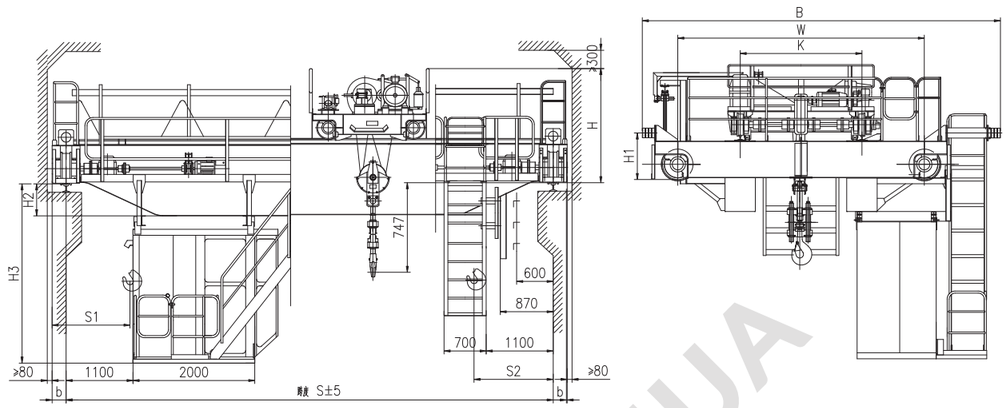


技术规格 Technical Specifications

起重量 Lifting capacity		t	5															
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			16								16							
工作制度 Duty			A5								A6							
速度 Speed	起升 Hoisting	m/min	12.5								15.5							
	小车运行 Crab travelling		37.2								37.2							
	大车运行 Crane travelling		90.7					91.9			115.6					116.8		
极限尺寸 limit dimension	S1		800															
	S2		1250															
主要尺寸 main dimension	H	mm	1793															
	H1		765															
	H2		-24	126	226	376	526	676	826	976	-24	126	226	376	526	676	826	976
	H3		2396	2546	2646	2796	2946	3096	3246	3396	2396	2546	2646	2796	2946	3096	3246	3396
	K		1400															
	W		3400			3550		5000			3400			5304		5000		
	B		5054			5204		5948			5058			5208		6028		
	b		230															
最大轮压 Max.Wheel Loading		kN	72	78	84	92	97	109	117	124	73	79	85	93	98	110	118	125
电机总功率 Total Power		kw	22.8					27.4			27.8					31.8		
荐用钢轨 Crane Rail Recommended			43kg/m															
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V															

QY型10t绝缘吊钩桥式起重机

QY Insulating Overhead Crane with Hook Cap. 10t

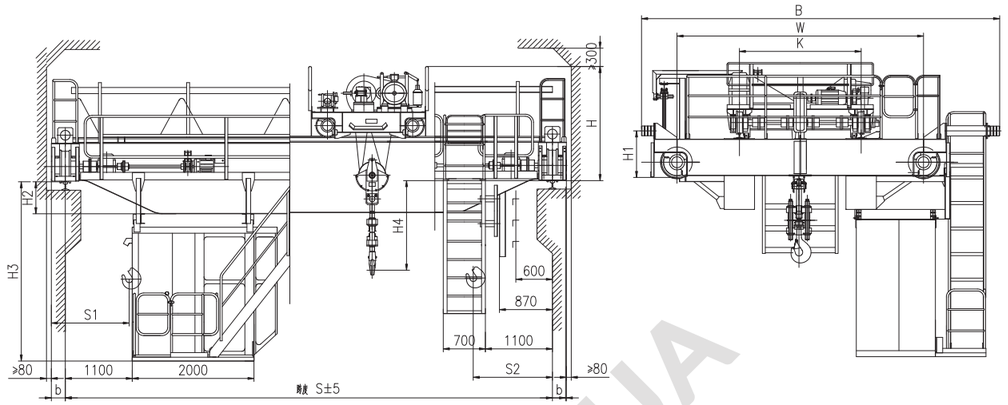


技术规格 Technical Specifications

起重量 Lifting capacity		t	10															
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			16								16							
工作制度 Duty			A5								A6							
速度 Speed	起升 Hoisting	m/min	8.5								13.3							
	小车运行 Crab travelling		43.8															
	大车运行 Crane travelling		90.7			91.9			84.7		115.6			116.8			112.5	
极限尺寸 limit dimension	S1		1050															
	S2		1300															
主要尺寸 main dimension	H	mm	1906					1956			1906					1956		
	H1		765					815			765					815		
	H2		-24	126	226	376	526	628	778	928	-24	126	226	376	526	628	778	928
	H3		2396	2546	2646	2796	2946	3048	3198	3348	2396	2546	2646	2796	2946	3048	3198	3348
	H4		1282					1232			1282					1232		
	K		2000															
	W		4050					5000			4050					5000		
	B		5704			5882		5948			5708			5848		6388		
	b		230															
最大轮压 Max.Wheel Loading		kN	101	108	117	122	129	141	150	158	102	109	118	123	130	142	151	159
电机总功率 Total Power		kw	27.5			32.1					35.5			39.5				
荐用钢轨 Crane Rail Recommended			43kg/m															
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V															

QY型16/3.2t绝缘吊钩桥式起重机

QY Insulating Overhead Crane with Hook Cap. 16/3. 2t

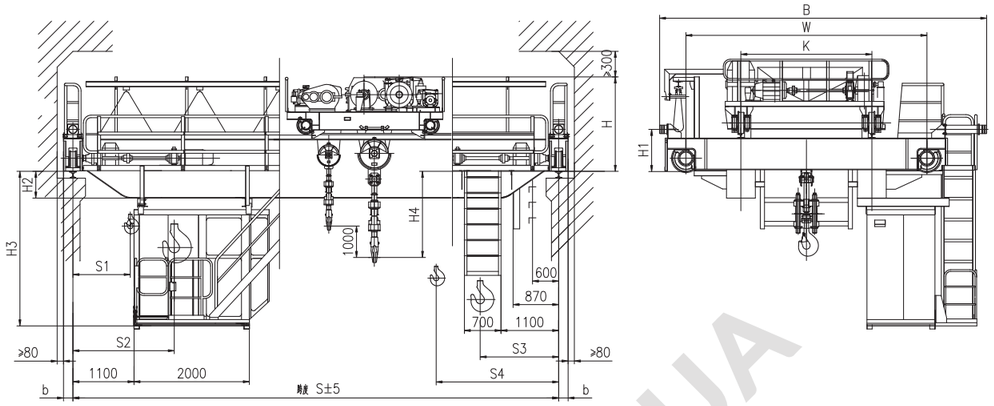


技术规格　Technical Specifications

起重量 Lifting capacity																	
	主钩 Main	t	16														
	副钩 Aux.		3.2														
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height	主钩 Main		16								16							
	副钩 Aux.		18								18							
工作制度 Duty			A5								A6							
速度 Speed	主起升 Main	m/min	7.9								13							
	副起升 Aux		14.5															
	小车运行 Crab travelling		44.6															
	大车运行 Crane travelling		84.7				112.5				87.6				101.4			
极限尺寸 limit dimension	S1		1040															
	S2		1850															
	S3		1500															
	S4		2310															
主要尺寸 main dimension	H	mm	2125				2215				2125		2127	2227		2215		
	H1		815				905				815				940			
	H2		80	180	240	388	538	688	838		80	180	240	390	540	690	840	
	H3		2500	2600	2660	2808	2958	3108	3258		2500	2600	2660	2810	2960	3110	3260	
	H4		1527				1437				1527	1525	1435		1437			
	K		2000															
	W		4000		4100		5000				4400					5000		
	B		5864		5928		6438				6278		6188			6798		
	b		230				260				230				260			
最大轮压 Max.Wheel Loading		kN	140	148	154	168	175	187	196	205	145	152	160	172	180	191	201	211
电机总功率 Total Power		kw	51.1			55.5					64.5			71.5				
荐用钢轨 Crane Rail Recommended			43kg/m或QU70															
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V															

QY型20/5t绝缘吊钩桥式起重机

QY Insulating Overhead Crane with Hook Cap. 20/5t

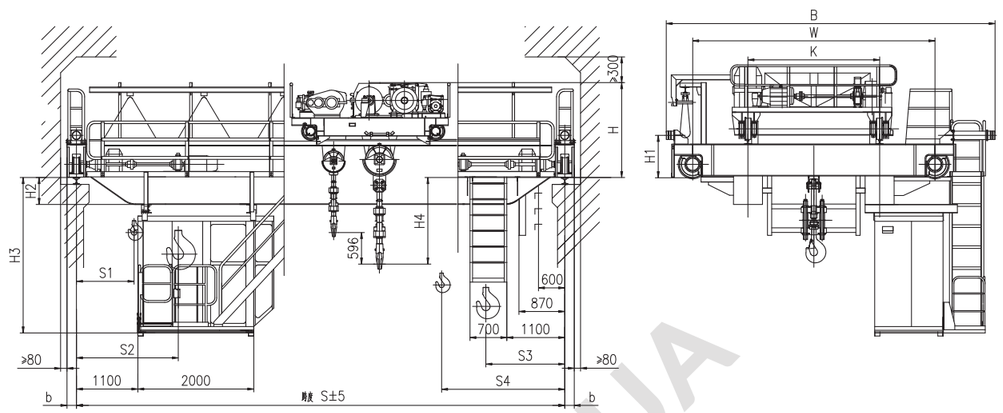


技术规格　Technical Specifications

起重量 Lifting capacity																	
	主钩 Main	t	20														
	副钩 Aux.		5														
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height	主钩 Main		12								12							
	副钩 Aux.		14								14							
工作制度 Duty			A5								A6							
速度 Speed	主起升 Main	m/min	7.2								9.7							
	副起升 Aux		12.7															
	小车运行 Crab travelling		44.6															
	大车运行 Crane travelling		84.7				112.5				87.6				101.4			
极限尺寸 limit dimension	S1		1030															
	S2		1930															
	S3		1420															
	S4		2320															
主要尺寸 main dimension	H	mm	2127				2217				2127	2129			2229			
	H1		815				905				815				940			
	H2		80	82	182	242	390	540	690	840	80	84	184	244	392	544	692	842
	H3		2500	2502	2602	2662	2810	2960	3110	3260	2500	2504	2604	2664	2812	2964	3112	3262
	H4		2097				2191				2097	2099			2189			
	K		2000															
	W		4000		4100		5000				4400					5000		
	B		5864		5928		6438				6278		6188			6798		
	b		230				260				230				260			
最大轮压 Max.Wheel Loading		kN	162	169	178	191	199	211	222	231	167	174	183	197	205	218	229	238
电机总功率 Total Power		kw	55.6			60					69			76				
荐用钢轨 Crane Rail Recommended			43kg/m或QU70															
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V															

WEIHUA

QY型32/5t绝缘吊钩桥式起重机

QY Insulating Overhead Crane with Hook Cap. 32/5t

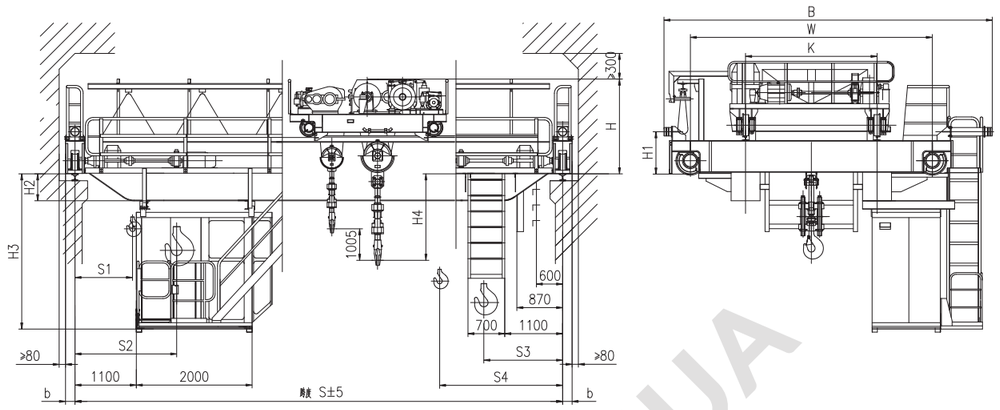


技术规格　Technical Specifications

起重量 Lifting capacity	主钩 Main / 副钩 Aux.	t	32 / 5															
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height	主钩 Main	m	16								16							
	副钩 Aux.	m	18								18							
工作制度 Duty			A5								A6							
速度 Speed	主起升 Main	m/min	7.5								9.5							
	副起升 Aux	m/min	12.7															
	小车运行 Crab travelling	m/min	42.4															
	大车运行 Crane travelling	m/min	87.6		74.2		74.6				101.4				101.8		86.8	
极限尺寸 limit dimension	S1	mm	1070															
	S2	mm	2050															
	S3	mm	1700															
	S4	mm	2680															
主要尺寸 main dimension	H	mm	2377	2379			2509				2377	2381			2511			
	H1	mm	905				1035				905				1070			
	H2	mm	90	94	244	264	414	564	714	814	90	94	244	264	414	564	714	814
	H3	mm	2510	2514	2664	2684	2834	2984	3134	3234	2510	2514	2664	2684	2834	2984	3134	3234
	H4	mm	1614	1611			1481				1614	1611			1481			
	K	mm	2500															
	W	mm	4650			4700		5000			4650			4700		5000		
	B	mm	6478			6628		6928			6588			6608		6828		
	b	mm	260			300					260			300				
最大轮压 Max.Wheel Loading		kN	236	250	262	277	289	305	316	327	240	254	267	284	296	311	321	333
电机总功率 Total Power		kw	78.3				87.3				96.3				96.3			
荐用钢轨 Crane Rail Recommended			QU70或方钢90															
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V															

QY型50/10t绝缘吊钩桥式起重机


QY Insulating Overhead Crane with Hook Cap. 50/10t

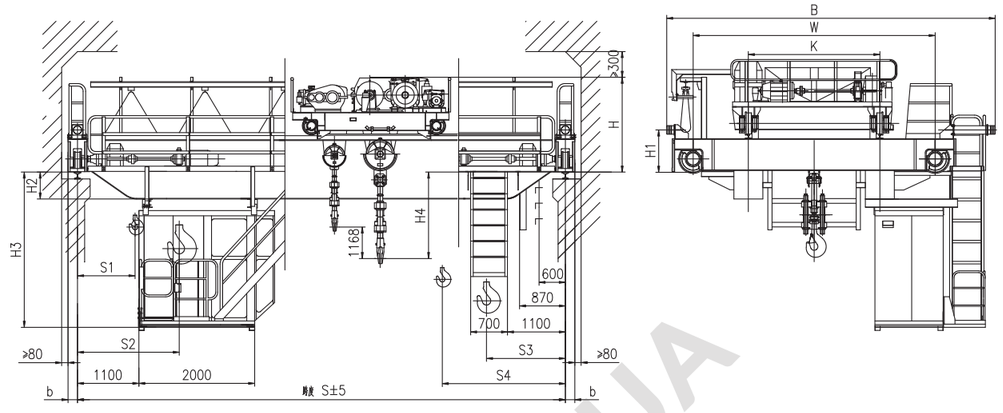


技术规格　Technical Specifications

起重量 Lifting capacity	主钩 Main / 副钩 Aux.	t	50 / 10															
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height	主钩 Main	m	12								12							
	副钩 Aux.	m	16								16							
工作制度 Duty			A5								A6							
速度 Speed	主起升 Main	m/min	5.9								7.8							
	副起升 Aux	m/min	13.2															
	小车运行 Crab travelling	m/min	38.5															
	大车运行 Crane travelling	m/min	74.6			85.9					86.8			87.3				
极限尺寸 limit dimension	S1	mm	1005															
	S2	mm	2200															
	S3	mm	2000															
	S4	mm	3195															
主要尺寸 main dimension	H	mm	2776			2782					2776	2778		2784				
	H1	mm	1055			1090					1055			1090				
	H2	mm	−79	96	102	252	402	552	702	802	−79	98	104	254	404	554	704	804
	H3	mm	2341	2516	2522	2672	2822	2972	3122	3222	2341	2518	2524	2674	2824	2974	3124	3224
	H4	mm	1920			1912					1920	1918		1912				
	K	mm	2500															
	W	mm	4800				5000				4800				5000			
	B	mm	6828			6858		7058			6828			6858		7058		
	b	mm	300															
最大轮压 Max.Wheel Loading		kN	332	354	373	385	404	421	434	449	335	357	377	395	410	427	440	455
电机总功率 Total Power		kw	115.5								131.5			139.5				
荐用钢轨 Crane Rail Recommended			QU80或方钢100															
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V															

WEIHUA

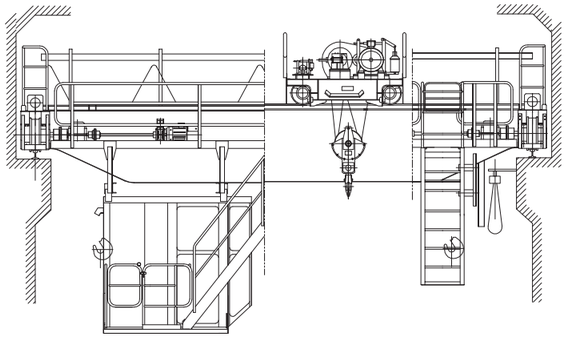

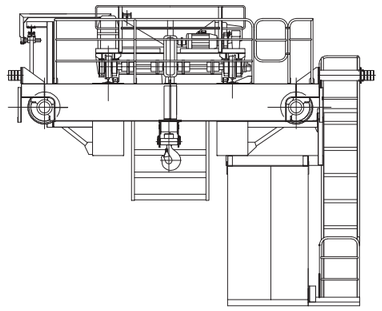

QB型5～100/30t防爆吊钩桥式起重机

QB OVERHEAD EXPLOSION-PROOF CRANE WITH HOOK CAP.5-100/30T

产品概述：

QB型防爆吊钩桥式起重机所有电机、电器防爆性能符合GB3836.2-2000《爆炸性气体环境用防爆电气设备第2部分：隔爆型"d"》、整机性能符合JB/T5897-2006《防爆桥式起重机》标准之规定，经国家指定的防爆产品检验单位检验合同，取得了《防爆合格证》。防爆标志分别为ExdIIBT4，ExdIICT4.

本产品适用于工厂内传爆能力不高于ⅡB或ⅡC级，引燃温度组别为T1~T4组的可燃性气体或蒸气与空气形成的爆炸性气体混合物的场所，适用于危险区域为1区或2区（详见GB3836.1—2000）。

本产品工作级别为中级。

Product Introduction:


The explosion-proof performance of all electrial machines and electric appliances of QB model explosion-proof overhead crane with hook conforms to the prescriptions of GB3836.2-2000 Explosion-proof electrical Apparatus for Explosive Atmosphere Part two: Flameproof Type; the performance of complete machine conforms to the prescriptions of JB/T5897-2006 Explosion-proof Bridge Crane. The crane is qualified inspected by inspection unit of blast-proof product which is appointed by the state. The crane has got Certification of Conformity of An Instrument for Explosive Atmosphere. The signs of explosion-proof are Exd ⅡBT4 and Exd ⅡCT4 respectively.

The product is applicable to the place in the factory where the capability of transmitting explosive is no higher than grade ⅡB or ⅡC, and where has mixture of detonating gas which is composed of flammable gas or steam whose ignition temperature team belongs to T1~T4 team, and air. The applicable danger area is Area 1 or Area 2(see GB3836.1-2000).

The working class is middle.

QB型5～10t防爆吊钩桥式起重机

QB Overhead explosion-proof Crane with Hook Cap. 5-10t

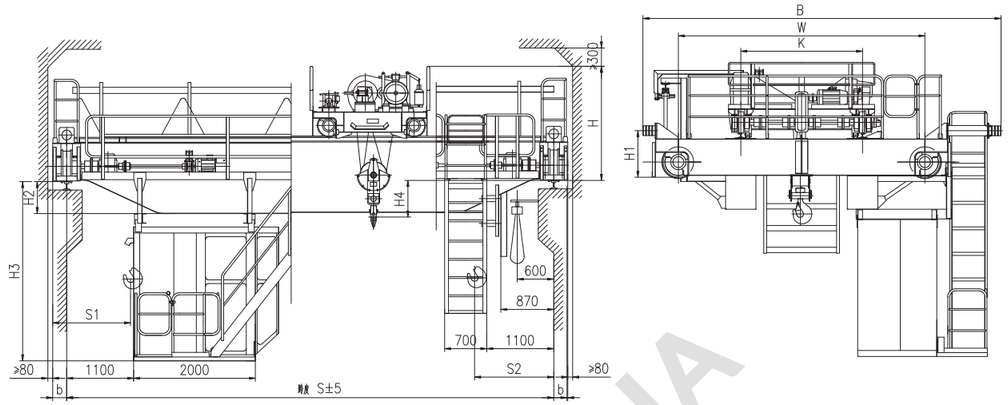


技术规格　Technical Specifications

起重量 Lifting capacity		t	5								10							
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			16								16							
工作制度 Duty			A4								A4							
防爆等级 Explosion-proof grade			ExdⅡBT4 (ExdⅡCT4)								ExdⅡBT4 (ExdⅡCT4)							
速度 Speed	起升 Hoisting	m/min	5								5							
	小车运行 Crab travelling		19.6(14.6)								20.5(14.6)							
	大车运行 Crane travelling		22.3(12)								22.3(12)							
极限尺寸 limit dimension	S1	mm	800								1050							
	S2		1250								1300							
主要尺寸 main dimension	H		1763								1800							
	H1		765								765							
	H2		−24	126	226	376	526	676	826	976	−24	126	226	376	526	678	828	978
	H3		2396	2546	2646	2796	2946	3096	3246	3396	2396	2546	2646	2796	2946	3098	3248	3398
	H4		71								602					552		
	K		1400								2000							
	W		3400			3550		5000			4050					5000		
	B		5054			5204		5948			5704			5882		5948		
	b		230															
最大轮压 Max.Wheel Loading		kN	72	78	84	92	97	109	117	124	101	108	117	122	126	135	144	152
电机总功率 Total Power		kw	10								15.5							
荐用钢轨 Crane Rail Recommended			43kg/m															
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V															

QB型16/3.2~20/5t防爆吊钩桥式起重机

QB Overhead explosion-proof Crane with Hook Cap. 16/3. 2-20/5t

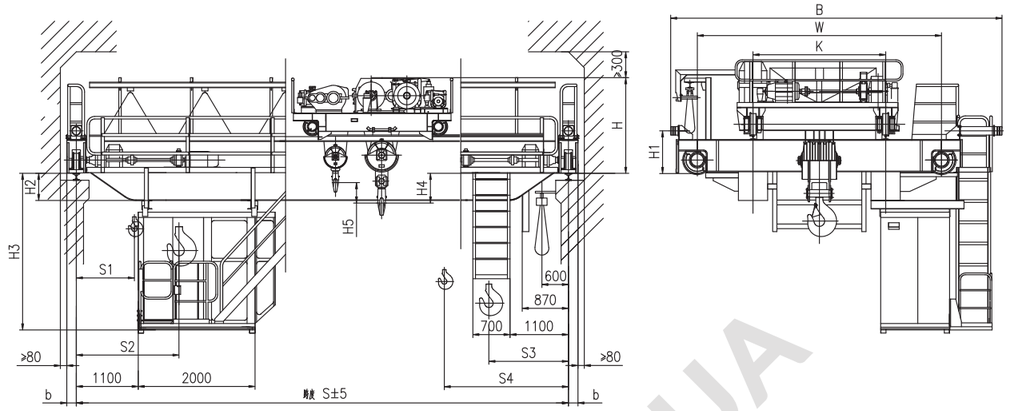


技术规格 Technical Specifications

起重量 Lifting capacity	主钩 Main	t	16								20							
	副钩 Aux.		3.2								5							
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height	主钩 Main		16								12							
	副钩 Aux.		18								14							
工作制度 Duty			A4								A4							
防爆等级 Explosion-proof grade			ExdIIBT4 (ExdIICT4)								ExdIIBT4 (ExdIICT4)							
速度 Speed	主起升 Main	m/min	4.3								4.2							
	副起升 Aux		5.6								5							
	小车运行 Crab travelling		20.5(13)								20.5(13)							
	大车运行 Crane travelling		19（12.1）								19（12.1）							
极限尺寸 limit dimension	S1		1040								1030							
	S2		1850								1930							
	S3		1500								1420							
	S4		2310								2320							
主要尺寸 main dimension	H	mm	2043		2043						2045		2045					
	H1		765		765						765		765					
	H2		130	230	380	528	678	828	978		130	232	382	530	680	830	980	
	H3		2550	2650	2800	2948	3098	3248	3398		2550	2598	2658	2808	2958	3108	3258	
	H4		860		780						858		858					
	H5		770								496							
	K		2000															
	W		4000		4100		5000				4000		4100		5000			
	B		5864		5928		6438				5864		5928		6438			
	b		230		230						230		230					
最大轮压 Max.Wheel Loading		kN	138	146	152	166	173	185	194	203	160	167	176	189	197	209	220	229
电机总功率 Total Power		kw	23.9(23.2)								25.7(25)							
荐用钢轨 Crane Rail Recommended			43kg/m或QU70															
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V															

QB型32/5~50/10t防爆吊钩桥式起重机

QB Overhead explosion-proof Crane with Hook Cap. 32/5-50/10t

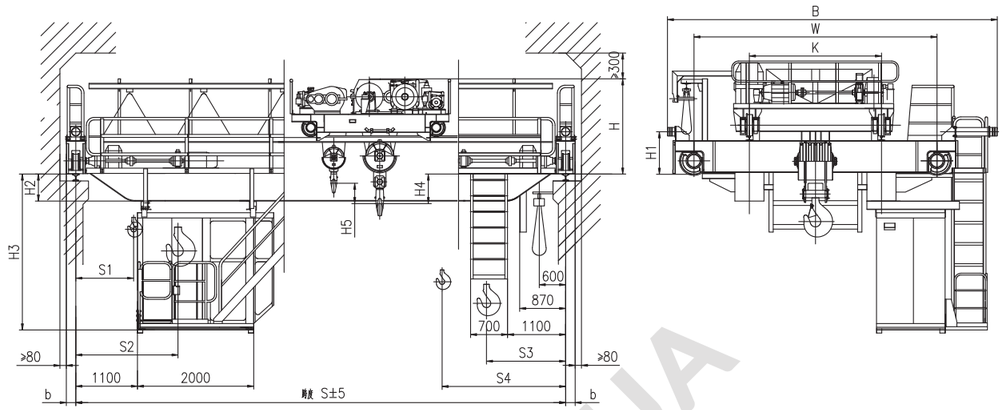


技术规格 Technical Specifications

起重量 Lifting capacity	主钩 Main	t	32								50							
	副钩 Aux.		5								10							
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height	主钩 Main		16								12							
	副钩 Aux.		18								16							
工作制度 Duty			A4								A4							
防爆等级 Explosion-proof grade			ExdIIBT4 (ExdIICT4)								ExdIIBT4 (ExdIICT4)							
速度 Speed	主起升 Main	m/min	4.1								3							
	副起升 Aux		5								5							
	小车运行 Crab travelling		17.5(13)								15.1(15.1)							
	大车运行 Crane travelling		19.1(12.4)								17(14.5)							
极限尺寸 limit dimension	S1		1070								1005							
	S2		2050								2200							
	S3		1700								2000							
	S4		2680								3195							
主要尺寸 main dimension	H	mm	2230								2365	2371						
	H1		815								865							
	H2		180	184	334	484	634	784	934	1034	71	246	252	402	552	702	852	952
	H3		2508	2512	2662	2682	2832	2982	3132	3232	2339	2514	2520	2670	2820	2970	3120	3220
	H4		800								1020	1014						
	H5		790								948							
	K		2500															
	W		4650		4700		5000				4800				5000			
	B		6478		6628		6928				6828	6858			7058			
	b		230								260							
最大轮压 Max.Wheel Loading		kN	234	248	260	275	287	303	314	325	326	348	367	379	398	415	428	443
电机总功率 Total Power		kw	42.2(40.7)								50.9(49.1)	53.9(49.1)						
荐用钢轨 Crane Rail Recommended			QU70或方钢90								QU80或方钢100							
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V															

WEIHUA

QB型75/20t防爆吊钩桥式起重机

QB Overhead explosion-proof crane with hook Cap.75/20t

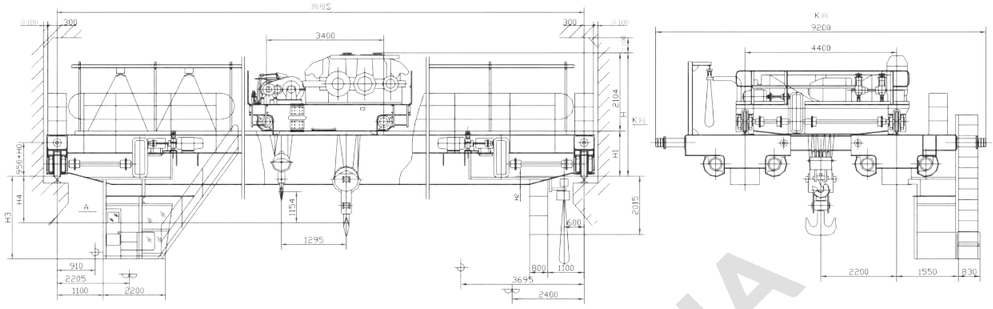


技术规格　Technical Specifications

起重量 Lifting capacity		t	75/20						
跨度 Span		m	13.5	16.5	19.5	22.5	25.5	28.5	31.5
最大起升高度 Max.Lifting Height		m	20/22						
工作级别 Working system			A4						
防爆级别 Explosion-proof grade			ExdⅡBT4；　(ExdⅡCT4)						
速度Speed	主起升 Main lifting	m/min	1.86						
	副起升 Aux lifting		4.2						
	小车运行 trolley travelling		10						
	大车运行 crane travelling		15.4；　(9.88)				15.7 (9.9)		
电动机Motor	起升 lifting	Type Kw	YBZ250M-8/30（YBZE250M-8）						
	副起升 Aux lifting		YBZ180L-6/15（YBZE180L-6）						
	小车运行 trolley travelling		YBZE132M2-6/3.7						
	大车运行 crane travelling		YBZE132M2-6/3.7×2				YBZE160M1-6/5.5×2 YBZE132M2-6/3.7×2		
主要尺寸 (mm)Dimensions	H	mm	3302	3302	3302	3306	3304	3308	3310
	H1		1318	1318	1318	1322	1320	1324	1326
	H2		290	440	542	546	844	844	850
	H3		2710	2860	2962	2966	3264	3268	3270
	H4		872	872	872	868	870	866	864
最大轮压 Max wheel load		KN	219	302	314	324	333	345	356
荐用钢轨 Steel track		Kg/m	QU100						
电源Power source			三相交流　380V　50HZ　3-Phase A.C.　380V 50HZ						
注：1、H0为大车缓冲器增加的高度									

QB型100/30t防爆吊钩桥式起重机

QB Overhead explosion-proof crane with hook Cap. 100/30t

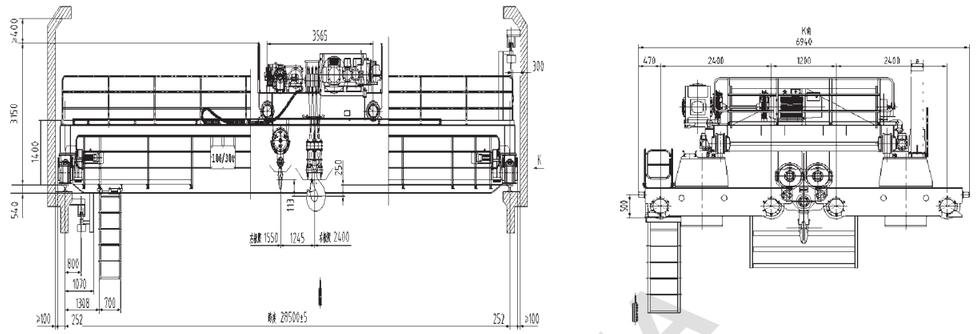


技术规格　Technical Specifications

起重量　Lifting Capacity		t	100/30
跨度　Span		m	28.5
最大起升高度 Max Lifting Height		m	13/14
工作级别　Duty Classification			A4
防爆级别　Explosion-Proof Grade			ExdⅡBT4；　（ExdⅡCT4）
速度 Speed	主起升　Main Lifting	m/min	0.3~3
	副起升　Aux Lifting		0.3~3
	小车运行　Cross Travel		0.5~5
	大车运行　Crane Travelling		0.5~10
总功率　Total Power		kw	105.2
最大轮压　Maximum Wheel Load		kN	361
荐用钢轨　Steel Track		kg/m	QU100
电源　Power Source			3P　A.C　50Hz　380V

WEIHUA

QB型5～10t新型防爆吊钩桥式起重机

QB Overhead explosion-proof crane with hook Cap.5-10t

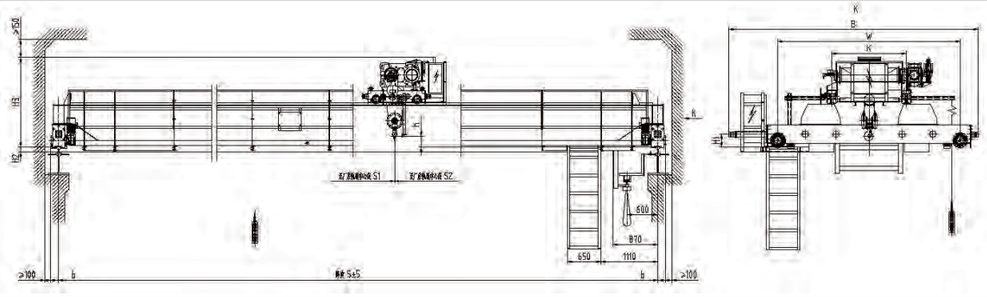

技术规格　Technical Specifications

起重量 Lifting Capacity	主钩Main	t	5								10							
	副钩Aux		——								——							
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			18								18							
			——								——							
工作制度Working Duty			A5								A5							
防爆等级Explosion-proof Grade			ExdⅡBT4 (ExdⅡCT4)								ExdⅡBT4 (ExdⅡCT4)							
速度 Speed	主钩Main	m/min	0.57~5.7								0.6~6							
	副钩Aux		——								——							
	小车运行 Trolley Travelling		1.6~16								1.6～16							
	大车运行 Crane Travelling		1.6~16								1.6～16							
极限尺寸 Limit Dimension	S1	mm	1065								1150							
	S2		1445								1450							
	L		——								——							
	h		64	64	84	84	209	259	261	261	-51	-31	-31	19	69	71	75	75
	h1		——								——							
主要尺寸 Main dimension	H1		200				250				250							
	H2		100	150	130	124	105	155	205	255	75	105	155	105	155	205	255	355
	H3		1800	1800	1820	1820	1950	2000	2000	2000	1900	1920	1920	1970	2030	2030	2030	2030
	B		4644				4844				5180							
	W		3250				3550				3800							
	K		1450								1700							
	b		145				150				150							
最大轮压 Max.Wheel Loading		KN	45	48	53	56	62	67	74	78	72	77	81	87	92	98	104	111
电机总功率 Tatal Power		KW	7.7				8.1				13.2			13.6				
荐用钢轨 Crane Rail Recommended			38kg/m								38kg/m							
电源 Power Supply			三相交流　50Hz　380V								三相交流　50Hz　380V							

备注：　1、表中速度为公称速度，电机、减速器厂家不同有适当差异。


2、表中吊钩中心高h值为负值时表示在大车轨道面以下。

Remarks：1、The speed in the table is nominal speed, there are some differences of motor and reducer because of different manufacturers.

2、In the table, if center height (h value) of hook is negative, this shows it is below the crane rail.

QB型16~20t新型防爆吊钩桥式起重机

QB Overhead explosion-proof crane with hook Cap.16-20t

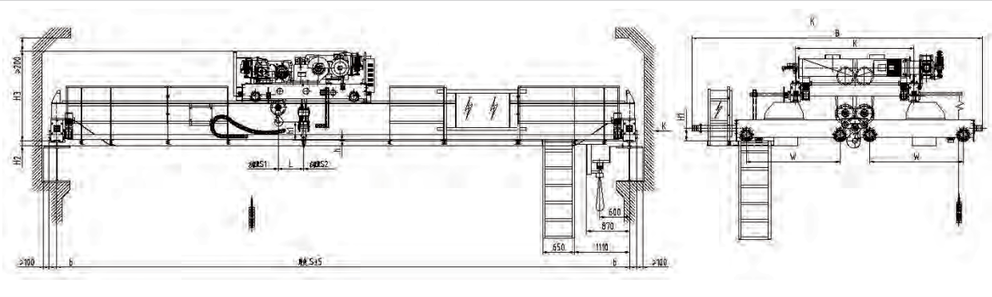

技术规格　Technical Specifications

起重量 Lifting Capacity	主钩Main	t	16								20							
	副钩Aux		5								5							
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			18								18							
			18								18							
工作制度Working Duty			A5								A5							
防爆等级Explosion-proof Grade			ExdⅡBT4 (ExdⅡCT4)								ExdⅡBT4 (ExdⅡCT4)							
速度 Speed	主钩Main	m/min	0.3~3								0.3~3							
	副钩Aux		0.57～5.7								0.57～5.7							
	小车运行 Trolley Travelling		1.6～16								1.6～16							
	大车运行 Crane Travelling		1.6～16								1.6～16							
极限尺寸 Limit Dimension	S1	mm	1128								1128							
	S2		1678								1678							
	L		519								519							
	h		-85	-185	-35	15	19	19	19	119	-103	-99	-49	1	5	5	5	105
	h1		366								384							
主要尺寸 Main dimension	H1		250								250							
	H2		105	105	105	205	255	355	455	355	105	155	105	205	255	355	455	455
	H3		2113	2113	2163	2213	2217	2217	2217	2317	2113	2117	2167	2217	2221	2221	2221	2321
	B		5880								5880							
	W		1900								1900							
	K		2400								2400							
	b		170								170							
最大轮压 Max.Wheel Loading		KN	56	60	63	66	71	73	77	81	65	69	72	76	81	85	88	92
电机总功率 Tatal Power		KW	19.8			20.6					19.8			20.6				
荐用钢轨 Crane Rail Recommended			43kg/m								43kg/m							
电源 Power Supply			三相交流　50Hz　380V								三相交流　50Hz　380V							

备注：　1、表中速度为公称速度，电机、减速器厂家不同有适当差异。


2、表中吊钩中心高h值为负值时表示在大车轨道面以下。

Remarks：1、The speed in the table is nominal speed, there are some differences of motor and reducer because of different manufacturers.

2、In the table, if center height (h value) of hook is negative, this shows it is below the crane rail.

QB型32~50t新型防爆吊钩桥式起重机

QB Overhead explosion-proof crane with hook Cap.32-50t

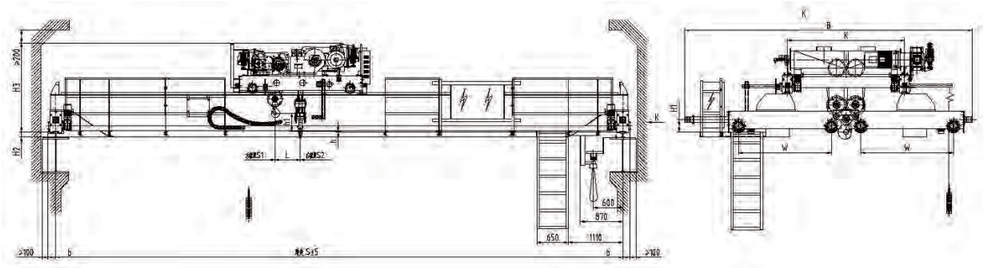

技术规格　Technical Specifications


起重量 Lifting Capacity	主钩Main	t	32								50							
	副钩Aux		5								10							
跨度 Span	S	m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			18								18							
			18								18							
工作制度Working Duty			A5								A5							
防爆等级Explosion-proof Grade			ExdⅡBT4 (ExdⅡCT4)								ExdⅡBT4 (ExdⅡCT4)							
速度 Speed	主钩Main	m/min	0.24～2.4								0.24～2.4							
	副钩Aux		0.57～5.7								0.6～6							
	小车运行 Trolley Travelling		1.6～16								1.6～16							
	大车运行 Crane Travelling		1.6～16								1.6～16							
极限尺寸 Limit Dimension	S1	mm	1100								1200							
	S2		1900								2000							
	L		575								596							
	h		170	166	116	116	116	12	-10.5	-16.5	292	288	288	284	180	180	180	76
	h1		605								576							
主要尺寸 Main Dimension	H1	mm	250								250							
	H2		105	105	205	355	455	455	532.5	632.5	132.5	232.5	332.5	432.5	432.5	532.5	632.5	632.5
	H3		2279	2283	2333	2333	2333	2437	2460	2466	2384	2388	2388	2392	2496	2496	2496	2600
	B		6280						6562		6962							
	W		1900						2000		2000							
	K		2400								3300							
	b		175								190							
最大轮压 Max.Wheel Loading		KN	97	101	107	111	116	122	129	132	141	150	155	162	170	175	181	188
电机总功率 Tatal Power		KW	24.6						27.1		40.4				43.4			
荐用钢轨 Crane Rail Recommended			43kg/m								43kg/m							
电源 Power Supply			三相交流　50Hz　380V								三相交流　50Hz　380V							

备注：　1、表中速度为公称速度，电机、减速器厂家不同有适当差异。

2、表中吊钩中心高h值为负值时表示在大车轨道面以下。

Remarks：1、The speed in the table is nominal speed, there are some differences of motor and reducer because of different manufacturers.

2、In the table, if center height (h value) of hook is negative, this shows it is below the crane rail.

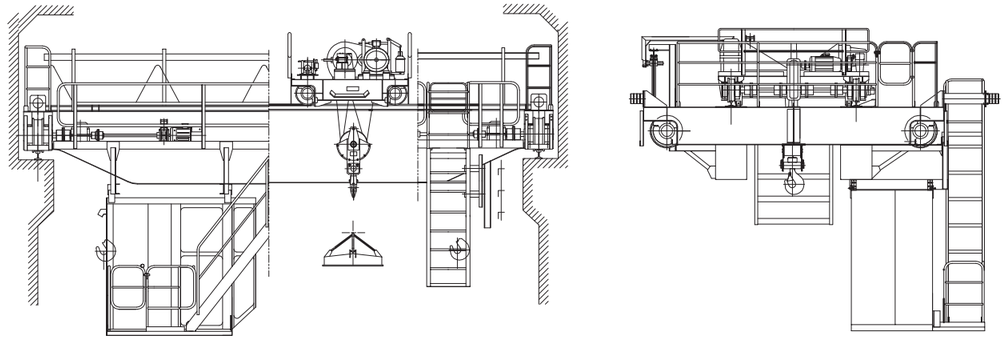

QC型5~50/10t电磁桥式起重机

QC OVERHEAD CRANE WITH MAGNET CAP. 5-50/10T

产品概述：

1、司机室平台入口方向分为侧面入口、端面入口和顶面入口三种。

2、司机室可以左端安装也可以右端安装。

3、起重量包括电磁盘自重。

4、起重量总重不包括电磁盘及其附件重量。

Product Introduction:

1、There are three kinds of method for entering the platform of cab from the side, from the end and from the top.


2. The cab can be either fixed at the left end or at the right end

3. The lifting capacity includes the dead weight of electmagnetic disk.

4. The crane total weight not includes the dead weight of electromagnetic disk and its auxilliary facilities.

QC型5～10t电磁桥式起重机

QC Overhead Crane with magnet Cap. 5-10t

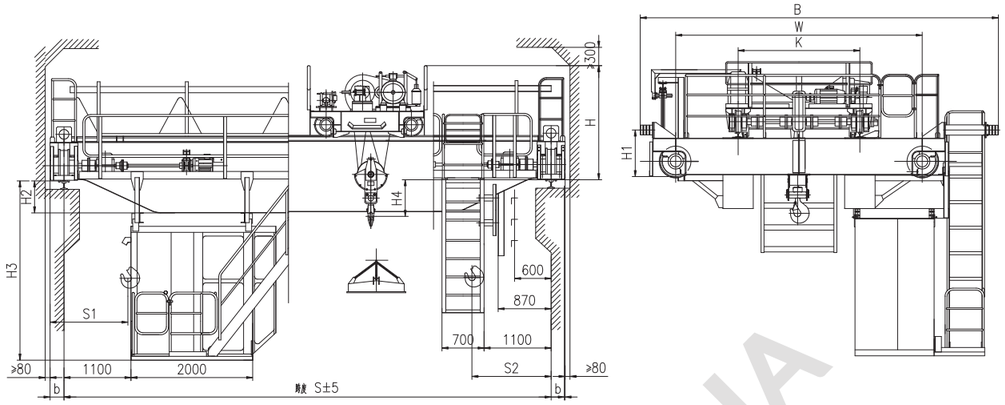


技术规格 Technical Specifications

起重量 Lifting capacity		t	5								10							
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			16								16							
工作制度 Duty			A6								A6							
速度 Speed	起升 Hoisting	m/min	15.5								10.4							
	小车运行 Crab travelling		37.2								39.5							
	大车运行 Crane travelling		115.6				116.8				115.6				116.8		112.5	
极限尺寸 limit dimension	S1		1250								1500							
	S2		1500															
主要尺寸 main dimension	H	mm	1765								1878						1928	
	H1		765				800				765				850			
	H2		-22	128	228	378	528	678	828	978	-22	128	228	378	528	630	780	930
	H3		2398	2548	2648	2798	2948	3098	3248	3398	2398	2548	2648	2798	2948	3050	3200	3350
	H4		69								600						550	
	K		1400								2000							
	W		3400		3550		5000				4050				5000			
	B		5058		5208		6028				5708		5848		6388			
	b		230															
最大轮压 Max.Wheel Loading		kN	74.5	80	86.5	94	101.5	113	121.5	128.5	104	112	121	126	134	146	155	165
电机总功率 Total Power		kw	27.8				31.8				35.5			39.5				
荐用钢轨 Crane Rail Recommended			43kg/m															
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V															

QC型16/3.2~20/5t电磁桥式起重机

QC Overhead Crane with magnet Cap. 16/3. 2-20/5t

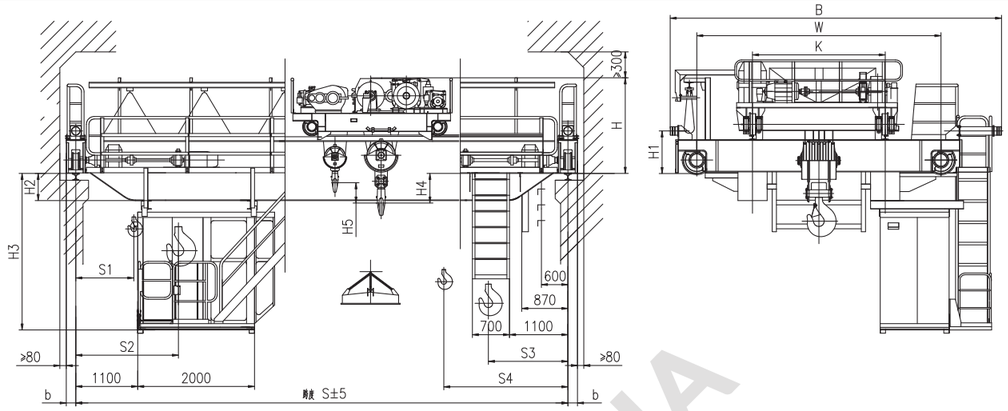


技术规格 Technical Specifications

起重量 Lifting capacity	主钩 Main	t	16								20							
	副钩 Aux.		3.2								5							
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height	主钩 Main		16								12							
	副钩 Aux.		18								14							
工作制度 Duty			A6								A6							
速度 Speed	主起升 Main	m/min	13								9.7							
	副起升 Aux		14.5								12.7							
	小车运行 Crab travelling		44.6															
	大车运行 Crane travelling		112.5			101.4					112.5			101.4				
极限尺寸 limit dimension	S1		1040								1070							
	S2		2460								2650							
	S3		1600								1700							
	S4		3020								3280							
主要尺寸 main dimension	H	mm	2097		2099	2189		2187			2099		2101		2191			
	H1		815			940					815			940				
	H2		82		182	242	392	542	692	842	82	86	186	246	394	544	694	844
	H3		2502		2602	2662	2812	2962	3112	3262	2502	2506	2606	2666	2814	2964	3114	3264
	H4		727	725		635		637			699	697		607				
	H5		768								496							
	K		2000															
	W		4400				5000				4400					5000		
	B		6278			6188		6798			6278			6188		6798		
	b		230			260					230			260				
最大轮压 Max.Wheel Loading		kN	146	153	161	174	182	193	204	214	170	177	187	201	210	223	234	245
电机总功率 Total Power		kw	64.5			71.5					69			76				
荐用钢轨 Crane Rail Recommended			43kg/m或QU70															
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V															

WEIHUA


QC型32/5~50/10t电磁桥式起重机

QC Overhead Crane with magnet Cap. 32/5-50/10t

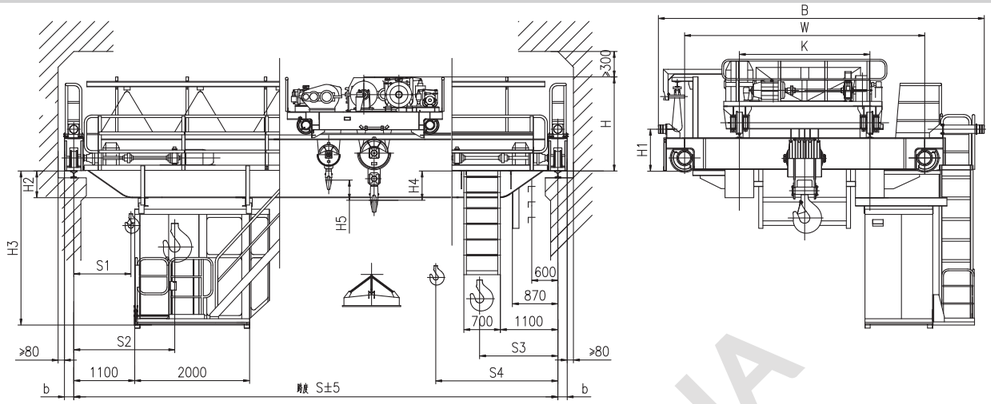


技术规格　Technical Specifications

起重量 Lifting capacity	主钩 Main	t	32								50							
	副钩 Aux.		5								10							
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height	主钩 Main		16								12							
	副钩 Aux.		18								16							
工作制度 Duty			A6								A6							
速度 Speed	主起升 Main	m/min	9.5								7.8							
	副起升 Aux		12.7								13.2							
	小车运行 Crab travelling		42.4								38.5							
	大车运行 Crane travelling		101.4			101.8			86.8		86.8				87.3			
极限尺寸 limit dimension	S1	mm	1070								1005							
	S2		2650								2785							
	S3		1700								2000							
	S4		3280								3780							
主要尺寸 main dimension	H		2349	2353		2483					2746	2748		2754				
	H1		905			1070					1055			1090				
	H2		92	96	246	266	416	566	716	816	71	248	254	404	554	704	804	954
	H3		2512	2516	2666	2686	2836	2986	3136	3236	2491	2668	2674	2824	2974	3124	3224	3374
	H4		705	701		571					1020	1018		1012				
	H5		790								948							
	K		2500															
	W		4650			4700		5000			4800					5000		
	B		6588			6608		6828			6828			6858		7058		
	b		260			300					300							
最大轮压 Max.Wheel Loading		kN	242	256	269	286	298	313	323	335	337	359	379	397	412	429	442	457
电机总功率 Total Power		kw	96.3					96.3			131.5			139.5				
荐用钢轨 Crane Rail Recommended			QU70或方钢90								QU80或方钢100							
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V															

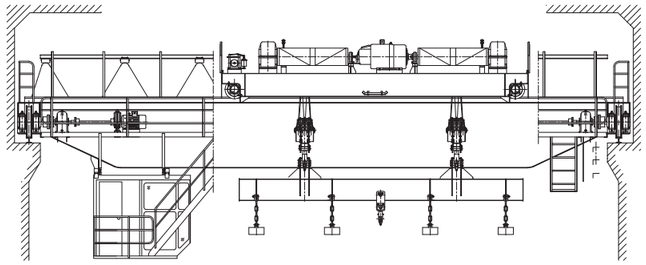

挂梁平行于主梁

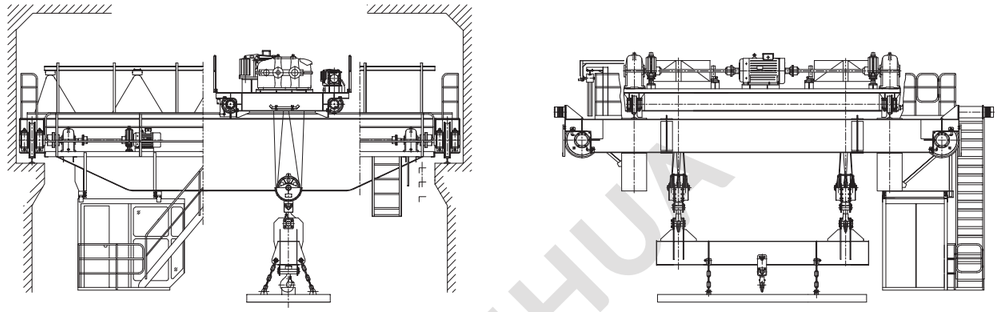

挂梁垂直于主梁

挂梁桥式起重机

OVERHEAD CRANE WITH CARRIER-BEAM

产品概述：


1、本起重机带有可拆卸的电磁盘，特别适用于搬运具有导磁性的黑色金属制品与材料如钢锭、型钢、生铁块等。主要用于钢铁企业轧线、成品库，船厂钢料堆场、下料车间等。
2、本起重机起重量包含电磁铁自重。起重机总重不包含电磁铁自重。


Product Introduction:

1. the crane has the knock-down electromaqnetic disk. It is especially applicable to transmit the black-metallic products and materials of magnetoconductivity, such as steel ingot、profiled bar and pig iron block , etc. the crane is widely used in steel rolling lines of steel company storage shipyard and workshop etc.
2. This type of crand The lifting capacity include the weight of the carrier-beam.But The total weight does't include the weight of the carrier-beam.

15t、20t挂梁桥式起重机（垂直主梁）

15t、20t Overhead Crane with Carrier-beam

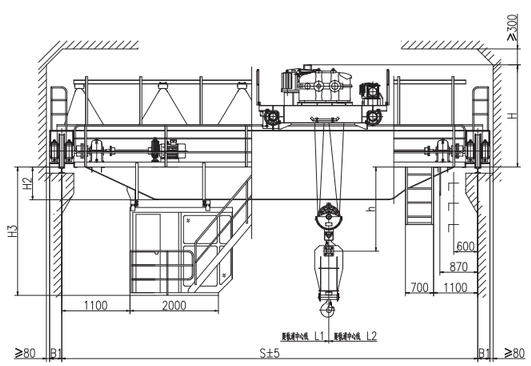

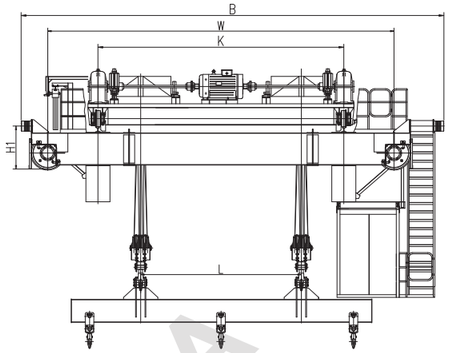



技术规格　Technical Specifications

起重量 Lifting capacity		t	7.5+7.5					10+10				
跨度 Span		m	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16					16				
工作制度 Duty			A6					A6				
速度 Speed	起升 Hoisting	m/min	13.2					12.6				
	小车运行 Crab travelling		36.7					36.2				
	大车运行 Crane travelling		101.4					89				
极限尺寸 limit dimension	L	mm	3000					4000				
	L1		1500					1500				
	L2		1500					1500				
	h		441				341	439				339
主要尺寸 main dimension	H		2188				2288	2290				2390
	H1		940				1040	940				1040
	H2		390	540	690	840		392	542	692	842	
	H3		2810	2960	3110	3260		2812	2962	3112	3262	
	K		5000					6000				
	W		7400	8000				8400	9000			
	B		9234	9844				10234	10844			
	B1		260					260				
最大轮压 Max.Wheel Loading		kN	190	202	212	220	229	220	230	244	251	260
电机总功率 Total Power		kw	63					71				
荐用钢轨 Crane Rail Recommended			43kg/m 或 QU70									
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V									

32t、40t挂梁桥式起重机（垂直主梁）

32t、40t Overhead Crane with Carrier-beam

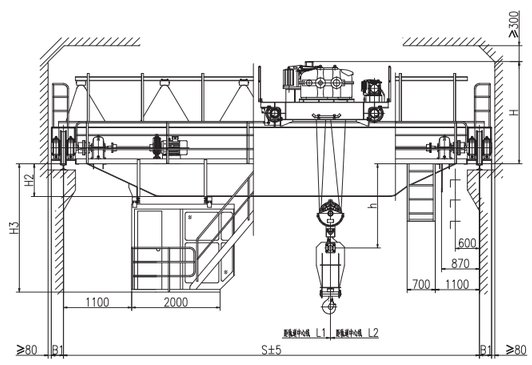

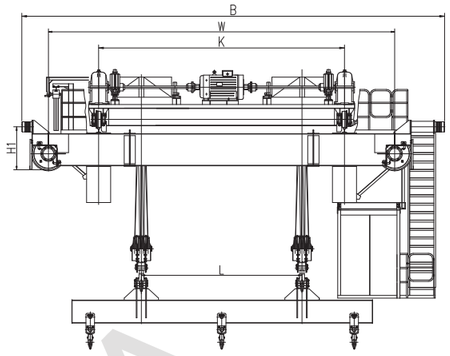


技术规格　Technical Specifications

起重量 Lifting capacity		t	16+16					20+20				
跨度 Span		m	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			15					16				
工作制度 Duty			A6					A6				
速度 Speed	起升 Hoisting	m/min	12.5					11.7				
	小车运行 Crab travelling		37					37.5				
	大车运行 Crane travelling		87.3					87.3				
极限尺寸 limit dimension	L	mm	4000					4000				
	L1		1700					1600				
	L2		1700					1800				
	h		690				590	668				566
主要尺寸 main dimension	H		2538				2638	2640				2742
	H1		1070				1170	1130				1230
	H2		418	568	718	818		400	550	700	800	802
	H3		2838	2988	3138	3238		2820	2970	3020	3220	3222
	K		6000					6500				
	W		8300	8500				8800	9000			
	B		10258	10478				10930	11130	11062		
	B1		300					300				
最大轮压 Max.Wheel Loading		kN	313	330	343	355	365	353	369	381	397	414
电机总功率 Total Power		kw	111.3					128.5	142.5			
荐用钢轨 Crane Rail Recommended			43kg/m 或 QU70					QU100				
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V									

WEIHUA

15t、20t挂梁桥式起重机（平行主梁）

15t、20t Overhead Crane with Carrier-beam

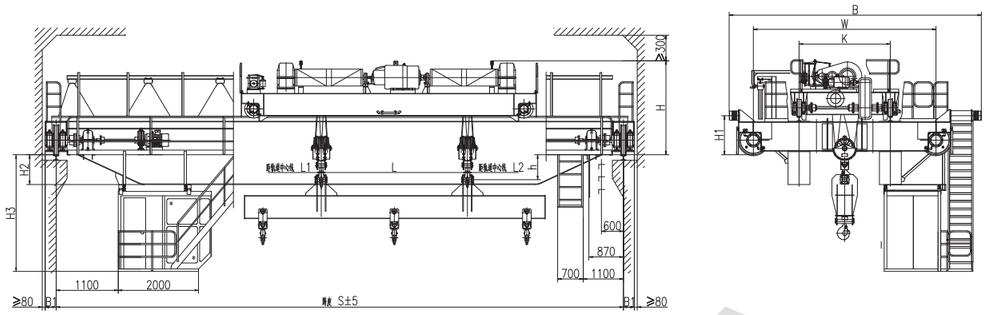


技术规格　Technical Specifications

起重量 Lifting capacity		t	7.5+7.5					10+10				
跨度 Span		m	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16					16				
工作制度 Duty			A6					A6				
速度 Speed	起升 Hoisting	m/min	13.2					12.6				
	小车运行 Crab travelling		36.7					36.2				
	大车运行 Crane travelling		101.4					89				
极限尺寸 limit dimension	L	mm	3000					4000				
	L1		2250					2250				
	L2		2000					2000				
	h		443				343	441				341
主要尺寸 main dimension	H		2206				2306	2308				2408
	H1		940				1040	940				1040
	H2		388	538	688	838		390	540	690	840	
	H3		2808	2958	3108	3258		2810	2960	3110	3260	
	K		2000					2500				
	W		4400	5000				4900	5500			
	B		6234	6844				6734	7344			
	B1		260					260				
最大轮压 Max.Wheel Loading		kN	190	202	212	220	229	210	222	233	241	248
电机总功率 Total Power		kw	63					71				
荐用钢轨 Crane Rail Recommended			43kg/m 或 QU70									
电源 Power Supply			三相交流 3–Phase A.C.50Hz 380V									

32t、40t挂梁桥式起重机（平行主梁）

32t、40t Overhead Crane with Carrier-beam

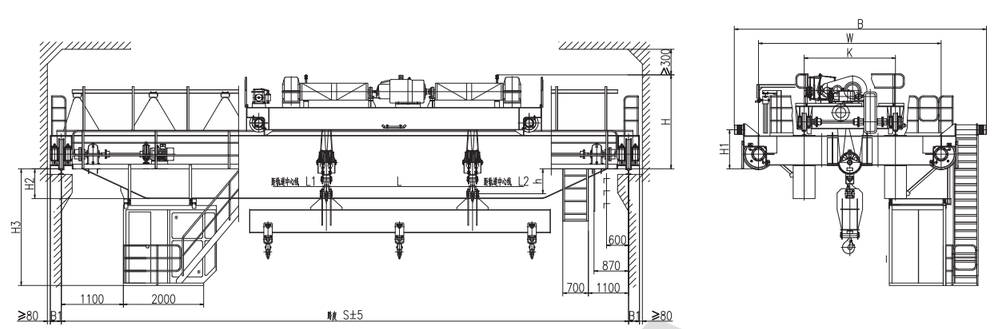


技术规格　Technical Specifications

起重量 Lifting capacity		t	16+16					20+20				
跨度 Span		m	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			15					16				
工作制度 Duty			A6					A6				
速度 Speed	起升 Hoisting	m/min	12.5					11.7				
	小车运行 Crab travelling		37					37.5				
	大车运行 Crane travelling		87.3					87.3				
极限尺寸 limit dimension	L	mm	4000					4000				
	L1		2350					2650				
	L2		2100					2400				
	h		494				390	470				368
主要尺寸 main dimension	H		2624				2728	2752				2854
	H1		1070				1170	1130				1230
	H2		414	564	714	814	818	398	548	698	798	800
	H3		2834	2984	3134	3234	3238	2818	2968	3018	3218	3220
	K		3000					3000				
	W		5300	5500				5300	5500			
	B		7258	7478				7430	7630	7562		
	B1		300					300				
最大轮压 Max.Wheel Loading		kN	298	314	323	336	344	324	340	349	364	373
电机总功率 Total Power		kw	111.3					128.5		142.5		
荐用钢轨 Crane Rail Recommended			43kg/m 或 QU70					QU100				
电源 Power Supply			三相交流 3–Phase A.C.50Hz 380V									

WEIHUA

15t电磁挂梁桥式起重机（挂梁平行主梁）

15t Electromagnetic Overhead Crane with Carrier-beam

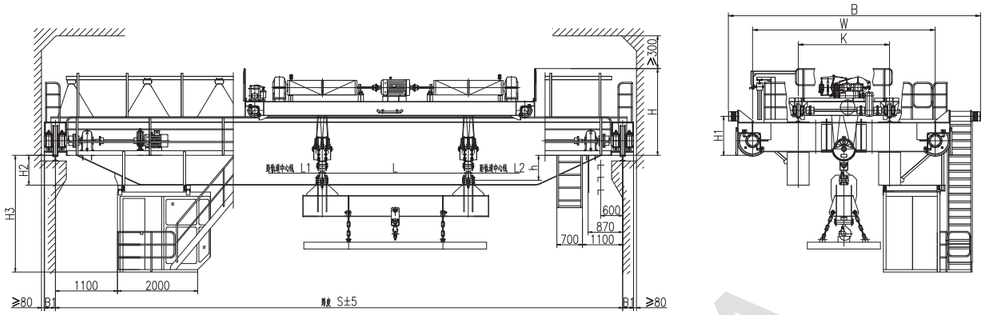



技术规格　Technical Specifications

起重量 Lifting capacity		t	15									
跨度 Span		m	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16					16				
工作制度 Duty			A6					A7				
速度 Speed	起升 Hoisting	m/min	13.2					15.8				
	小车运行 Crab travelling		36.7					36.6				
	大车运行 Crane travelling		101.4					103.9				
极限尺寸 limit dimension	L	mm	3000					4000				
	L1		2250					2250				
	L2		2000					2000				
	h		443				343	750				
主要尺寸 main dimension	H		2208				2308	2290				2390
	H1		940				1040	940				1040
	H2		390	540	690	840		392	542	692	842	
	H3		2810	2960	3110	3260		2812	2962	3112	3262	
	K		2000					2500				
	W		4400	5000				4900	5500			
	B		6234	6844				6784	7394	7464		
	B1		260					260				
最大轮压 Max.Wheel Loading		kN	175	190	203	215	230	205	218	230	237	250
电机总功率 Total Power		kw	63					79.5				
荐用钢轨 Crane Rail Recommended			43kg/m 或 QU70									
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V									

20t电磁挂梁桥式起重机（挂梁平行主梁）

20t Electromagnetic Overhead Crane with Carrier-beam

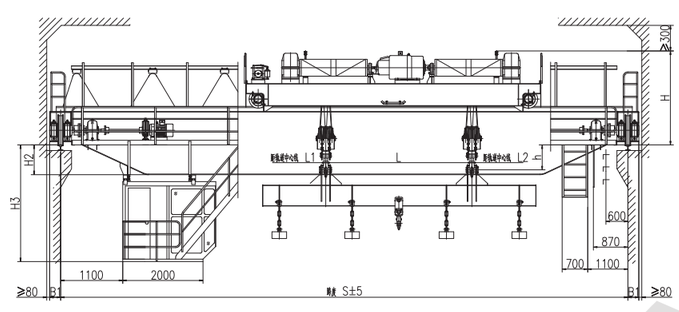




技术规格　Technical Specifications

起重量 Lifting capacity		t	20									
跨度 Span		m	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16					15				
工作制度 Duty			A6					A7				
速度 Speed	起升 Hoisting	m/min	12.6					15.8				
	小车运行 Crab travelling		36.2					42.8				
	大车运行 Crane travelling		89					103.9				
极限尺寸 limit dimension	L	mm	4000					4000				
	L1		2250					2350				
	L2		2000					2100				
	h		441				341	750				
主要尺寸 main dimension	H		2310				2410	2310				2570
	H1		940				1040	940				1080
	H2		392	542	692	842		542	692	842	992	1042
	H3		2812	2962	3112	3262		2962	3112	3262	3412	3462
	K		2500					3000				
	W		4900	5500				5400	5500			
	B		6734	7344				7354	7464			7398
	B1		260					260				
最大轮压 Max.Wheel Loading		kN	215	228	240	249	259	225	239	250	260	272
电机总功率 Total Power		kw	71					94.5				
荐用钢轨 Crane Rail Recommended			43kg/m 或 QU70									
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V									

WEIHUA

32t电磁挂梁桥式起重机（挂梁平行主梁）

32t Electromagnetic Overhead Crane with Carrier-beam

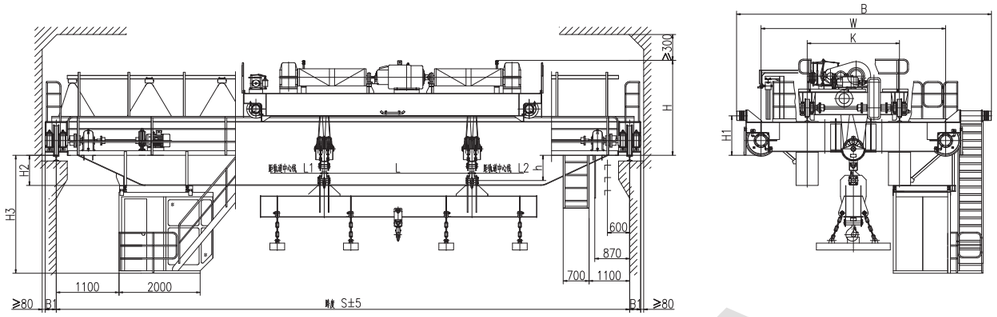


技术规格　Technical Specifications

起重量 Lifting capacity		t	32									
跨度 Span		m	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			15					16				
工作制度 Duty			A6					A7				
速度 Speed	起升 Hoisting	m/min	12.5					15.1				
	小车运行 Crab travelling		37					43.3				
	大车运行 Crane travelling		87.3					104.3				
极限尺寸 limit dimension	L	mm	4000					4000				
	L1		2350					2650				
	L2		2100					2400				
	h		494				390	750				
主要尺寸 main dimension	H	mm	2626				2730	2750				2860
	H1		1070				1170	1110				1210
	H2		416	566	716	816	820	566	716	866	1016	1020
	H3		2836	2986	3136	3236	3240	2986	3136	3286	3436	3440
	K		3000					3000				
	W		5300	5500				5300	5500			
	B		7258	7478				7378	7482			
	B1		300					300				
最大轮压 Max.Wheel Loading		kN	305	322	332	345	357	320	335	348	360	370
电机总功率 Total Power		kw	111.3					135.5				
荐用钢轨 Crane Rail Recommended			43kg/m 或 QU70					QU80				
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V									

40t电磁挂梁桥式起重机（挂梁平行主梁）

40t Electromagnetic Overhead Crane with Carrier-beam

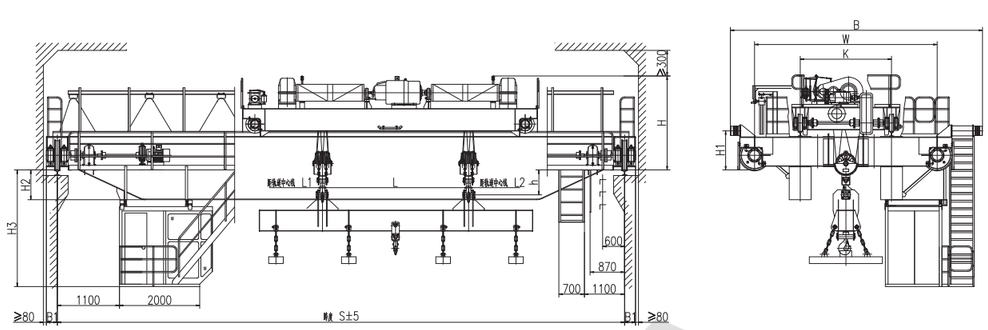


技术规格　Technical Specifications

起重量 Lifting capacity		t	20+20									
跨度 Span		m	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16					16				
工作制度 Duty			A6					A7				
速度 Speed	起升 Hoisting	m/min	11.7					15.3				
	小车运行 Crab travelling		37.5					43.2				
	大车运行 Crane travelling		87.3					113.9				
极限尺寸 limit dimension	L	mm	4000					4000				
	L1		2650					2650				
	L2		2400					2400				
	h		470				368	750				
主要尺寸 main dimension	H	mm	2754				2856	2800				2900
	H1		1130				1230	1130				1230
	H2		400	550	700	800	802	550	700	850	1000	1002
	H3		2820	2970	3020	3220	3222	2970	3120	3270	3420	3422
	K		3000					3000				
	W		5300	5500				5300	5500			
	B		7430	7630	7562			7360	7560	7630		
	B1		300					300				
最大轮压 Max.Wheel Loading		kN	330	347	358	375	385	345	363	375	390	399
电机总功率 Total Power		kw	128.5		142.5			173				
荐用钢轨 Crane Rail Recommended			QU100									
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V									

WEIHUA

15t电磁挂梁桥式起重机(挂梁垂直主梁)

15t Electromagnetic Overhead Crane with Carrier-beam

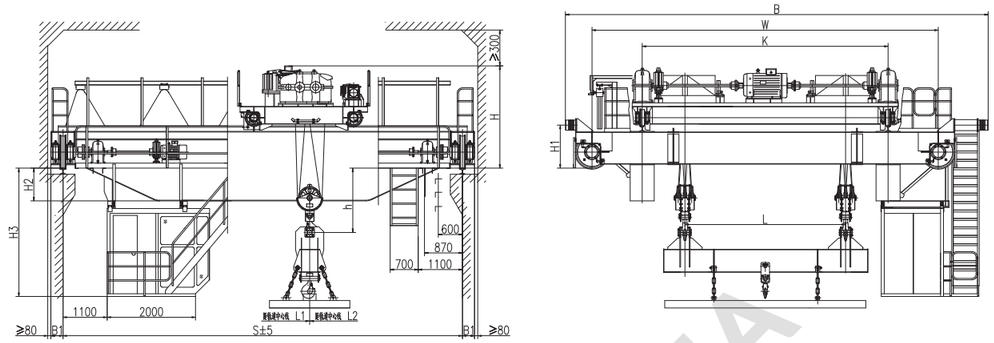


技术规格 Technical Specifications

起重量 Lifting capacity		t	7.5+7.5									
跨度 Span		m	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16					16				
工作制度 Duty			A6					A7				
速度 Speed	起升 Hoisting	m/min	13.2					15.8				
	小车运行 Crab travelling		36.7					36.6				
	大车运行 Crane travelling		101.4					103.9				
极限尺寸 limit dimension	L	mm	3000					4000				
	L1		1500					1500				
	L2		1500					1500				
	h		441				341	750				650
主要尺寸 main dimension	H		2190				2290	2300				2400
	H1		940				1040	940				1040
	H2		392	542	692	842		394	544	694	844	
	H3		2812	2962	3112	3262		2814	2964	3114	3264	
	K		5000					6000				
	W		7400	8000				8400	9000			
	B		9234	9844				10284	10894	10964		
	B1		260					260				
最大轮压 Max.Wheel Loading		kN	190	205	217	229	244	205	219	230	237	250
电机总功率 Total Power		kw	63					79.5				
荐用钢轨 Crane Rail Recommended			43kg/m 或 QU70									
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V									

20t电磁挂梁桥式起重机(挂梁垂直主梁)

20t Electromagnetic Overhead Crane with Carrier-beam

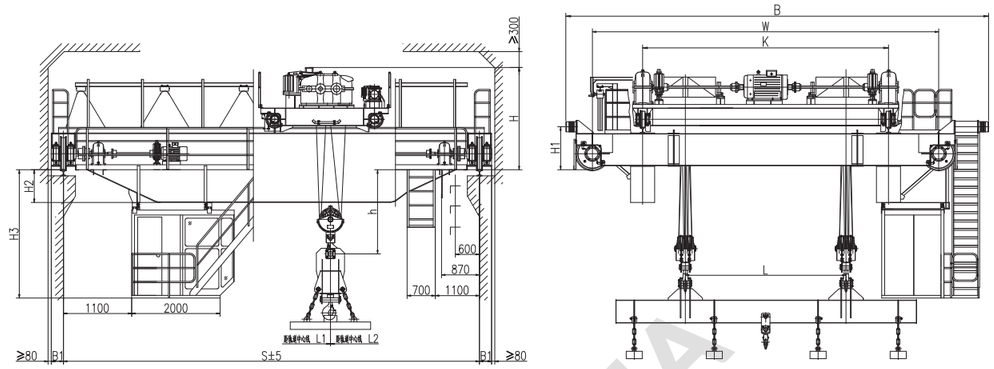


技术规格 Technical Specifications

起重量 Lifting capacity		t	10+10									
跨度 Span		m	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16					15				
工作制度 Duty			A6					A7				
速度 Speed	起升 Hoisting	m/min	12.6					15.8				
	小车运行 Crab travelling		36.2					42.8				
	大车运行 Crane travelling		89					103.9				
极限尺寸 limit dimension	L	mm	4000					4000				
	L1		1500					1700				
	L2		1500					1700				
	h		439				339	900				800
主要尺寸 main dimension	H		2292				2392	2310				2570
	H1		940				1040	940				1080
	H2		394	544	694	844		544	694	844	994	1044
	H3		2814	2964	3114	3264		2964	3114	3264	3414	3464
	K		6000					6000				
	W		8400	9000				8400	9000			
	B		10234	10844				10354	10964			
	B1		260					260				
最大轮压 Max.Wheel Loading		kN	225	236	251	260	270	235	247	263	271	280
电机总功率 Total Power		kw	71					94.5				
荐用钢轨 Crane Rail Recommended			43kg/m 或 QU70									
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V									

WEIHUA

32t电磁挂梁桥式起重机(挂梁垂直主梁)

32t Electromagnetic Overhead Crane with Carrier-beam

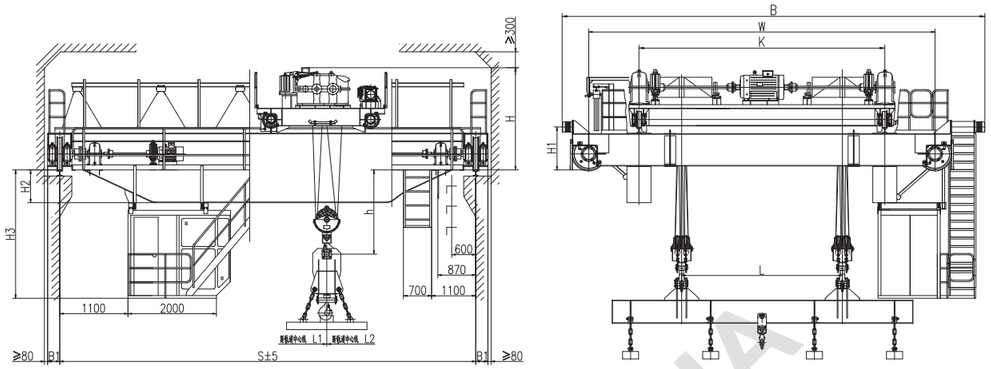


技术规格 Technical Specifications

起重量 Lifting capacity		t	16+16									
跨度 Span		m	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			15					16				
工作制度 Duty			A6					A7				
速度 Speed	起升 Hoisting	m/min	12.5					15.1				
	小车运行 Crab travelling		37					43.3				
	大车运行 Crane travelling		87.3					104.3				
极限尺寸 limit dimension	L	mm	4000					4000				
	L1		1700					1700				
	L2		1700					1800				
	h		690				590	900				800
主要尺寸 main dimension	H		2540				2640	2650				2750
	H1		1070				1170	1070				1110
	H2		420	570	720	820	820	570	720	870	1020	1020
	H3		2840	2990	3140	3240	3240	2990	3140	3290	3440	3440
	K		6000					6500				
	W		8300	8500				8800	9000			
	B		10258	10478				10878	10982			11054
	B1		300					300				
最大轮压 Max.Wheel Loading		kN	315	330	343	355	365	330	345	358	370	380
电机总功率 Total Power		kw	111.3					135.5				
荐用钢轨 Crane Rail Recommended			43kg/m 或 QU70					QU80				
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V									

40t电磁挂梁桥式起重机(挂梁垂直主梁)

40t Electromagnetic Overhead Crane with Carrier-beam

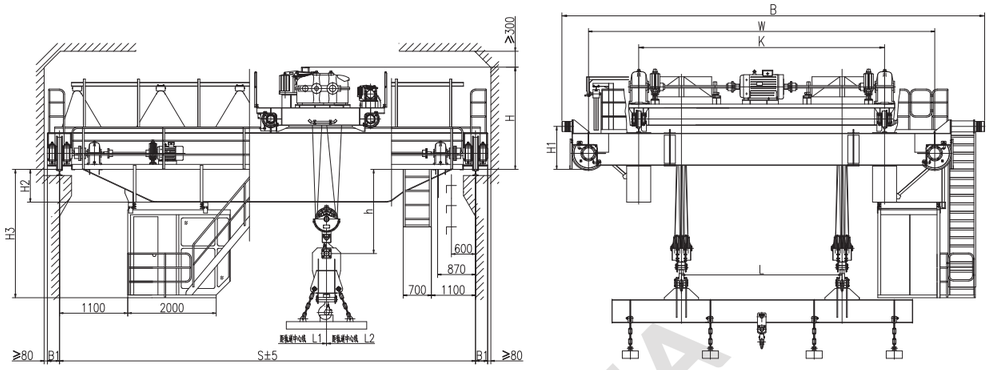


技术规格 Technical Specifications

起重量 Lifting capacity		t	20+20									
跨度 Span		m	22.5	25.5	28.5	31.5	34.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16					16				
工作制度 Duty			A6					A7				
速度 Speed	起升 Hoisting	m/min	11.7					15.3				
	小车运行 Crab travelling		37.5					43.2				
	大车运行 Crane travelling		87.3					113.9				
极限尺寸 limit dimension	L	mm	4000					4000				
	L1		1600					1600				
	L2		1800					1800				
	h		668				566	900				800
主要尺寸 main dimension	H		2642				2744	2750				2850
	H1		1130				1230	1130				1230
	H2		402	552	702	802	804	552	702	852	1002	1004
	H3		2822	2972	3022	3222	3224	2972	3122	3272	3422	3424
	K		6500					6500				
	W		8800	9000				8800	9000			
	B		10930	11130	11062			10862	11062	11132		
	B1		300					300				
最大轮压 Max.Wheel Loading		kN	358	375	388	405	425	373	390	403	420	440
电机总功率 Total Power		kw	128.5		142.5			173				
荐用钢轨 Crane Rail Recommended			QU100									
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V									

WEIHUA

20t上旋挂梁桥式起重机

20t High level slewing Overhead Crane with Carrier-beam

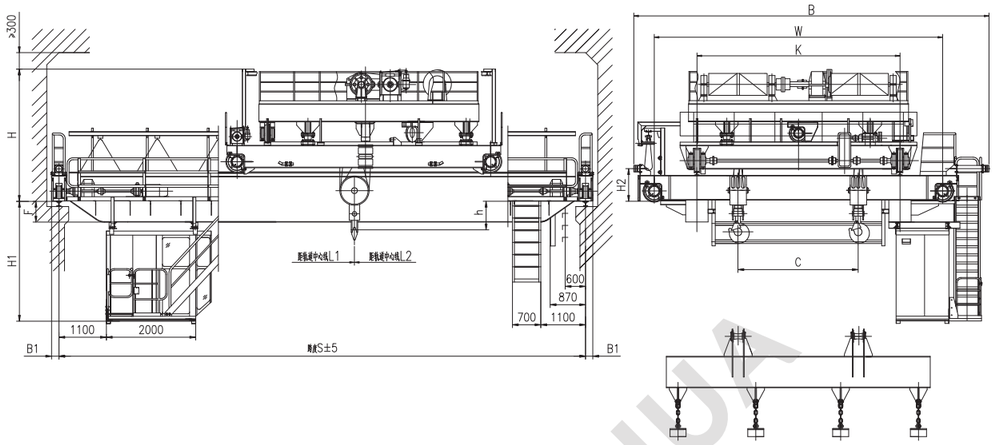


技术规格　Technical Specifications

起重量 Lifting capacity		t	20											
跨度 Span		m	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16						16					
工作制度 Duty			A6						A7					
速度 Speed	主钩 Main	m/min	13.4						15.8					
	旋转 Turn round		1.6r/min						1.6r/min					
	小车运行 Crab travelling		37						43					
	大车运行 Crane travelling		87.3						104.3					
极限尺寸 limit dimension	L1	mm	4000						4000					
	L2		3700						3700					
	C		3900						3900					
	h		650						650					
主要尺寸 main dimension	H	mm	4000					4100	4000					4100
	H1		2686	2836	2986	3136	3236	3236	2786	2936	3086	3236	3336	3336
	H2		1200						1200					
	W		8200		8500				8200		8500			
	B		10108		10328				10108		10328			
	K		6000						6000					
	B1		300						300					
	F		266	416	566	716	816	816	366	516	666	816	916	916
最大轮压 Max.Wheel Loading		kN	301	315	332	343	355	370	312	326	344	355	367	383
电机总功率 Total Power		kw	95.3						112.5					
荐用钢轨 Crane Rail Recommended			QU80											
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V											

32t上旋挂梁桥式起重机

32t High level slewing Overhead Crane with Carrier-beam

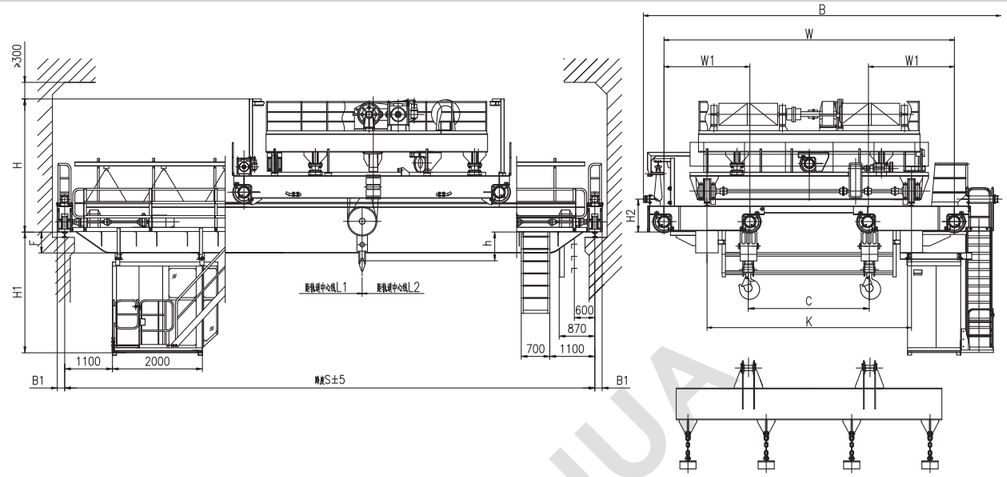


技术规格　Technical Specifications

起重量 Lifting capacity		t	32											
跨度 Span		m	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16						16					
工作制度 Duty			A6						A7					
速度 Speed	主钩 Main	m/min	12.8						15					
	旋转 Turn round		1.64r/min						1.64r/min					
	小车运行 Crab travelling		32						43					
	大车运行 Crane travelling		90.8						106.4					
极限尺寸 limit dimension	L1	mm	4100						4150					
	L2		3800						3800					
	C		3800						3800					
	h		750						750					
主要尺寸 main dimension	H	mm	4250					4350	4400					4500
	H1		2672	2822	2972	3122	3224	3224	2772	2922	3072	3222	3324	3324
	H2		1200						1200					
	W		8300		8500				8300		8500			
	W1		2300		2500				2300		2500			
	B		10358		10558				10358		10558			
	K		6000						6000					
	B1		300						300					
	F		252	402	552	702	804	804	352	502	652	802	904	904
最大轮压 Max.Wheel Loading		kN	201	210	220	232	240	252	208	219	230	243	255	266
电机总功率 Total Power		kw	134.3						159.3					
荐用钢轨 Crane Rail Recommended			QU80											
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V											

40t上旋挂梁桥式起重机

40t High level slewing Overhead Crane with Carrier-beam

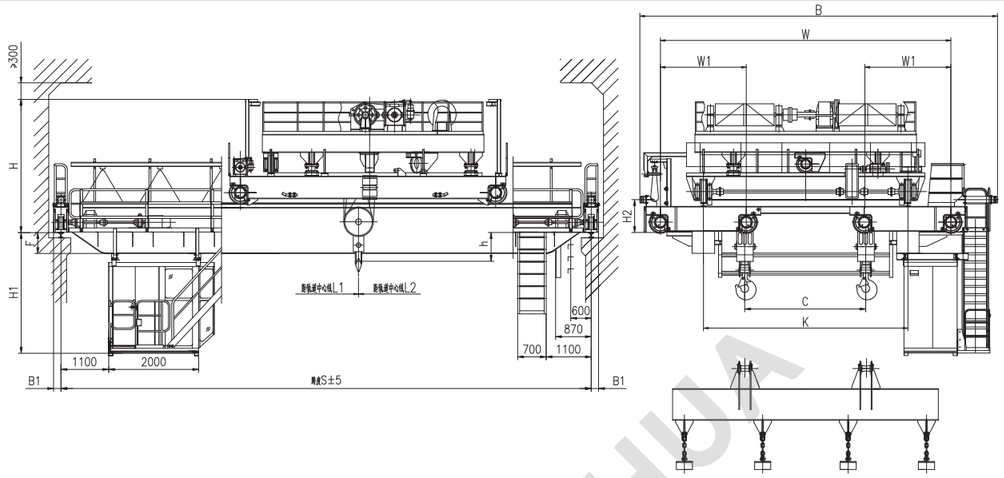


技术规格　Technical Specifications

起重量 Lifting capacity		t	40											
跨度 Span		m	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16						16					
工作制度 Duty			A6						A7					
速度 Speed	主钩 Main	m/min	12						15					
	旋转 Turn round		1.56r/min						1.64r/min					
	小车运行 Crab travelling		33.5						43					
	大车运行 Crane travelling		90.8						106.4					
极限尺寸 limit dimension	L1	mm	4150						4150					
	L2		3850						3850					
	C		3800						3800					
	h		850						850					
主要尺寸 main dimension	H		4550					4650	4670					4770
	H1		2724	2874	3024	3174	3324	3324	2824	2974	3124	3274	3424	3424
	H2		1200						1200					
	W		8300		8500				8300		8500			
	W1		2300		2500				2300		2500			
	B		10358		10558				10358		10558			
	K		6000						6000					
	B1		300						300					
	F		304	454	604	754	904	904	404	554	704	854	1004	1004
最大轮压 Max.Wheel Loading		kN	228	240	255	265	275	288	239	250	267	273	290	303
电机总功率 Total Power		kw	149.3						183.3					
荐用钢轨 Crane Rail Recommended			QU80											
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V											

20t下旋挂梁桥式起重机

20t Low Level Slewing Overhead Crane with Carrier-beam

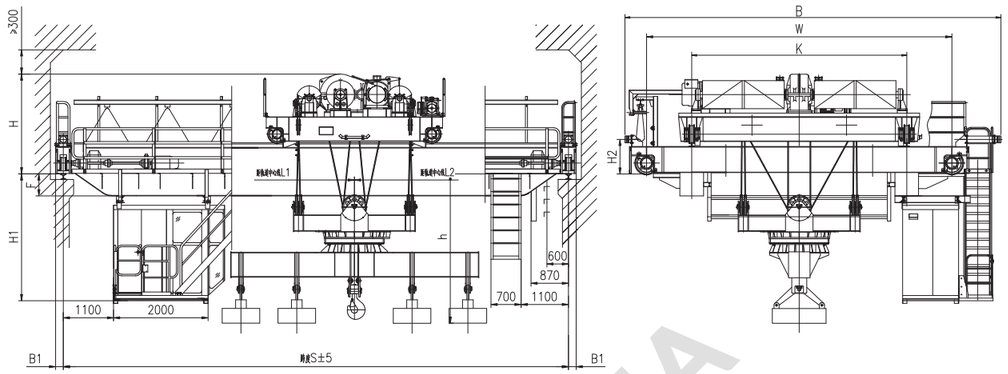


技术规格　Technical Specifications

起重量 Lifting capacity		t	20											
跨度 Span		m	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16						16					
工作制度 Duty			A6						A7					
速度 Speed	主钩 Main	m/min	13.4						14.7					
	旋转 Turn round		1.2r/min						1.2r/min					
	小车运行 Crab travelling		37						43					
	大车运行 Crane travelling		87.3						104.3					
极限尺寸 limit dimension	L1	mm	2200						2200					
	L2		2500						2500					
	h		3400						3400					
主要尺寸 main dimension	H		2700					2800	2800					2900
	H1		2686	2836	2986	3136	3236	3236	2786	2936	3086	3236	3336	3336
	H2		1200						1200					
	W		7700		8000				7700		8000			
	B		9608		9828				9608		9828			
	K		5500						5500					
	B1		300						300					
	F		266	416	566	716	816	816	366	516	666	816	916	916
最大轮压 Max.Wheel Loading		kN	232	245	265	280	295	312	243	257	278	293	309	328
电机总功率 Total Power		kw	113.5						122.7					
荐用钢轨 Crane Rail Recommended			QU80											
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V											

25t下旋挂梁桥式起重机

25t Low Level Slewing Overhead Crane with Carrier-beam

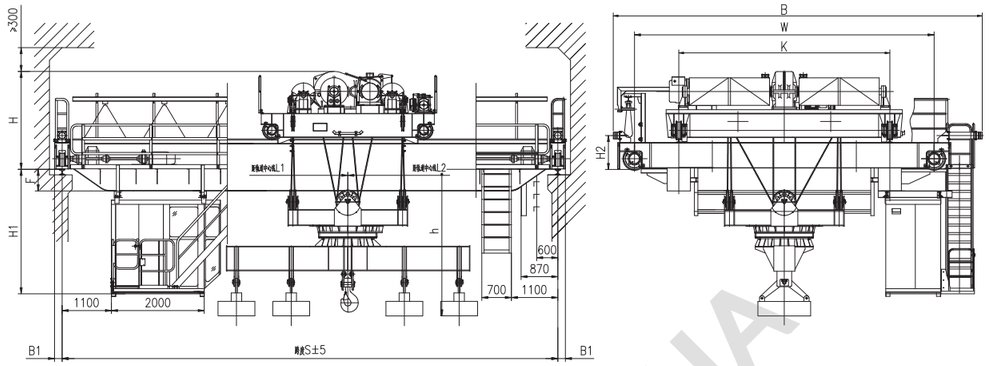


技术规格　Technical Specifications

起重量 Lifting capacity		t	25											
跨度 Span		m	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16						16					
工作制度 Duty			A6						A7					
速度 Speed	主钩 Main	m/min	11.8						14.7					
	旋转 Turn round		1.2r/min						1.2r/min					
	小车运行 Crab travelling		37						43					
	大车运行 Crane travelling		87.3						104.3					
极限尺寸 limit dimension	L1	mm	2200						2200					
	L2		2500						2500					
	h		3400						3400					
主要尺寸 main dimension	H	mm	2754					2854	2850					2950
	H1		2690	2840	2990	3140	3240	3240	2790	2940	3090	3240	3340	3340
	H2		1200						1200					
	W		7700		8000				7700		8000			
	B		9608		9828				9608		9828			
	K		5500						5500					
	B1		300						300					
	F		270	420	570	720	820	820	370	520	670	820	920	920
最大轮压 Max.Wheel Loading		kN	272	285	295	305	325	344	286	297	308	319	340	362
电机总功率 Total Power		kw	114.3						122.7					
荐用钢轨 Crane Rail Recommended			QU80											
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V											

32t下旋挂梁桥式起重机

32t Low Level Slewing Overhead Crane with Carrier-beam

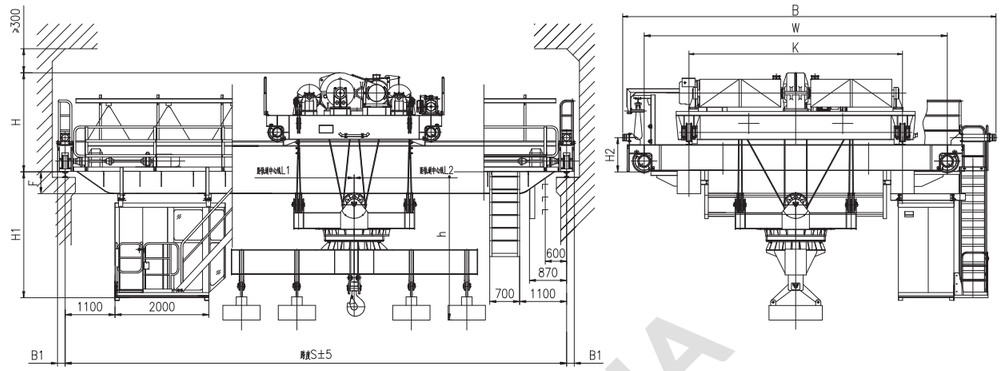


技术规格　Technical Specifications

起重量 Lifting capacity		t	32											
跨度 Span		m	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16						16					
工作制度 Duty			A6						A7					
速度 Speed	主钩 Main	m/min	10.6						13.4					
	旋转 Turn round		1.3r/min						1.3r/min					
	小车运行 Crab travelling		38.5						43.1					
	大车运行 Crane travelling		103.8						113.9					
极限尺寸 limit dimension	L1	mm	2400						2400					
	L2		2700						2700					
	h		3800						3800					
主要尺寸 main dimension	H	mm	2910					3010	3040					3140
	H1		2674	2824	2974	3124	3224	3224	2774	2924	3074	3224	3324	3324
	H2		1200						1200					
	W		7800		8000				7700		8000			
	B		9858		10058				9608		9828			
	K		5500						5500					
	B1		300						300					
	F		254	404	554	704	804	804	354	504	654	804	904	904
最大轮压 Max.Wheel Loading		kN	328	340	355	365	385	407	344	358	373	384	405	425
电机总功率 Total Power		kw	148						178.5					
荐用钢轨 Crane Rail Recommended			QU80											
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V											

40t下旋挂梁桥式起重机

40t Low Level Slewing Overhead Crane with Carrier-beam

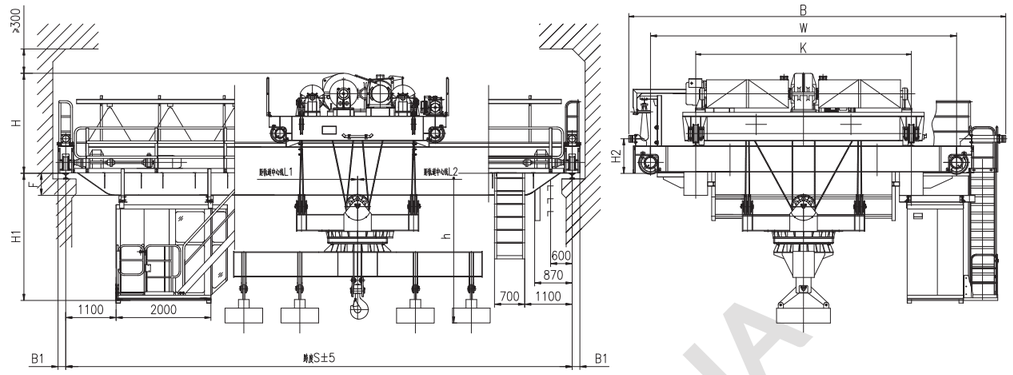


技术规格　Technical Specifications

起重量 Lifting capacity		t	40											
跨度 Span		m	19.5	22.5	25.5	28.5	31.5	34.5	19.5	22.5	25.5	28.5	31.5	34.5
起升高度 Lifting Height			16						16					
工作制度 Duty			A6						A7					
速度 Speed	主钩 Main	m/min	10.5						13.4					
	旋转 Turn round		1.3r/min						1.3r/min					
	小车运行 Crab travelling		37.5						43.1					
	大车运行 Crane travelling		103.8						106.4					
极限尺寸 limit dimension	L1	mm	2500						2500					
	L2		2800						2850					
	h		4000						4000					
主要尺寸 main dimension	H	mm	3020					3120	3209					3309
	H1		2674	2924	3074	3224	3324	3224	2774	3024	3174	3324	3424	3424
	H2		1200						1200					
	W		7800		8000				7800		8000			
	B		9858		10058				9858		10058			
	K		5500						5500					
	B1		300						300					
	F		254	504	654	804	904	904	354	604	754	904	1004	1004
最大轮压 Max.Wheel Loading		kN	366	385	405	413	430	448	390	406	425	434	449	470
电机总功率 Total Power		kw	170						205.5					
荐用钢轨 Crane Rail Recommended			QU80						QU100					
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V											


下旋转伸缩挂梁电磁桥式起重机

Low level slewing telescopic electromagnetic Overhead Crane with Carrier-beam

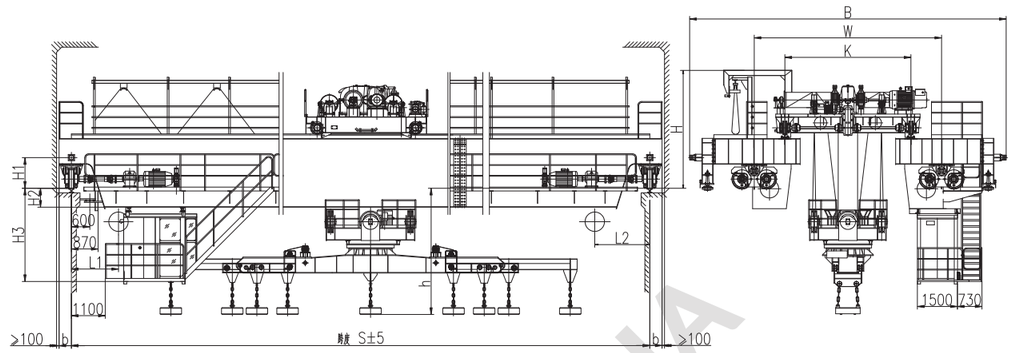

技术规格　Technical Specifications

起重量 Lifting capacity		t	15	25	30
跨度 Span		m	34.3	46.3	53.3
起升高度 Lifting Height			5.5	5	5
伸缩幅度 **Telescopic Amplitude**			9/13	13/18	15/18
工作制度 Duty			A6	A6	A6
速度 Speed	起升 Hoisting	m/min	10.6	10.5	10.5
	小车运行 Crab travelling		38.5	37.5	37.5
	大车运行 Crane travelling		82.5	82.5	82.5
	旋转 Revolve		1.21	1.37	1.37
	伸缩 **Telescopic**		5/10	5/10	5/10
极限尺寸 limit dimension	L1	mm	2800	2800	2850
	L2		2600	2600	2700
	h		4300	4600	4800
主要尺寸 main dimension	H	mm	3650	3560	4350
	H1		1000	1000	1000
	H2		320	865	895
	H3		2740	3285	3315
	K		4500	5500	2000
	W		6300	7500	8000
	B		10710	10270	12110
	b		400	400	400
最大轮压 Max.Wheel Loading		kN	216	322	405
电机总功率 Total Power		kw	142.5	181	232.9
荐用钢轨 Crane Rail Recommended			QU100		
电源 Power Supply			三相交流 3—Phase A.C.50Hz 380V		

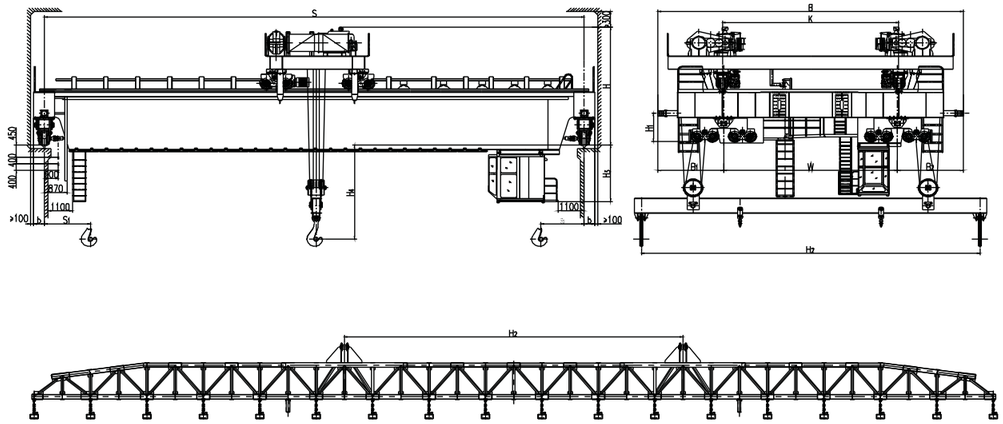

超长电磁挂梁桥式起重机

OVER LENGTH ELECTROMAGNETIC OVERHEAD CRANE WITH CARRIER-BEAM

产品概述：


本起重机带有超长电磁挂梁，用于钢厂、船厂、港口、堆场和仓储等室内或露天的固定跨间，装卸及搬运钢板等物料。特别适用于吊运宽度≤3500mm，长度≤43000mm的中厚钢板的搬运场合，能够根据所吊物料的规格和重量，调节电磁铁磁力。可以根据用户要求提供：不同的挂梁长度，各机构的调速（1：10或更大）、超载及报警、遥控、PLC控制及故障检测、显示系统等。（以下参数为室内用）

Product Introduction:

The crane has over length electromagnetic carrier-beam, and is used in the fixed span at indoors or outdoors of steel mill, shipyard, port and storage, etc. It is used for loading, unloading and carrying slab of steel plate and profile steel, etc. It is especially applicable to lift steel slab of moderate thickness: thickness is ⩽ 3500mm and length is ⩽ 43000mm. The magnetic force of electromagnet can be adjusted according to the specifications and weight of the lifted material. The followings can be supplied according to the user' s requirements: different length of carrier-beam, speed governing(1: 10 or larger) of the mechanisms, overload & warning, remote control, PLC control, failure detection and display system, etc. (the data below is used for indoor)

技术参数　Technical Data

净起重量 Net capacity			t	30
工作级别 Working system				A7
跨度 Span			m	38.5
最大起升高度 Max.Lifting Height				7.5
速度 Speed	起升 lifting		m/min	0.76 ~ 7.6
	运行 travelling	小车 trolley		4.2 ~ 42
		大车 crane		9.1 ~ 91
主要尺寸 (mm) Dimensions			H	4950
			H_1	1650
			H_3	3150
			H_4	600
			k	12500
			B	21000
			w	12300
			b	450
			B_1	4350
			B_2	4350
			S_1	2500
			S_2	2500
最大轮压 Max wheel load			KN	354
荐用钢轨 Steel track				QU120
电源Power source				三相交流　380V　50HZ　3-Phase A.C.　380V 50HZ

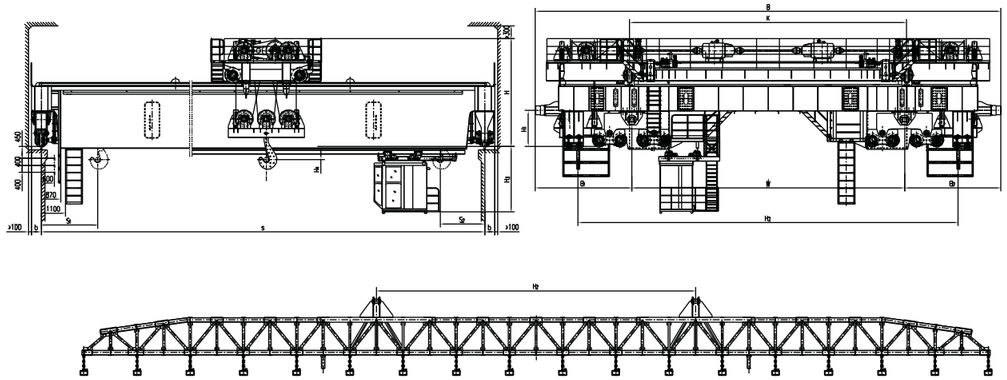

超长电磁挂梁桥式起重机

OVER LENGTH ELECTROMAGNETIC OVERHEAD CRANE WITH CARRIER-BEAM

产品概述：

本起重机司机室可以移动，带有超长电磁挂梁，用于钢厂、船厂、港口、堆场和仓储等室内或露天的固定跨间，装卸及搬运钢板等物料。特别适用于吊运宽度≤4200mm，长度≤46000mm的中厚钢板的搬运场合，能够根据所吊物料的规格和重量，调节电磁铁磁力。可以根据用户要求提供：不同的挂梁长度，各机构的调速（1：10或更大）、超载及报警、遥控、PLC控制及故障检测、显示系统等。
（以下参数为室内用）

Product Introduction:

Cab of the crane can be moved. The crane has over length electromagnetic carrier-beam, and is used in the fixed span at indoors or outdoors of steel mill, shipyard, port and storage, etc. It is used for loading, unloading and carrying slab of steel plate and profile steel, etc. It is especially applicable to lift steel slab of moderate thickness: thickness is ≤4200mm and length is ≤46000mm. The magneticforce of electromagnet can be adjusted according to the specifications and weight of the lifted material. The followings can be supplied according to the user' s requirements: different length of carrier-beam, speed governing (1: 10 or larger) of the mechanisms, overload & warning, remote control, PLC control, failure detection and display system, etc. (the data below is used for indoor).

技术参数　Technical Data

净起重量 Net capacity			t	55
工作级别 Working system				A7
跨度 Span			m	27
最大起升高度 Max.Lifting Height				5.5
速度speed	起升 lifting		m/min	1.54 ~ 15.4
	运行 travelling	小车 trolley		4.2 ~ 42
		大车 crane		8.7 ~ 87
主要尺寸 (mm) Dimensions			H	5650
			H_1	1650
			H_3	2450
			H_4	2600
			k	7500
			B	13200
			w	7400
			b	450
			B_1	2800
			B_2	2800
			S_1	2500
			S_2	2500
最大轮压 Max wheel load			KN	318
荐用钢轨 Steel track				QU120
电源Power source				三相交流　380V　50HZ　3-Phase A.C.　380V 50HZ



35~65t夹钳桥式起重机

OVERHEAD CRANE WITH TONGS CAP.35-65T

产品概述：


本夹钳起重机夹钳平行于主梁，用于钢厂、船厂、港口、堆场和仓储等室内或露天的固定跨间，装卸及搬运钢板板坯、型材等物料。

特别适用于吊运不同规格的板坯场合，能够根据所吊物料的规格（不同厚度、长度、张数等）和重量，配备不同的夹钳满足吊运的要求。

根据客户要求可提供：各机构的调速（1：1 0或更大）、超载及报警、遥控、PLC控制及故障检测、显示系统等。


Product Introduction:

The tongs of the tongs bridge crane is crane is perpendicular to the girder; is used in the fixed span at indoors or outdoors of steel mill, shipyard port and storage, etc. It is especially applicable to lift slab of different specifications; different kinds of tongs can be equipped in it to meet the requirements of lifting according to the specification (different thickness, length and pieces, etc.) and weight of the lifted materials. The followings can be supplied according to the use's requirements: speed governing (1.10 or larger) of the mechanisms, overload & warning, remote control, PLC control, failure detection and display system, etc.

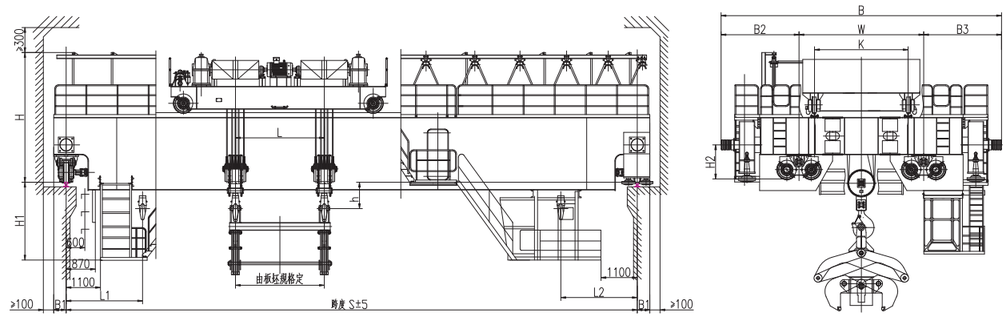


技术规格　Technical Specifications

净起重量 Net Capacity			35	50	65
跨度 Span		m	27.5	37	35.5
起升高度 Lifting Height			12	12	12
工作制度 Duty			A7		
速度 Speed	起升 Hositing	m/min	1.2~12	0.95~9.5	0.78~78
	小车运行 Crab travelling		4.2~42	3.8~38	3.8~38
	大车运行 Crane travelling		8.5~85	8~80	7.5~75
极限尺寸 limit dimension	L1	mm	2500	2850	2650
	L2		2500	2500	2500
	L		3000	3000	3000
	h		750	850	950
主要尺寸 main dimension	H	mm	4450	4850	4650
	H1		2650	2800	2700
	H2		1200	1200	1200
	B		9400	9400	9900
	K		3500	3500	4000
	W		4500	4500	5000
	B1		400	400	400
	B2		2450	2450	2450
	B3		2450	2450	2450
最大轮压 Max.Wheel Loading		kN	375	485	465
荐用钢轨 Crane Rail Recommended			QU120		
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V		

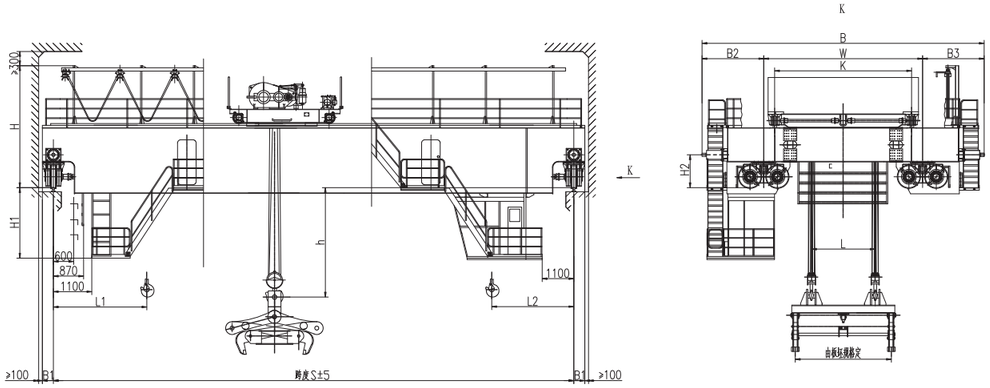

技术规格　Technical Specifications

净起重量 Net Capacity			35	50	65
跨度 Span		m	27.5	37	35.5
起升高度 Lifting Height			12	12	12
工作制度 Duty			A7		
速度 Speed	起升 Hositing	m/min	0.95~9.5	0.95~9.5	0.78~78
	小车运行 Crab travelling		3.8~38	3.8~38	3.8~38
	大车运行 Crane travelling		8.5~85	8~80	7.5~75
极限尺寸 limit dimension	L1	mm	2500	2500	2500
	L2		2500	2650	2650
	L		2500	2500	2500
	h		650	750	950
主要尺寸 main dimension	H	mm	4450	4850	4650
	H1		2650	2800	2700
	H2		1200	1200	1200
	B		10900	10900	11400
	K		5000	5000	5500
	W		6000	6000	6500
	B1		400	400	400
	B2		2450	2450	2450
	B3		2450	2450	2450
最大轮压 Max.Wheel Loading		kN	382	494	473
荐用钢轨 Crane Rail Recommended			QU120		
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V		

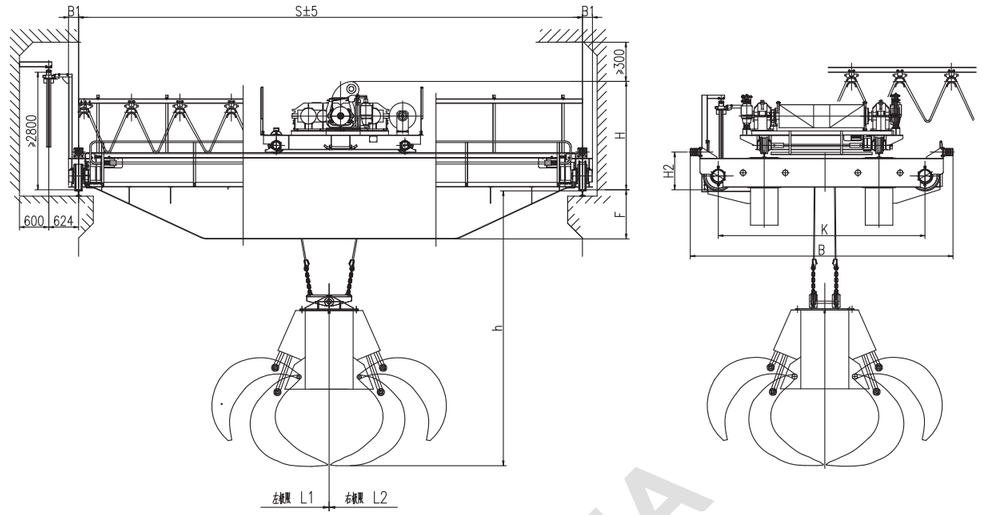

垃圾抓斗起重机
GRAB CRANE FOR GARBAGE

产品概述：


垃圾抓斗起重机是现代城市各种垃圾焚烧发电厂垃圾供料系统的核心设备，位于垃圾储存坑的上方，主要承担对垃圾的投料、搬运、搅拌、取物和称重等作业。我公司生产的垃圾抓斗起重机能执行严格的提升及输送作业，确保垃圾焚烧发电厂的正常作业，本起重机能实现手动、半自动、全自动控制。


Product Introduction:

Grab crane for garbage is the key device used in the garbage feed system of diffe rent kinds of Garbage-Cremation Power Plant in modern city. It is located at the top of garbage storing pit, and is mainly used for operation of feeding, conveying, mixing, fetching and weighing of the garbage. The garbage grab craneman-ufactured by our company canimplement lifting and conveying strictly to ensure normal workof Garbage-Cremation Power Plant. This crane can be controlled by hand, semi-automatically or automatical-ly.

技术规格 Technical Specifications

生产率 Productivity		t/d	800~1000				1000~1200					1200~1500				
起重量 Lifting capacity		t	8				10					12.5				
抓斗容积Volumn of Grab		m^3	5				6.3					8				
跨度 Span		m	22.5	25.5	28.5	31.5	19.5	22.5	25.5	28.5	31.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height			34				36					36				
工作制度 Duty			A8				A8					A8				
速度 Speed	起升 Lifting	m/min	起升 4.5~45				起升 4.5~45					起升 5~50				
			下降 6~60				下降 6~60					下降 7~65				
	小车运行 Crab travelling		4.5~45				4.85~48.5					5~50				
	大车运行 Cranetravelling		4.8~48				6.5~65					7~70				
极限尺寸 limit dimension	L1	mm	2600				2600					2850				
	L2		2600				2600					2850				
	h		6000				6000					6000				
主要尺寸 main dimension	H	mm	2300				2375					2550				
	B		5724				5724					5875				
	K		2500				2500					2650				
	B1		230				230					230				
	F		618	718	818	968	643	743	843	845	995	575	655	757	907	1057
最大轮压 Max.Wheel Loading		kN	117	125	134	141	136	143	151	162	170	155	165	175	185	195
电机总功率 Total Power		kw	106				135					190				
荐用钢轨 Crane Rail Recommended			43kg/m				QU70					50kg/m 或 QU70				
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V													

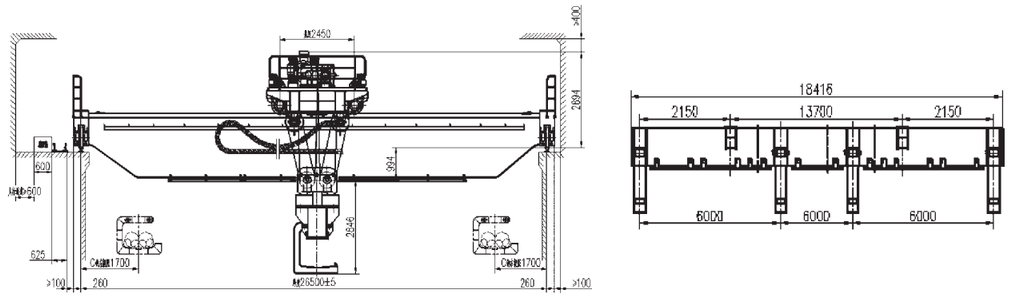

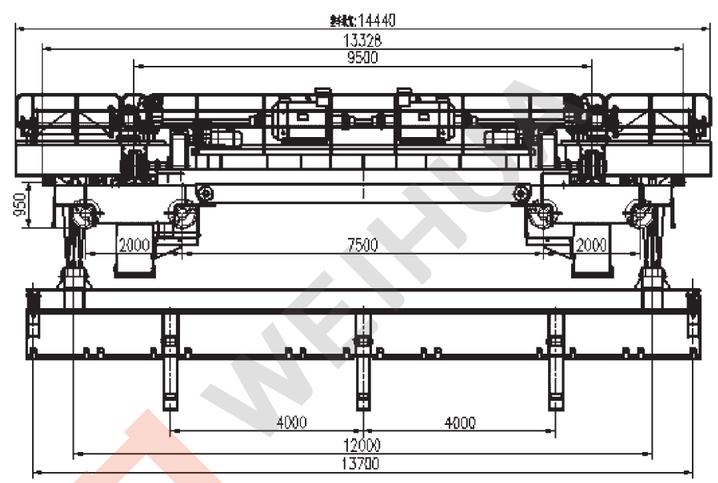

钢管智能分配起重机

INTELLIGENT STEEL TUBE ALLOCATION CRANE

产品概述：

该起重机主要用于生产线中排锯之前的钢管分配工段，可实现从某个滚道取料后可向任何指定辊道上直接放料，使钢管分配工艺流程实现智能化。

该起重机主要有以下特点：

(1) 通过编码器输入位置信号给PLC，实现自动精确定位，通过PLC计算加减速，并且采用V型结构钢丝绳轮系布置防摇，起重机载荷摇摆的幅度小，提高了起重机使用的生产效率和安全性。

(2) 采用冗余设计方案，起升机构、小车运行机构及电气控制部分均配置了备份系统，提高了可靠性。


(3) 电气控制采用防摇摆和精确自动定位控制系统，实现全自动快速智能分配搬运钢管。

Product Introduction:

The crane mainly used in the steel tube allocation section which before the row sawing, it also can reclaim form one rollway and directly put on another specific roller bed. At last to make the allocation technology procedure of the steel tube realize intelligent.
This crane mainly has the following characteristics:
(1) The input position signal were sent to the PLC by the coder and realize the auto precisely positioning, through the PLC to calculate the accelerate and decelerate speed, also adopt the V-type wire rope gear to arrange the anti-swing system, with a small load swing of the spreader, improve the working efficiency and safety of the crane
(2) Adopting the redundancy design, the lifting mechanism, trolley traveling mechanism and the electrical control all equipped with standby system to improve the reliability of the crane
(3) Adopting anti swing and precisely auto positioning system, the electrical control can realize the intelligent full automatic allocation and handling of the steel tubes quickly.

技术规格　Technical Specifications

起重量 Lifting Capacity		t	16+16t(净起重量)
跨度 Span		m	26.5
起升高度 Lifting Height		m	7
工作级别 Duty Classification			A7
速度 Speed	起升 Lifting	m/min	1.2-12
	小车运行 Cross Travel		6.2-62
	大车运行 Crane Travelling		20.6
总功率	Total Power	kw	315
最大轮压 Maximum Wheel Load		kN	295
荐用钢轨 Crane Rail Recommended		kg/m	QU100
电源 Power Supply			3P A.C 50Hz 380V

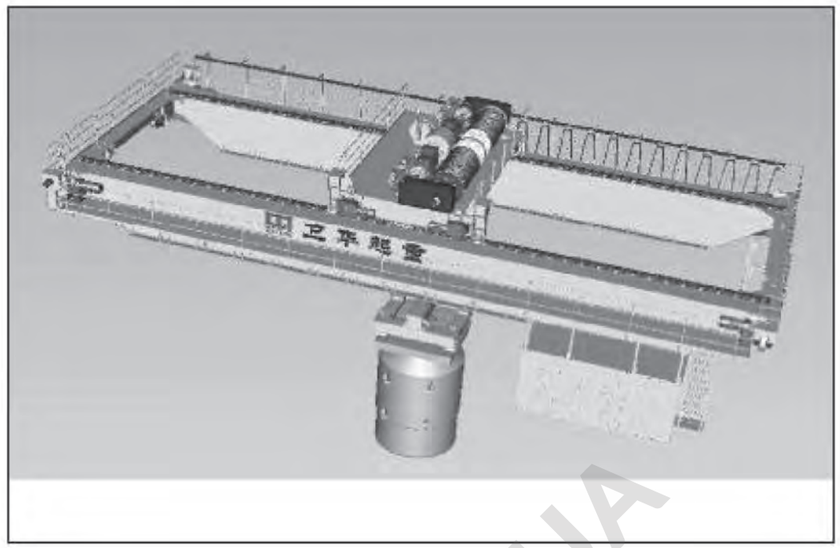


智能冶金上料桥式起重机
INTELLIGENT METALLURGICAL FEEDING CRANE


产品概述：

本起重机主要用于镍业公司镍铁冶炼上料。起重机吊运专用料罐加料，工作级别高,自动化程度高。
该起重机按工艺要求在规定时间内完成整个上料过程，通过公司自主开发的防摇摆技术、精确自动定位技术以及为该起重机专门开发的全自动吊具，成功实现整个上料过程的全自动化。该起重机具有自动识别、自动挂钩、自动脱钩、自动加料、自动换仓等功能，整个过程通过程序控制，无人监控、无人操作，在国内同行业中处于技术领先水平。

Product Introduction:

The main purpose of this crane is Nickel iron smelting feeding for nickel crop, crane special lifting container loading, high level of work, high level of automation.
This crane can finish whole feeding in set time of technological requirements, by means of the technologis which is independent research and development for our crop, swing patent, precise automatic positioning and automatic spreader, realize automatic for whole feeding, this crane has automatic spot couple unhook feed shift etc, the whole process control by order, without supervisory control and operate, it is advanced level in same profession internal.

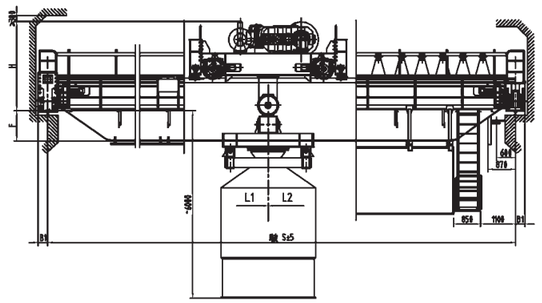

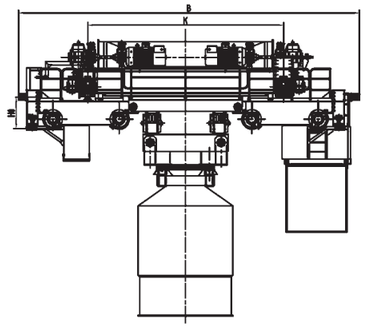

技术规格　Technical Specifications

起重量 Lifting capacity	主钩 Main	t	40	50	60
	副钩 Aux.		--	--	--
跨度 Span		m	22.5	19.5	22.5
起升高度 Lifting Height			35	40	40
			--	--	--
工作制度 Duty			A8	A8	A8
速度 Speed	主钩 Main	m/min	2~20	2~20	1.7~17
	副钩 Aux.		--	--	--
	小车运行 Crab travelling		3.4~34	3.5~35	2.8~28
	大车运行 Crane travelling		5.2~52	5.2~52	5~50
极限尺寸 limit dimension	L1	mm	2900	2900	3000
	L2		3500	3500	3500
主要尺寸 main dimension	H0	mm	1000	1000	1000
	H		2850	2900	3000
	B		11100	11100	11100
	K		6000	6000	6200
	B1		300	300	300
	F		880	670	960
最大轮压 Max.Wheel Loading		kN	210	232	280
电机总功率 Total Power		kw	259	253	302
推用钢轨 Crane Rail Recommended			QU80	QU80	QU100
电源 Power Supply			三相交流 3-Phase A.C.50Hz 380V		